

JUnit 5 User Guide

Table of Contents

1. Overview	7
1.1. What is JUnit 5?	7
1.2. Supported Java Versions	7
1.3. Getting Help	7
1.4. Getting Started	7
1.4.1. Downloading JUnit Artifacts	7
1.4.2. JUnit 5 Features	7
1.4.3. Example Projects	8
2. Writing Tests	8
2.1. Annotations	9
2.1.1. Meta-Annotations and Composed Annotations	10
2.2. Definitions	12
2.3. Test Classes and Methods	12
2.4. Display Names	14
2.4.1. Display Name Generators	15
2.4.2. Setting the Default Display Name Generator	17
2.5. Assertions	17
2.5.1. Kotlin Assertion Support	21
2.5.2. Third-party Assertion Libraries	23
2.6. Assumptions	24
2.7. Exception Handling	25
2.7.1. Uncaught Exceptions	25
2.7.2. Failed Assertions	26
2.7.3. Asserting Expected Exceptions	27
Using <code>assertThrows()</code>	27
Using <code>assertThrowsExactly()</code>	27
2.7.4. Asserting That no Exception is Expected	28
2.8. Disabling Tests	28
2.9. Conditional Test Execution	30
2.9.1. Operating System and Architecture Conditions	30
2.9.2. Java Runtime Environment Conditions	32
2.9.3. Native Image Conditions	34
2.9.4. System Property Conditions	35
2.9.5. Environment Variable Conditions	35
2.9.6. Custom Conditions	36
2.10. Tagging and Filtering	37

2.11. Test Execution Order	38
2.11.1. Method Order	38
Setting the Default Method Orderer	39
2.11.2. Class Order	40
2.12. Test Instance Lifecycle	41
2.12.1. Changing the Default Test Instance Lifecycle	42
2.13. Nested Tests	43
2.14. Dependency Injection for Constructors and Methods	45
2.15. Test Interfaces and Default Methods	49
2.16. Repeated Tests	52
2.16.1. Repeated Test Examples	53
2.17. Parameterized Tests	57
2.17.1. Required Setup	57
2.17.2. Consuming Arguments	57
2.17.3. Sources of Arguments	58
@ValueSource	58
Null and Empty Sources	59
@EnumSource	60
@MethodSource	61
@FieldSource	64
@CsvSource	67
@CsvFileSource	69
@ArgumentsSource	71
Multiple sources using repeatable annotations	72
2.17.4. Argument Count Validation	73
2.17.5. Argument Conversion	73
Widening Conversion	73
Implicit Conversion	73
Explicit Conversion	77
2.17.6. Argument Aggregation	78
Custom Aggregators	79
2.17.7. Customizing Display Names	80
2.17.8. Lifecycle and Interoperability	83
2.18. Test Templates	83
2.19. Dynamic Tests	84
2.19.1. Dynamic Test Examples	84
2.19.2. Dynamic Tests and Named	88
2.19.3. URI Test Sources for Dynamic Tests	89
2.20. Timeouts	90
2.20.1. Thread mode	91
2.20.2. Default Timeouts	91

2.20.3. Using @Timeout for Polling Tests	92
2.20.4. Debugging Timeouts	93
Thread Dump on Timeout	93
2.20.5. Disable @Timeout Globally	93
2.21. Parallel Execution	94
2.21.1. Configuration	97
Relevant properties	97
2.21.2. Synchronization	99
2.22. Built-in Extensions	102
2.22.1. The @TempDir Extension	102
2.22.2. The @AutoClose Extension	107
3. Migrating from JUnit 4	108
3.1. Running JUnit 4 Tests on the JUnit Platform	108
3.1.1. Categories Support	108
3.2. Parallel Execution	108
3.3. Migration Tips	109
3.4. Limited JUnit 4 Rule Support	110
3.5. JUnit 4 @Ignore Support	110
3.6. Failure Message Arguments	111
4. Running Tests	112
4.1. IDE Support	112
4.1.1. IntelliJ IDEA	112
4.1.2. Eclipse	113
4.1.3. NetBeans	113
4.1.4. Visual Studio Code	113
4.1.5. Other IDEs	113
4.2. Build Support	114
4.2.1. Gradle	114
Aligning dependency versions	114
Configuration Parameters	114
Configuring Test Engines	115
Configuring Logging (optional)	115
4.2.2. Maven	116
Aligning dependency versions	116
Configuring Test Engines	117
Filtering by Test Class Names	118
Filtering by Tags	119
Configuration Parameters	119
4.2.3. Ant	120
Basic Usage	120
4.2.4. Spring Boot	121

4.3. Console Launcher	122
4.3.1. Subcommands and Options	124
Discovering tests	124
Executing tests	127
Listing test engines	131
4.3.2. Argument Files (@-files)	131
4.3.3. Color customization	132
4.4. Using JUnit 4 to run the JUnit Platform	132
4.4.1. Setup	133
Explicit Dependencies	133
Transitive Dependencies	133
4.4.2. Display Names vs. Technical Names	133
4.4.3. Single Test Class	133
4.4.4. Test Suite	134
4.5. Discovery Selectors	135
4.6. Configuration Parameters	136
4.6.1. Pattern Matching Syntax	136
4.7. Tags	137
4.7.1. Syntax Rules for Tags	137
4.7.2. Tag Expressions	138
4.8. Capturing Standard Output/Error	138
4.9. Using Listeners and Interceptors	139
4.9.1. Flight Recorder Support	140
4.10. Stack Trace Pruning	140
5. Extension Model	141
5.1. Overview	141
5.2. Registering Extensions	141
5.2.1. Declarative Extension Registration	141
5.2.2. Programmatic Extension Registration	146
Static Fields	146
Instance Fields	148
5.2.3. Automatic Extension Registration	148
Enabling Automatic Extension Detection	149
Filtering Auto-detected Extensions	149
5.2.4. Extension Inheritance	149
5.3. Conditional Test Execution	150
5.3.1. Deactivating Conditions	150
Pattern Matching Syntax	150
5.4. Test Instance Pre-construct Callback	150
5.5. Test Instance Factories	151
5.6. Test Instance Post-processing	151

5.7. Test Instance Pre-destroy Callback	152
5.8. Parameter Resolution	152
5.8.1. Parameter Conflicts	153
5.9. Test Result Processing	157
5.10. Test Lifecycle Callbacks	158
5.10.1. Before and After Test Execution Callbacks	158
5.11. Exception Handling	160
5.12. Pre-Interrupt Callback	162
5.13. Intercepting Invocations	162
5.14. Providing Invocation Contexts for Test Templates	163
5.15. Keeping State in Extensions	164
5.16. Supported Utilities in Extensions	167
5.16.1. Annotation Support	167
5.16.2. Class Support	167
5.16.3. Reflection Support	168
5.16.4. Modifier Support	168
5.16.5. Conversion Support	168
5.16.6. Field and Method Search Semantics	168
5.17. Relative Execution Order of User Code and Extensions	169
5.17.1. User and Extension Code	169
5.17.2. Wrapping Behavior of Callbacks	173
6. Advanced Topics	181
6.1. JUnit Platform Reporting	181
6.1.1. Output Directory	182
6.1.2. Open Test Reporting	182
Gradle	182
Maven	183
Console Launcher	184
6.1.3. Legacy XML format	184
6.2. JUnit Platform Suite Engine	184
6.2.1. Setup	184
Required Dependencies	185
Transitive Dependencies	185
6.2.2. @Suite Example	185
6.2.3. @BeforeSuite and @AfterSuite	185
6.3. JUnit Platform Test Kit	186
6.3.1. Engine Test Kit	186
6.3.2. Asserting Statistics	187
6.3.3. Asserting Events	188
6.4. JUnit Platform Launcher API	193
6.4.1. Discovering Tests	193

6.4.2. Executing Tests	195
6.4.3. Registering a TestEngine	195
6.4.4. Registering a PostDiscoveryFilter	196
6.4.5. Registering a LauncherSessionListener	196
Tool Support	196
Example Usage	196
6.4.6. Registering a LauncherInterceptor	199
6.4.7. Registering a LauncherDiscoveryListener	200
6.4.8. Registering a TestExecutionListener	200
6.4.9. Configuring a TestExecutionListener	201
6.4.10. Deactivating a TestExecutionListener	201
Pattern Matching Syntax	201
6.4.11. Configuring the Launcher	201
6.4.12. Dry-Run Mode	202
6.5. Test Engines	202
6.5.1. JUnit Test Engines	202
6.5.2. Custom Test Engines	203
6.5.3. Registering a TestEngine	203
6.5.4. Requirements	204
Mandatory requirements	204
Enhanced compatibility	204
7. API Evolution	204
7.1. API Version and Status	205
7.2. Experimental APIs	205
7.3. Deprecated APIs	216
7.4. @API Tooling Support	218
8. Contributors	218
9. Release Notes	218
10. Appendix	218
10.1. Reproducible Builds	218
10.2. Dependency Metadata	219
10.2.1. JUnit Platform	219
10.2.2. JUnit Jupiter	220
10.2.3. JUnit Vintage	221
10.2.4. Bill of Materials (BOM)	221
10.2.5. Dependencies	221
10.3. Dependency Diagram	222

1. Overview

The goal of this document is to provide comprehensive reference documentation for programmers writing tests, extension authors, and engine authors as well as build tool and IDE vendors.

1.1. What is JUnit 5?

Unlike previous versions of JUnit, JUnit 5 is composed of several different modules from three different sub-projects.

JUnit 5 = JUnit Platform + JUnit Jupiter + JUnit Vintage

The **JUnit Platform** serves as a foundation for [launching testing frameworks](#) on the JVM. It also defines the [TestEngine](#) API for developing a testing framework that runs on the platform. Furthermore, the platform provides a [Console Launcher](#) to launch the platform from the command line and the [JUnit Platform Suite Engine](#) for running a custom test suite using one or more test engines on the platform. First-class support for the JUnit Platform also exists in popular IDEs (see [IntelliJ IDEA](#), [Eclipse](#), [NetBeans](#), and [Visual Studio Code](#)) and build tools (see [Gradle](#), [Maven](#), and [Ant](#)).

JUnit Jupiter is the combination of the [programming model](#) and [extension model](#) for writing tests and extensions in JUnit 5. The Jupiter sub-project provides a [TestEngine](#) for running Jupiter based tests on the platform.

JUnit Vintage provides a [TestEngine](#) for running JUnit 3 and JUnit 4 based tests on the platform. It requires JUnit 4.12 or later to be present on the class path or module path.

1.2. Supported Java Versions

JUnit 5 requires Java 8 (or higher) at runtime. However, you can still test code that has been compiled with previous versions of the JDK.

1.3. Getting Help

Ask JUnit 5 related questions on [Stack Overflow](#) or chat with the community on [Gitter](#).

1.4. Getting Started

1.4.1. Downloading JUnit Artifacts

To find out what artifacts are available for download and inclusion in your project, refer to [Dependency Metadata](#). To set up dependency management for your build, refer to [Build Support](#) and the [Example Projects](#).

1.4.2. JUnit 5 Features

To find out what features are available in JUnit 5 and how to use them, read the corresponding

sections of this User Guide, organized by topic.

- [Writing Tests in JUnit Jupiter](#)
- [Migrating from JUnit 4 to JUnit Jupiter](#)
- [Running Tests](#)
- [Extension Model for JUnit Jupiter](#)
- [Advanced Topics](#)
 - [JUnit Platform Launcher API](#)
 - [JUnit Platform Test Kit](#)

1.4.3. Example Projects

To see complete, working examples of projects that you can copy and experiment with, the [junit5-samples](#) repository is a good place to start. The [junit5-samples](#) repository hosts a collection of sample projects based on JUnit Jupiter, JUnit Vintage, and other testing frameworks. You'll find appropriate build scripts (e.g., [build.gradle](#), [pom.xml](#), etc.) in the example projects. The links below highlight some of the combinations you can choose from.

- For Gradle and Java, check out the [junit5-jupiter-starter-gradle](#) project.
- For Gradle and Kotlin, check out the [junit5-jupiter-starter-gradle-kotlin](#) project.
- For Gradle and Groovy, check out the [junit5-jupiter-starter-gradle-groovy](#) project.
- For Maven, check out the [junit5-jupiter-starter-maven](#) project.
- For Ant, check out the [junit5-jupiter-starter-ant](#) project.

2. Writing Tests

The following example provides a glimpse at the minimum requirements for writing a test in JUnit Jupiter. Subsequent sections of this chapter will provide further details on all available features.

A first test case

```
import static org.junit.jupiter.api.Assertions.assertEquals;

import example.util.Calculator;

import org.junit.jupiter.api.Test;

class MyFirstJUnitJupiterTests {

    private final Calculator calculator = new Calculator();

    @Test
    void addition() {
        assertEquals(2, calculator.add(1, 1));
    }
}
```



```
}
```

2.1. Annotations

JUnit Jupiter supports the following annotations for configuring tests and extending the framework.

Unless otherwise stated, all core annotations are located in the `org.junit.jupiter.api` package in the `junit-jupiter-api` module.

Annotation	Description
<code>@Test</code>	Denotes that a method is a test method. Unlike JUnit 4's <code>@Test</code> annotation, this annotation does not declare any attributes, since test extensions in JUnit Jupiter operate based on their own dedicated annotations. Such methods are inherited unless they are overridden.
<code>@ParameterizedTest</code>	Denotes that a method is a parameterized test . Such methods are inherited unless they are overridden.
<code>@RepeatedTest</code>	Denotes that a method is a test template for a repeated test . Such methods are inherited unless they are overridden.
<code>@TestFactory</code>	Denotes that a method is a test factory for dynamic tests . Such methods are inherited unless they are overridden.
<code>@TestTemplate</code>	Denotes that a method is a template for test cases designed to be invoked multiple times depending on the number of invocation contexts returned by the registered providers . Such methods are inherited unless they are overridden.
<code>@TestClassOrder</code>	Used to configure the test class execution order for <code>@Nested</code> test classes in the annotated test class. Such annotations are inherited.
<code>@TestMethodOrder</code>	Used to configure the test method execution order for the annotated test class; similar to JUnit 4's <code>@FixMethodOrder</code> . Such annotations are inherited.
<code>@TestInstance</code>	Used to configure the test instance lifecycle for the annotated test class. Such annotations are inherited.
<code>@DisplayName</code>	Declares a custom display name for the test class or test method. Such annotations are not inherited.
<code>@DisplayNameGenerator</code>	Declares a custom display name generator for the test class. Such annotations are inherited.
<code>@BeforeEach</code>	Denotes that the annotated method should be executed <i>before each</i> <code>@Test</code> , <code>@RepeatedTest</code> , <code>@ParameterizedTest</code> , or <code>@TestFactory</code> method in the current class; analogous to JUnit 4's <code>@Before</code> . Such methods are inherited unless they are overridden.

Annotation	Description
<code>@AfterEach</code>	Denotes that the annotated method should be executed <i>after each</i> <code>@Test</code> , <code>@RepeatedTest</code> , <code>@ParameterizedTest</code> , or <code>@TestFactory</code> method in the current class; analogous to JUnit 4's <code>@After</code> . Such methods are inherited unless they are overridden.
<code>@BeforeAll</code>	Denotes that the annotated method should be executed <i>before all</i> <code>@Test</code> , <code>@RepeatedTest</code> , <code>@ParameterizedTest</code> , and <code>@TestFactory</code> methods in the current class; analogous to JUnit 4's <code>@BeforeClass</code> . Such methods are inherited unless they are overridden and must be <code>static</code> unless the "per-class" <code>test instance lifecycle</code> is used.
<code>@AfterAll</code>	Denotes that the annotated method should be executed <i>after all</i> <code>@Test</code> , <code>@RepeatedTest</code> , <code>@ParameterizedTest</code> , and <code>@TestFactory</code> methods in the current class; analogous to JUnit 4's <code>@AfterClass</code> . Such methods are inherited unless they are overridden and must be <code>static</code> unless the "per-class" <code>test instance lifecycle</code> is used.
<code>@Nested</code>	Denotes that the annotated class is a non-static <code>nested test class</code> . On Java 8 through Java 15, <code>@BeforeAll</code> and <code>@AfterAll</code> methods cannot be used directly in a <code>@Nested</code> test class unless the "per-class" <code>test instance lifecycle</code> is used. Beginning with Java 16, <code>@BeforeAll</code> and <code>@AfterAll</code> methods can be declared as <code>static</code> in a <code>@Nested</code> test class with either test instance lifecycle mode. Such annotations are not inherited.
<code>@Tag</code>	Used to declare <code>tags for filtering tests</code> , either at the class or method level; analogous to test groups in TestNG or Categories in JUnit 4. Such annotations are inherited at the class level but not at the method level.
<code>@Disabled</code>	Used to <code>disable</code> a test class or test method; analogous to JUnit 4's <code>@Ignore</code> . Such annotations are not inherited.
<code>@AutoClose</code>	Denotes that the annotated field represents a resource that will be <code>automatically closed</code> after test execution.
<code>@Timeout</code>	Used to fail a test, test factory, test template, or lifecycle method if its execution exceeds a given duration. Such annotations are inherited.
<code>@TempDir</code>	Used to supply a <code>temporary directory</code> via field injection or parameter injection in a test class constructor, lifecycle method, or test method; located in the <code>org.junit.jupiter.api.io</code> package. Such fields are inherited.
<code>@ExtendWith</code>	Used to <code>register extensions declaratively</code> . Such annotations are inherited.
<code>@RegisterExtension</code>	Used to <code>register extensions programmatically</code> via fields. Such fields are inherited.



Some annotations may currently be *experimental*. Consult the table in [Experimental APIs](#) for details.

2.1.1. Meta-Annotations and Composed Annotations

JUnit Jupiter annotations can be used as *meta-annotations*. That means that you can define your

own *composed annotation* that will automatically *inherit* the semantics of its meta-annotations.

For example, instead of copying and pasting `@Tag("fast")` throughout your code base (see [Tagging and Filtering](#)), you can create a custom *composed annotation* named `@Fast` as follows. `@Fast` can then be used as a drop-in replacement for `@Tag("fast")`.

```
import java.lang.annotation.ElementType;
import java.lang.annotation.Retention;
import java.lang.annotation.RetentionPolicy;
import java.lang.annotation.Target;

import org.junit.jupiter.api.Tag;

@Target({ ElementType.TYPE, ElementType.METHOD })
@Retention(RetentionPolicy.RUNTIME)
@Tag("fast")
public @interface Fast {
}
```

The following `@Test` method demonstrates usage of the `@Fast` annotation.

```
@Fast
@Test
void myFastTest() {
    // ...
}
```

You can even take that one step further by introducing a custom `@FastTest` annotation that can be used as a drop-in replacement for `@Tag("fast")` and `@Test`.

```
import java.lang.annotation.ElementType;
import java.lang.annotation.Retention;
import java.lang.annotation.RetentionPolicy;
import java.lang.annotation.Target;

import org.junit.jupiter.api.Tag;
import org.junit.jupiter.api.Test;

@Target(ElementType.METHOD)
@Retention(RetentionPolicy.RUNTIME)
@Tag("fast")
@Test
public @interface FastTest {
}
```

JUnit automatically recognizes the following as a `@Test` method that is tagged with "fast".

```
@FastTest
void myFastTest() {
    // ...
}
```

2.2. Definitions

Platform Concepts

Container

a node in the test tree that contains other containers or tests as its children (e.g. a *test class*).

Test

a node in the test tree that verifies expected behavior when executed (e.g. a `@Test` method).

Jupiter Concepts

Lifecycle Method

any method that is directly annotated or meta-annotated with `@BeforeAll`, `@AfterAll`, `@BeforeEach`, or `@AfterEach`.

Test Class

any top-level class, `static` member class, or `@Nested class` that contains at least one *test method*, i.e. a *container*. Test classes must not be `abstract` and must have a single constructor. Java `record` classes are supported as well.

Test Method

any instance method that is directly annotated or meta-annotated with `@Test`, `@RepeatedTest`, `@ParameterizedTest`, `@TestFactory`, or `@TestTemplate`. With the exception of `@Test`, these create a *container* in the test tree that groups *tests* or, potentially (for `@TestFactory`), other *containers*.

2.3. Test Classes and Methods

Test methods and lifecycle methods may be declared locally within the current test class, inherited from superclasses, or inherited from interfaces (see [Test Interfaces and Default Methods](#)). In addition, test methods and lifecycle methods must not be `abstract` and must not return a value (except `@TestFactory` methods which are required to return a value).



Class and method visibility

Test classes, test methods, and lifecycle methods are not required to be `public`, but they must *not* be `private`.

It is generally recommended to omit the `public` modifier for test classes, test methods, and lifecycle methods unless there is a technical reason for doing so – for example, when a test class is extended by a test class in another package. Another technical reason for making classes and methods `public` is to simplify testing on the module path when using the Java Module System.

Field and method inheritance

Fields in test classes are inherited. For example, a `@TempDir` field from a superclass will always be applied in a subclass.



Test methods and lifecycle methods are inherited unless they are overridden according to the visibility rules of the Java language. For example, a `@Test` method from a superclass will always be applied in a subclass unless the subclass explicitly overrides the method. Similarly, if a package-private `@Test` method is declared in a superclass that resides in a different package than the subclass, that `@Test` method will always be applied in the subclass since the subclass cannot override a package-private method from a superclass in a different package.

See also: [Field and Method Search Semantics](#)

The following test class demonstrates the use of `@Test` methods and all supported lifecycle methods. For further information on runtime semantics, see [Test Execution Order](#) and [Wrapping Behavior of Callbacks](#).

A standard test class

```
import static org.junit.jupiter.api.Assertions.fail;
import static org.junit.jupiter.api.Assumptions.assumeTrue;

import org.junit.jupiter.api.AfterAll;
import org.junit.jupiter.api.AfterEach;
import org.junit.jupiter.api.BeforeAll;
import org.junit.jupiter.api.BeforeEach;
import org.junit.jupiter.api.Disabled;
import org.junit.jupiter.api.Test;

class StandardTests {

    @BeforeAll
    static void initAll() {
    }

    @BeforeEach
    void init() {
    }

    @Test
    void succeedingTest() {
    }
}
```

```

@Test
void failingTest() {
    fail("a failing test");
}

@Test
@Disabled("for demonstration purposes")
void skippedTest() {
    // not executed
}

@Test
void abortedTest() {
    assertTrue("abc".contains("Z"));
    fail("test should have been aborted");
}

@AfterEach
void tearDown() {
}

@AfterAll
static void tearDownAll() {
}
}

```

It is also possible to use Java `record` classes as test classes as illustrated by the following example.

A test class written as a Java record

```

import static org.junit.jupiter.api.Assertions.assertEquals;

import example.util.Calculator;

import org.junit.jupiter.api.Test;

record MyFirstJUnitJupiterRecordTests() {

    @Test
    void addition() {
        assertEquals(2, new Calculator().add(1, 1));
    }
}

```

2.4. Display Names

Test classes and test methods can declare custom display names via `@DisplayName` — with spaces,

special characters, and even emojis — that will be displayed in test reports and by test runners and IDEs.

```
import org.junit.jupiter.api.DisplayName;
import org.junit.jupiter.api.Test;

@DisplayName("A special test case")
class DisplayNameDemo {

    @Test
    @DisplayName("Custom test name containing spaces")
    void testWithDisplayNameContainingSpaces() {
    }

    @Test
    @DisplayName("😊°□°😊 ")
    void testWithDisplayNameContainingSpecialCharacters() {
    }

    @Test
    @DisplayName("🤖")
    void testWithDisplayNameContainingEmoji() {
    }
}
```

2.4.1. Display Name Generators

JUnit Jupiter supports custom display name generators that can be configured via the `@DisplayNameGeneration` annotation. Values provided via `@DisplayName` annotations always take precedence over display names generated by a `DisplayNameGenerator`.

Generators can be created by implementing `DisplayNameGenerator`. Here are some default ones available in Jupiter:

DisplayNameGenerator	Behavior
Standard	Matches the standard display name generation behavior in place since JUnit Jupiter 5.0 was released.
Simple	Removes trailing parentheses for methods with no parameters.
ReplaceUnderscores	Replaces underscores with spaces.
IndicativeSentences	Generates complete sentences by concatenating the names of the test and the enclosing classes.

Note that for `IndicativeSentences`, you can customize the separator and the underlying generator by using `@IndicativeSentencesGeneration` as shown in the following example.

```

import org.junit.jupiter.api.DisplayName;
import org.junit.jupiter.api.DisplayNameGeneration;
import org.junit.jupiter.api.DisplayNameGenerator;
import org.junit.jupiter.api.DisplayNameGenerator.ReplaceUnderscores;
import org.junit.jupiter.api.IndicativeSentencesGeneration;
import org.junit.jupiter.api.Nested;
import org.junit.jupiter.api.Test;
import org.junit.jupiter.params.ParameterizedTest;
import org.junit.jupiter.params.provider.ValueSource;

class DisplayNameGeneratorDemo {

    @Nested
    @DisplayNameGeneration(DisplayNameGenerator.ReplaceUnderscores.class)
    class A_year_is_not_supported {

        @Test
        void if_it_is_zero() {
        }

        @DisplayName("A negative value for year is not supported by the leap year
computation.")
        @ParameterizedTest(name = "For example, year {0} is not supported.")
        @ValueSource(ints = { -1, -4 })
        void if_it_is_negative(int year) {
        }

    }

    @Nested
    @IndicativeSentencesGeneration(separator = " -> ", generator = ReplaceUnderscores
.class)
    class A_year_is_a_leap_year {

        @Test
        void if_it_is_divisible_by_4_but_not_by_100() {
        }

        @ParameterizedTest(name = "Year {0} is a leap year.")
        @ValueSource(ints = { 2016, 2020, 2048 })
        void if_it_is_one_of_the_following_years(int year) {
        }

    }

}

```

```

+-- DisplayNameGeneratorDemo [OK]
+-- A year is not supported [OK]

```



```

| +-- A negative value for year is not supported by the leap year computation. [OK]
| | +-- For example, year -1 is not supported. [OK]
| | '-- For example, year -4 is not supported. [OK]
| '-- if it is zero() [OK]
'-- A year is a leap year [OK]
  +-- A year is a leap year -> if it is divisible by 4 but not by 100. [OK]
  '-- A year is a leap year -> if it is one of the following years. [OK]
    +-- Year 2016 is a leap year. [OK]
    +-- Year 2020 is a leap year. [OK]
    '-- Year 2048 is a leap year. [OK]

```

2.4.2. Setting the Default Display Name Generator

You can use the `junit.jupiter.displayname.generator.default` configuration parameter to specify the fully qualified class name of the `DisplayNameGenerator` you would like to use by default. Just like for display name generators configured via the `@DisplayNameGeneration` annotation, the supplied class has to implement the `DisplayNameGenerator` interface. The default display name generator will be used for all tests unless the `@DisplayNameGeneration` annotation is present on an enclosing test class or test interface. Values provided via `@DisplayName` annotations always take precedence over display names generated by a `DisplayNameGenerator`.

For example, to use the `ReplaceUnderscores` display name generator by default, you should set the configuration parameter to the corresponding fully qualified class name (e.g., in `src/test/resources/junit-platform.properties`):

```

junit.jupiter.displayname.generator.default = \
    org.junit.jupiter.api.DisplayNameGenerator$ReplaceUnderscores

```

Similarly, you can specify the fully qualified name of any custom class that implements `DisplayNameGenerator`.

In summary, the display name for a test class or method is determined according to the following precedence rules:

1. value of the `@DisplayName` annotation, if present
2. by calling the `DisplayNameGenerator` specified in the `@DisplayNameGeneration` annotation, if present
3. by calling the default `DisplayNameGenerator` configured via the configuration parameter, if present
4. by calling `org.junit.jupiter.api.DisplayNameGenerator.Standard`

2.5. Assertions

JUnit Jupiter comes with many of the assertion methods that JUnit 4 has and adds a few that lend themselves well to being used with Java 8 lambdas. All JUnit Jupiter assertions are `static` methods in the `org.junit.jupiter.api.Assertions` class.

Assertion methods optionally accept the assertion message as their third parameter, which can be either a `String` or a `Supplier<String>`.

When using a `Supplier<String>` (e.g., a lambda expression), the message is evaluated lazily. This can provide a performance benefit, especially if message construction is complex or time-consuming, as it is only evaluated when the assertion fails.

```
import static java.time.Duration.ofMillis;
import static java.time.Duration.ofMinutes;
import static org.junit.jupiter.api.Assertions.assertAll;
import static org.junit.jupiter.api.Assertions.assertEquals;
import static org.junit.jupiter.api.Assertions.assertNotNull;
import static org.junit.jupiter.api.Assertions.assertThrows;
import static org.junit.jupiter.api.Assertions.assertTimeout;
import static org.junit.jupiter.api.Assertions.assertTimeoutPreemptively;
import static org.junit.jupiter.api.Assertions.assertTrue;

import java.util.concurrent.CountDownLatch;

import example.domain.Person;
import example.util.Calculator;

import org.junit.jupiter.api.Tag;
import org.junit.jupiter.api.Test;

class AssertionsDemo {

    private final Calculator calculator = new Calculator();

    private final Person person = new Person("Jane", "Doe");

    @Test
    void standardAssertions() {
        assertEquals(2, calculator.add(1, 1));
        assertEquals(4, calculator.multiply(2, 2),
            "The optional failure message is now the last parameter");

        // Lazily evaluates generateFailureMessage('a','b').
        assertTrue('a' < 'b', () -> generateFailureMessage('a','b'));
    }

    @Test
    void groupedAssertions() {
        // In a grouped assertion all assertions are executed, and all
        // failures will be reported together.
        assertAll("person",
            () -> assertEquals("Jane", person.getFirstName()),
            () -> assertEquals("Doe", person.getLastName())
        );
    }
}
```

```

@Test
void dependentAssertions() {
    // Within a code block, if an assertion fails the
    // subsequent code in the same block will be skipped.
    assertAll("properties",
        () -> {
            String firstName = person.getFirstName();
            assertNotNull(firstName);

            // Executed only if the previous assertion is valid.
            assertAll("first name",
                () -> assertTrue(firstName.startsWith("J")),
                () -> assertTrue(firstName.endsWith("e"))
            );
        },
        () -> {
            // Grouped assertion, so processed independently
            // of results of first name assertions.
            String lastName = person.getLastName();
            assertNotNull(lastName);

            // Executed only if the previous assertion is valid.
            assertAll("last name",
                () -> assertTrue(lastName.startsWith("D")),
                () -> assertTrue(lastName.endsWith("e"))
            );
        }
    );
}

@Test
void exceptionTesting() {
    Exception exception = assertThrows(ArithmeticException.class, () ->
        calculator.divide(1, 0));
    assertEquals("/ by zero", exception.getMessage());
}

@Test
void timeoutNotExceeded() {
    // The following assertion succeeds.
    assertTimeout(ofMinutes(2), () -> {
        // Perform task that takes less than 2 minutes.
    });
}

@Test
void timeoutNotExceededWithResult() {
    // The following assertion succeeds, and returns the supplied object.
    String actualResult = assertTimeout(ofMinutes(2), () -> {
        return "a result";
    });
}

```

```

    });
    assertEquals("a result", actualResult);
}

@Test
void timeoutNotExceededWithMethod() {
    // The following assertion invokes a method reference and returns an object.
    String actualGreeting = assertTimeout(ofMinutes(2), AssertionsDemo::greeting);
    assertEquals("Hello, World!", actualGreeting);
}

@Test
void timeoutExceeded() {
    // The following assertion fails with an error message similar to:
    // execution exceeded timeout of 10 ms by 91 ms
    assertTimeout(ofMillis(10), () -> {
        // Simulate task that takes more than 10 ms.
        Thread.sleep(100);
    });
}

@Test
void timeoutExceededWithPreemptiveTermination() {
    // The following assertion fails with an error message similar to:
    // execution timed out after 10 ms
    assertTimeoutPreemptively(ofMillis(10), () -> {
        // Simulate task that takes more than 10 ms.
        new CountdownLatch(1).await();
    });
}

private static String greeting() {
    return "Hello, World!";
}

private static String generateFailureMessage(char a, char b) {
    return "Assertion messages can be lazily evaluated -- "
        + "to avoid constructing complex messages unnecessarily." + (a < b);
}
}

```



Preemptive Timeouts with `assertTimeoutPreemptively()`

The various `assertTimeoutPreemptively()` methods in the `Assertions` class execute the provided `executable` or `supplier` in a different thread than that of the calling code. This behavior can lead to undesirable side effects if the code that is executed within the `executable` or `supplier` relies on `java.lang.ThreadLocal` storage.

One common example of this is the transactional testing support in the Spring Framework. Specifically, Spring's testing support binds transaction state to the current thread (via a `ThreadLocal`) before a test method is invoked. Consequently, if

an `executable` or `supplier` provided to `assertTimeoutPreemptively()` invokes Spring-managed components that participate in transactions, any actions taken by those components will not be rolled back with the test-managed transaction. On the contrary, such actions will be committed to the persistent store (e.g., relational database) even though the test-managed transaction is rolled back.

Similar side effects may be encountered with other frameworks that rely on `ThreadLocal` storage.

2.5.1. Kotlin Assertion Support

JUnit Jupiter also comes with a few assertion methods that lend themselves well to being used in `Kotlin`. All JUnit Jupiter Kotlin assertions are top-level functions in the `org.junit.jupiter.api` package.

```
import example.domain.Person
import example.util.Calculator
import org.junit.jupiter.api.Assertions.assertEquals
import org.junit.jupiter.api.Assertions.assertTrue
import org.junit.jupiter.api.Tag
import org.junit.jupiter.api.Test
import org.junit.jupiter.api.assertAll
import org.junit.jupiter.api.assertDoesNotThrow
import org.junit.jupiter.api.assertInstanceOf
import org.junit.jupiter.api.assertNotNull
import org.junit.jupiter.api.assertThrows
import org.junit.jupiter.api.assertTimeout
import org.junit.jupiter.api.assertTimeoutPreemptively
import java.time.Duration

class KotlinAssertionsDemo {
    private val person = Person("Jane", "Doe")
    private val people = setOf(person, Person("John", "Doe"))

    @Test
    fun `exception absence testing`() {
        val calculator = Calculator()
        val result =
            assertDoesNotThrow("Should not throw an exception") {
                calculator.divide(0, 1)
            }
        assertEquals(0, result)
    }

    @Test
    fun `expected exception testing`() {
        val calculator = Calculator()
        val exception =
            assertThrows<ArithmeticException> ("Should throw an exception") {
                calculator.divide(1, 0)
            }
    }
}
```

```

    }
    assertEquals("/ by zero", exception.message)
}

@Test
fun `grouped assertions`() {
    assertAll(
        "Person properties",
        { assertEquals("Jane", person.firstName) },
        { assertEquals("Doe", person.lastName) }
    )
}

@Test
fun `grouped assertions from a stream`() {
    assertAll(
        "People with first name starting with J",
        people
            .stream()
            .map {
                // This mapping returns Stream<() -> Unit>
                { assertTrue(it.firstName.startsWith("J")) }
            }
    )
}

@Test
fun `grouped assertions from a collection`() {
    assertAll(
        "People with last name of Doe",
        people.map { { assertEquals("Doe", it.lastName) } }
    )
}

@Test
fun `timeout not exceeded testing`() {
    val fibonacciCalculator = FibonacciCalculator()
    val result =
        assertTimeout(Duration.ofMillis(1000)) {
            fibonacciCalculator.fib(14)
        }
    assertEquals(377, result)
}

@Test
fun `timeout exceeded with preemptive termination`() {
    // The following assertion fails with an error message similar to:
    // execution timed out after 10 ms
    assertTimeoutPreemptively(Duration.ofMillis(10)) {
        // Simulate task that takes more than 10 ms.
        Thread.sleep(100)
    }
}

```

```

    }
}

@Test
fun `assertNotNull with a smart cast`() {
    val nullablePerson: Person? = person

    assertNotNull(nullablePerson)

    // The compiler smart casts nullablePerson to a non-nullable object.
    // The safe call operator (?.) isn't required.
    assertEquals(person.firstName, nullablePerson.firstName)
    assertEquals(person.lastName, nullablePerson.lastName)
}

@Test
fun `assertInstanceOf with a smart cast`() {
    val maybePerson: Any = person

    assertNotNull<Person>(maybePerson)

    // The compiler smart casts maybePerson to a Person object,
    // allowing to access the Person properties.
    assertEquals(person.firstName, maybePerson.firstName)
    assertEquals(person.lastName, maybePerson.lastName)
}
}

```

2.5.2. Third-party Assertion Libraries

Even though the assertion facilities provided by JUnit Jupiter are sufficient for many testing scenarios, there are times when more power and additional functionality such as *matchers* are desired or required. In such cases, the JUnit team recommends the use of third-party assertion libraries such as [AssertJ](#), [Hamcrest](#), [Truth](#), etc. Developers are therefore free to use the assertion library of their choice.

For example, the combination of *matchers* and a fluent API can be used to make assertions more descriptive and readable. However, JUnit Jupiter's [org.junit.jupiter.api.Assertions](#) class does not provide an `assertThat()` method like the one found in JUnit 4's [org.junit.Assert](#) class which accepts a Hamcrest *Matcher*. Instead, developers are encouraged to use the built-in support for matchers provided by third-party assertion libraries.

The following example demonstrates how to use the `assertThat()` support from Hamcrest in a JUnit Jupiter test. As long as the Hamcrest library has been added to the classpath, you can statically import methods such as `assertThat()`, `is()`, and `equalTo()` and then use them in tests like in the `assertWithHamcrestMatcher()` method below.

```

import static org.hamcrest.CoreMatchers.equalTo;
import static org.hamcrest.CoreMatchers.is;

```

```

import static org.hamcrest.MatcherAssert.assertThat;

import example.util.Calculator;

import org.junit.jupiter.api.Test;

class HamcrestAssertionsDemo {

    private final Calculator calculator = new Calculator();

    @Test
    void assertWithHamcrestMatcher() {
        assertThat(calculator.subtract(4, 1), is(equalTo(3)));
    }
}

```

Naturally, legacy tests based on the JUnit 4 programming model can continue using `org.junit.Assert#assertThat`.

2.6. Assumptions

Assumptions are typically used whenever it does not make sense to continue execution of a given test — for example, if the test depends on something that does not exist in the current runtime environment.

- When an assumption is valid, the assumption method does not throw an exception, and execution of the test continues as usual.
- When an assumption is invalid, the assumption method throws an exception of type `org.opentest4j.TestAbortedException` to signal that the test should be aborted instead of marked as a failure.

JUnit Jupiter comes with a subset of the *assumption* methods that JUnit 4 provides and adds a few that lend themselves well to being used with Java 8 lambda expressions and method references.

All JUnit Jupiter assumptions are static methods in the `org.junit.jupiter.api.Assumptions` class.

```

import static org.junit.jupiter.api.Assertions.assertEquals;
import static org.junit.jupiter.api.Assumptions.assumeTrue;
import static org.junit.jupiter.api.Assumptions.assumingThat;

import example.util.Calculator;

import org.junit.jupiter.api.Test;

class AssumptionsDemo {

    private final Calculator calculator = new Calculator();

```



```

@Test
void testOnlyOnCiServer() {
    assertTrue("CI".equals(System.getenv("ENV")));
    // remainder of test
}

@Test
void testOnlyOnDeveloperWorkstation() {
    assertTrue("DEV".equals(System.getenv("ENV")),
        () -> "Aborting test: not on developer workstation");
    // remainder of test
}

@Test
void testInAllEnvironments() {
    assumingThat("CI".equals(System.getenv("ENV")),
        () -> {
            // perform these assertions only on the CI server
            assertEquals(2, calculator.divide(4, 2));
        });

    // perform these assertions in all environments
    assertEquals(42, calculator.multiply(6, 7));
}
}

```



It is also possible to use methods from JUnit 4's `org.junit.Assume` class for assumptions. Specifically, JUnit Jupiter supports JUnit 4's `AssumptionViolatedException` to signal that a test should be aborted instead of marked as a failure.

2.7. Exception Handling

JUnit Jupiter provides robust support for handling test exceptions. This includes the built-in mechanisms for managing test failures due to exceptions, the role of exceptions in implementing assertions and assumptions, and how to specifically assert non-throwing conditions in code.

2.7.1. Uncaught Exceptions

In JUnit Jupiter, if an exception is thrown from a test method, a lifecycle method, or an extension and not caught within that test method, lifecycle method, or extension, the framework will mark the test or test class as failed.



Failed assumptions deviate from this general rule.

In contrast to failed assertions, failed assumptions do not result in a test failure; rather, a failed assumption results in a test being aborted.

See [Assumptions](#) for further details and examples.

In the following example, the `failsDueToUncaughtException()` method throws an `ArithmeticException`. Since the exception is not caught within the test method, JUnit Jupiter will mark the test as failed.

```
private final Calculator calculator = new Calculator();

@Test
void failsDueToUncaughtException() {
    // The following throws an ArithmeticException due to division by
    // zero, which causes a test failure.
    calculator.divide(1, 0);
}
```



It's important to note that specifying a `throws` clause in the test method has no effect on the outcome of the test. JUnit Jupiter does not interpret a `throws` clause as an expectation or assertion about what exceptions the test method should throw. A test fails only if an exception is thrown unexpectedly or if an assertion fails.

2.7.2. Failed Assertions

Assertions in JUnit Jupiter are implemented using exceptions. The framework provides a set of assertion methods in the `org.junit.jupiter.api.Assertions` class, which throw `AssertionError` when an assertion fails. This mechanism is a core aspect of how JUnit handles assertion failures as exceptions. See the [Assertions](#) section for further information about JUnit Jupiter's assertion support.



Third-party assertion libraries may choose to throw an `AssertionError` to signal a failed assertion; however, they may also choose to throw different types of exceptions to signal failures. See also: [Third-party Assertion Libraries](#).



JUnit Jupiter itself does not differentiate between failed assertions (`AssertionError`) and other types of exceptions. All uncaught exceptions lead to a test failure. However, Integrated Development Environments (IDEs) and other tools may distinguish between these two types of failures by checking whether the thrown exception is an instance of `AssertionError`.

In the following example, the `failsDueToUncaughtAssertionError()` method throws an `AssertionError`. Since the exception is not caught within the test method, JUnit Jupiter will mark the test as failed.

```
private final Calculator calculator = new Calculator();

@Test
void failsDueToUncaughtAssertionError() {
```

```
// The following incorrect assertion will cause a test failure.
// The expected value should be 2 instead of 99.
assertEquals(99, calculator.add(1, 1));
}
```

2.7.3. Asserting Expected Exceptions

JUnit Jupiter offers specialized assertions for testing that specific exceptions are thrown under expected conditions. The `assertThrows()` and `assertThrowsExactly()` assertions are critical tools for validating that your code responds correctly to error conditions by throwing the appropriate exceptions.

Using `assertThrows()`

The `assertThrows()` method is used to verify that a particular type of exception is thrown during the execution of a provided executable block. It not only checks for the type of the thrown exception but also its subclasses, making it suitable for more generalized exception handling tests. The `assertThrows()` assertion method returns the thrown exception object to allow performing additional assertions on it.

```
@Test
void testExpectedExceptionIsThrown() {
    // The following assertion succeeds because the code under assertion
    // throws the expected IllegalArgumentException.
    // The assertion also returns the thrown exception which can be used for
    // further assertions like asserting the exception message.
    IllegalArgumentException exception =
        assertThrows(IllegalArgumentException.class, () -> {
            throw new IllegalArgumentException("expected message");
        });
    assertEquals("expected message", exception.getMessage());

    // The following assertion also succeeds because the code under assertion
    // throws IllegalArgumentException which is a subclass of RuntimeException.
    assertThrows(RuntimeException.class, () -> {
        throw new IllegalArgumentException("expected message");
    });
}
```

Using `assertThrowsExactly()`

The `assertThrowsExactly()` method is used when you need to assert that the exception thrown is exactly of a specific type, not allowing for subclasses of the expected exception type. This is useful when precise exception handling behavior needs to be validated. Similar to `assertThrows()`, the `assertThrowsExactly()` assertion method also returns the thrown exception object to allow performing additional assertions on it.

```
@Test
```

```

void testExpectedExceptionIsThrown() {
    // The following assertion succeeds because the code under assertion throws
    // IllegalArgumentException which is exactly equal to the expected type.
    // The assertion also returns the thrown exception which can be used for
    // further assertions like asserting the exception message.
    IllegalArgumentException exception =
        assertThrowsExactly(IllegalArgumentException.class, () -> {
            throw new IllegalArgumentException("expected message");
        });
    assertEquals("expected message", exception.getMessage());

    // The following assertion fails because the assertion expects exactly
    // RuntimeException to be thrown, not subclasses of RuntimeException.
    assertThrowsExactly(RuntimeException.class, () -> {
        throw new IllegalArgumentException("expected message");
    });
}

```

2.7.4. Asserting That no Exception is Expected

Although any exception thrown from a test method will cause the test to fail, there are certain use cases where it can be beneficial to explicitly assert that an exception is *not* thrown for a given code block within a test method. The `assertDoesNotThrow()` assertion can be used when you want to verify that a particular piece of code does not throw any exceptions.

```

@Test
void testExceptionIsNotThrown() {
    assertDoesNotThrow(() -> {
        shouldNotThrowException();
    });
}

void shouldNotThrowException() {
}

```



Third-party assertion libraries often provide similar support. For example, AssertJ has `assertThatNoException().isThrownBy(() -> ...)`. See also: [Third-party Assertion Libraries](#).

2.8. Disabling Tests

Entire test classes or individual test methods may be *disabled* via the `@Disabled` annotation, via one of the annotations discussed in [Conditional Test Execution](#), or via a custom `ExecutionCondition`.

When `@Disabled` is applied at the class level, all test methods within that class are automatically disabled as well.

If a test method is disabled via `@Disabled`, that prevents execution of the test method and method-level lifecycle callbacks such as `@BeforeEach` methods, `@AfterEach` methods, and corresponding extension APIs. However, that does not prevent the test class from being instantiated, and it does not prevent the execution of class-level lifecycle callbacks such as `@BeforeAll` methods, `@AfterAll` methods, and corresponding extension APIs.

Here's a `@Disabled` test class.

```
import org.junit.jupiter.api.Disabled;
import org.junit.jupiter.api.Test;

@Disabled("Disabled until bug #99 has been fixed")
class DisabledClassDemo {

    @Test
    void testWillBeSkipped() {
    }

}
```

And here's a test class that contains a `@Disabled` test method.

```
import org.junit.jupiter.api.Disabled;
import org.junit.jupiter.api.Test;

class DisabledTestsDemo {

    @Disabled("Disabled until bug #42 has been resolved")
    @Test
    void testWillBeSkipped() {
    }

    @Test
    void testWillBeExecuted() {
    }

}
```



`@Disabled` may be declared without providing a *reason*; however, the JUnit team recommends that developers provide a short explanation for why a test class or test method has been disabled. Consequently, the above examples both show the use of a reason—for example, `@Disabled("Disabled until bug #42 has been resolved")`. Some development teams even require the presence of issue tracking numbers in the *reason* for automated traceability, etc.



`@Disabled` is not `@Inherited`. Consequently, if you wish to disable a class whose superclass is `@Disabled`, you must redeclare `@Disabled` on the subclass.

2.9. Conditional Test Execution

The `ExecutionCondition` extension API in JUnit Jupiter allows developers to either *enable* or *disable* a test class or test method based on certain conditions *programmatically*. The simplest example of such a condition is the built-in `DisabledCondition` which supports the `@Disabled` annotation (see [Disabling Tests](#)).

In addition to `@Disabled`, JUnit Jupiter also supports several other annotation-based conditions in the `org.junit.jupiter.api.condition` package that allow developers to enable or disable test classes and test methods *declaratively*. If you wish to provide details about why they might be disabled, every annotation associated with these built-in conditions has a `disabledReason` attribute available for that purpose.

When multiple `ExecutionCondition` extensions are registered, a test class or test method is disabled as soon as one of the conditions returns *disabled*. If a test class is disabled, all test methods within that class are automatically disabled as well. If a test method is disabled, that prevents execution of the test method and method-level lifecycle callbacks such as `@BeforeEach` methods, `@AfterEach` methods, and corresponding extension APIs. However, that does not prevent the test class from being instantiated, and it does not prevent the execution of class-level lifecycle callbacks such as `@BeforeAll` methods, `@AfterAll` methods, and corresponding extension APIs.

See `ExecutionCondition` and the following sections for details.

Composed Annotations



Note that any of the *conditional* annotations listed in the following sections may also be used as a meta-annotation in order to create a custom *composed annotation*. For example, the `@TestOnMac` annotation in the [@EnabledOnOs demo](#) shows how you can combine `@Test` and `@EnabledOnOs` in a single, reusable annotation.



Conditional annotations in JUnit Jupiter are not `@Inherited`. Consequently, if you wish to apply the same semantics to subclasses, each conditional annotation must be redeclared on each subclass.



Unless otherwise stated, each of the *conditional* annotations listed in the following sections can only be declared once on a given test interface, test class, or test method. If a conditional annotation is directly present, indirectly present, or meta-present multiple times on a given element, only the first such annotation discovered by JUnit will be used; any additional declarations will be silently ignored. Note, however, that each conditional annotation may be used in conjunction with other conditional annotations in the `org.junit.jupiter.api.condition` package.

2.9.1. Operating System and Architecture Conditions

A container or test may be enabled or disabled on a particular operating system, architecture, or combination of both via the `@EnabledOnOs` and `@DisabledOnOs` annotations.

Conditional execution based on operating system

```
@Test
@EnabledOnOs(MAC)
void onlyOnMacOs() {
    // ...
}

@TestOnMac
void testOnMac() {
    // ...
}

@Test
@EnabledOnOs({ LINUX, MAC })
void onLinuxOrMac() {
    // ...
}

@Test
@DisabledOnOs(WINDOWS)
void notOnWindows() {
    // ...
}

@Target(ElementType.METHOD)
@Retention(RetentionPolicy.RUNTIME)
@Test
@EnabledOnOs(MAC)
@interface TestOnMac {
}
```

Conditional execution based on architecture

```
@Test
@EnabledOnOs(architectures = "aarch64")
void onAarch64() {
    // ...
}

@Test
@DisabledOnOs(architectures = "x86_64")
void notOnX86_64() {
    // ...
}

@Test
@EnabledOnOs(value = MAC, architectures = "aarch64")
void onNewMacs() {
    // ...
}
```

```

}

@Test
@DisabledOnOs(value = MAC, architectures = "aarch64")
void notOnNewMacs() {
    // ...
}

```

2.9.2. Java Runtime Environment Conditions

A container or test may be enabled or disabled on particular versions of the Java Runtime Environment (JRE) via the `@EnabledOnJre` and `@DisabledOnJre` annotations or on a particular range of versions of the JRE via the `@EnabledForJreRange` and `@DisabledForJreRange` annotations. The range effectively defaults to `JRE.JAVA_8` as the lower bound and `JRE.OTHER` as the upper bound, which allows usage of half open ranges.

The following listing demonstrates the use of these annotations with predefined `JRE` enum constants.

```

@Test
@EnabledOnJre(JAVA_17)
void onlyOnJava17() {
    // ...
}

@Test
@EnabledOnJre({ JAVA_17, JAVA_21 })
void onJava17And21() {
    // ...
}

@Test
@EnabledForJreRange(min = JAVA_9, max = JAVA_11)
void fromJava9To11() {
    // ...
}

@Test
@EnabledForJreRange(min = JAVA_9)
void onJava9AndHigher() {
    // ...
}

@Test
@EnabledForJreRange(max = JAVA_11)
void fromJava8To11() {
    // ...
}

```



```

@Test
@DisabledOnJre(JAVA_9)
void notOnJava9() {
    // ...
}

@Test
@DisabledForJreRange(min = JAVA_9, max = JAVA_11)
void notFromJava9To11() {
    // ...
}

@Test
@DisabledForJreRange(min = JAVA_9)
void notOnJava9AndHigher() {
    // ...
}

@Test
@DisabledForJreRange(max = JAVA_11)
void notFromJava8To11() {
    // ...
}

```

Since the enum constants defined in [JRE](#) are static for any given JUnit release, you might find that you need to configure a Java version that is not supported by the [JRE](#) enum. For example, as of JUnit Jupiter 5.12 the [JRE](#) enum defines [JAVA_25](#) as the highest supported Java version. However, you may wish to run your tests against later versions of Java. To support such use cases, you can specify arbitrary Java versions via the [versions](#) attributes in [@EnabledOnJre](#) and [@DisabledOnJre](#) and via the [minVersion](#) and [maxVersion](#) attributes in [@EnabledForJreRange](#) and [@DisabledForJreRange](#).

The following listing demonstrates the use of these annotations with arbitrary Java versions.

```

@Test
@EnabledOnJre(versions = 26)
void onlyOnJava26() {
    // ...
}

@Test
@EnabledOnJre(versions = { 25, 26 })
// Can also be expressed as follows.
// @EnabledOnJre(value = JAVA_25, versions = 26)
void onJava25And26() {
    // ...
}

@Test
@EnabledForJreRange(minVersion = 26)
void onJava26AndHigher() {

```

```

    // ...
}

@Test
@EnabledForJreRange(minVersion = 25, maxVersion = 27)
// Can also be expressed as follows.
// @EnabledForJreRange(min = JAVA_25, maxVersion = 27)
void fromJava25To27() {
    // ...
}

@Test
@DisabledOnJre(versions = 26)
void notOnJava26() {
    // ...
}

@Test
@DisabledOnJre(versions = { 25, 26 })
// Can also be expressed as follows.
// @DisabledOnJre(value = JAVA_25, versions = 26)
void notOnJava25And26() {
    // ...
}

@Test
@DisabledForJreRange(minVersion = 26)
void notOnJava26AndHigher() {
    // ...
}

@Test
@DisabledForJreRange(minVersion = 25, maxVersion = 27)
// Can also be expressed as follows.
// @DisabledForJreRange(min = JAVA_25, maxVersion = 27)
void notFromJava25To27() {
    // ...
}
}

```

2.9.3. Native Image Conditions

A container or test may be enabled or disabled within a [GraalVM native image](#) via the [@EnabledInNativeImage](#) and [@DisabledInNativeImage](#) annotations. These annotations are typically used when running tests within a native image using the Gradle and Maven plug-ins from the GraalVM [Native Build Tools](#) project.

```

@Test
@EnabledInNativeImage
void onlyWithinNativeImage() {

```

```

    // ...
}

@Test
@DisabledInNativeImage
void neverWithinNativeImage() {
    // ...
}

```

2.9.4. System Property Conditions

A container or test may be enabled or disabled based on the value of the `named` JVM system property via the `@EnabledIfSystemProperty` and `@DisabledIfSystemProperty` annotations. The value supplied via the `matches` attribute will be interpreted as a regular expression.

```

@Test
@EnabledIfSystemProperty(named = "os.arch", matches = ".*64.*")
void onlyOn64BitArchitectures() {
    // ...
}

@Test
@DisabledIfSystemProperty(named = "ci-server", matches = "true")
void notOnCiServer() {
    // ...
}

```



As of JUnit Jupiter 5.6, `@EnabledIfSystemProperty` and `@DisabledIfSystemProperty` are *repeatable annotations*. Consequently, these annotations may be declared multiple times on a test interface, test class, or test method. Specifically, these annotations will be found if they are directly present, indirectly present, or meta-present on a given element.

2.9.5. Environment Variable Conditions

A container or test may be enabled or disabled based on the value of the `named` environment variable from the underlying operating system via the `@EnabledIfEnvironmentVariable` and `@DisabledIfEnvironmentVariable` annotations. The value supplied via the `matches` attribute will be interpreted as a regular expression.

```

@Test
@EnabledIfEnvironmentVariable(named = "ENV", matches = "staging-server")
void onlyOnStagingServer() {
    // ...
}

@Test

```

```
@DisabledIfEnvironmentVariable(named = "ENV", matches = ".*development.*")
void notOnDeveloperWorkstation() {
    // ...
}
```



As of JUnit Jupiter 5.6, `@EnabledIfEnvironmentVariable` and `@DisabledIfEnvironmentVariable` are *repeatable annotations*. Consequently, these annotations may be declared multiple times on a test interface, test class, or test method. Specifically, these annotations will be found if they are directly present, indirectly present, or meta-present on a given element.

2.9.6. Custom Conditions

As an alternative to implementing an `ExecutionCondition`, a container or test may be enabled or disabled based on a *condition method* configured via the `@EnabledIf` and `@DisabledIf` annotations. A condition method must have a `boolean` return type and may accept either no arguments or a single `ExtensionContext` argument.

The following test class demonstrates how to configure a local method named `customCondition` via `@EnabledIf` and `@DisabledIf`.

```
@Test
@EnabledIf("customCondition")
void enabled() {
    // ...
}

@Test
@DisabledIf("customCondition")
void disabled() {
    // ...
}

boolean customCondition() {
    return true;
}
```

Alternatively, the condition method can be located outside the test class. In this case, it must be referenced by its *fully qualified name* as demonstrated in the following example.

```
package example;

import org.junit.jupiter.api.Test;
import org.junit.jupiter.api.condition.EnabledIf;

class ExternalCustomConditionDemo {
```

```

@Test
@EnabledIf("example.ExternalCondition#customCondition")
void enabled() {
    // ...
}
}

class ExternalCondition {

    static boolean customCondition() {
        return true;
    }
}
}

```

There are several cases where a condition method would need to be `static`:



- when `@EnabledIf` or `@DisabledIf` is used at class level
- when `@EnabledIf` or `@DisabledIf` is used on a `@ParameterizedTest` or a `@TestTemplate` method
- when the condition method is located in an external class

In any other case, you can use either static methods or instance methods as condition methods.

It is often the case that you can use an existing static method in a utility class as a custom condition.



For example, `java.awt.GraphicsEnvironment` provides a `public static boolean isHeadless()` method that can be used to determine if the current environment does not support a graphical display. Thus, if you have a test that depends on graphical support you can disable it when such support is unavailable as follows.

```

@DisabledIf(value = "java.awt.GraphicsEnvironment#isHeadless",
    disabledReason = "headless environment")

```

2.10. Tagging and Filtering

Test classes and methods can be tagged via the `@Tag` annotation. Those tags can later be used to filter [test discovery and execution](#). Please refer to the [Tags](#) section for more information about tag support in the JUnit Platform.

```

import org.junit.jupiter.api.Tag;
import org.junit.jupiter.api.Test;

```

```

@Tag("fast")
@Tag("model")
class TaggingDemo {

    @Test
    @Tag("taxes")
    void testingTaxCalculation() {
    }

}

```



See [Meta-Annotations and Composed Annotations](#) for examples demonstrating how to create custom annotations for tags.

2.11. Test Execution Order

By default, test classes and methods will be ordered using an algorithm that is deterministic but intentionally nonobvious. This ensures that subsequent runs of a test suite execute test classes and test methods in the same order, thereby allowing for repeatable builds.



See [Definitions](#) for a definition of *test method* and *test class*.

2.11.1. Method Order

Although true *unit tests* typically should not rely on the order in which they are executed, there are times when it is necessary to enforce a specific test method execution order—for example, when writing *integration tests* or *functional tests* where the sequence of the tests is important, especially in conjunction with `@TestInstance(Lifecycle.PER_CLASS)`.

To control the order in which test methods are executed, annotate your test class or test interface with `@TestMethodOrder` and specify the desired `MethodOrderer` implementation. You can implement your own custom `MethodOrderer` or use one of the following built-in `MethodOrderer` implementations.

- `MethodOrderer.DisplayName`: sorts test methods *alphanumerically* based on their display names (see [display name generation precedence rules](#))
- `MethodOrderer.MethodName`: sorts test methods *alphanumerically* based on their names and formal parameter lists
- `MethodOrderer.OrderAnnotation`: sorts test methods *numerically* based on values specified via the `@Order` annotation
- `MethodOrderer.Random`: orders test methods *pseudo-randomly* and supports configuration of a custom *seed*
- `MethodOrderer.Alphanumeric`: sorts test methods *alphanumerically* based on their names and formal parameter lists; **deprecated in favor of `MethodOrderer.MethodName`, to be removed in 6.0**



See also: [Wrapping Behavior of Callbacks](#)

The following example demonstrates how to guarantee that test methods are executed in the order specified via the `@Order` annotation.

```
import org.junit.jupiter.api.MethodOrderer.OrderAnnotation;
import org.junit.jupiter.api.Order;
import org.junit.jupiter.api.Test;
import org.junit.jupiter.api.TestMethodOrder;

@TestMethodOrder(OrderAnnotation.class)
class OrderedTestsDemo {

    @Test
    @Order(1)
    void nullValues() {
        // perform assertions against null values
    }

    @Test
    @Order(2)
    void emptyValues() {
        // perform assertions against empty values
    }

    @Test
    @Order(3)
    void validValues() {
        // perform assertions against valid values
    }
}
```

Setting the Default Method Orderer

You can use the `junit.jupiter.testmethod.order.default` configuration parameter to specify the fully qualified class name of the `MethodOrderer` you would like to use by default. Just like for the orderer configured via the `@TestMethodOrder` annotation, the supplied class has to implement the `MethodOrderer` interface. The default orderer will be used for all tests unless the `@TestMethodOrder` annotation is present on an enclosing test class or test interface.

For example, to use the `MethodOrderer.OrderAnnotation` method orderer by default, you should set the configuration parameter to the corresponding fully qualified class name (e.g., in `src/test/resources/junit-platform.properties`):

```
junit.jupiter.testmethod.order.default = \
    org.junit.jupiter.api.MethodOrderer$OrderAnnotation
```

Similarly, you can specify the fully qualified name of any custom class that implements `MethodOrderer`.

2.11.2. Class Order

Although test classes typically should not rely on the order in which they are executed, there are times when it is desirable to enforce a specific test class execution order. You may wish to execute test classes in a random order to ensure there are no accidental dependencies between test classes, or you may wish to order test classes to optimize build time as outlined in the following scenarios.

- Run previously failing tests and faster tests first: "fail fast" mode
- With parallel execution enabled, schedule longer tests first: "shortest test plan execution duration" mode
- Various other use cases

To configure test class execution order *globally* for the entire test suite, use the `junit.jupiter.testclass.order.default` configuration parameter to specify the fully qualified class name of the `ClassOrderer` you would like to use. The supplied class must implement the `ClassOrderer` interface.

You can implement your own custom `ClassOrderer` or use one of the following built-in `ClassOrderer` implementations.

- `ClassOrderer.ClassName`: sorts test classes *alphanumerically* based on their fully qualified class names
- `ClassOrderer.DisplayName`: sorts test classes *alphanumerically* based on their display names (see [display name generation precedence rules](#))
- `ClassOrderer.OrderAnnotation`: sorts test classes *numerically* based on values specified via the `@Order` annotation
- `ClassOrderer.Random`: orders test classes *pseudo-randomly* and supports configuration of a custom *seed*

For example, for the `@Order` annotation to be honored on *test classes*, you should configure the `ClassOrderer.OrderAnnotation` class orderer using the configuration parameter with the corresponding fully qualified class name (e.g., in `src/test/resources/junit-platform.properties`):

```
junit.jupiter.testclass.order.default = \
    org.junit.jupiter.api.ClassOrderer$OrderAnnotation
```

The configured `ClassOrderer` will be applied to all top-level test classes (including `static` nested test classes) and `@Nested` test classes.



Top-level test classes will be ordered relative to each other; whereas, `@Nested` test classes will be ordered relative to other `@Nested` test classes sharing the same *enclosing class*.

To configure test class execution order *locally* for `@Nested` test classes, declare the `@TestClassOrder` annotation on the enclosing class for the `@Nested` test classes you want to order, and supply a class reference to the `ClassOrderer` implementation you would like to use directly in the `@TestClassOrder`

annotation. The configured `ClassOrderer` will be applied recursively to `@Nested` test classes and their `@Nested` test classes. Note that a local `@TestClassOrder` declaration always overrides an inherited `@TestClassOrder` declaration or a `ClassOrderer` configured globally via the `junit.jupiter.testclass.order.default` configuration parameter.

The following example demonstrates how to guarantee that `@Nested` test classes are executed in the order specified via the `@Order` annotation.

```
import org.junit.jupiter.api.ClassOrderer;
import org.junit.jupiter.api.Nested;
import org.junit.jupiter.api.Order;
import org.junit.jupiter.api.Test;
import org.junit.jupiter.api.TestClassOrder;

@TestClassOrder(ClassOrderer.OrderAnnotation.class)
class OrderedNestedTestClassesDemo {

    @Nested
    @Order(1)
    class PrimaryTests {

        @Test
        void test1() {
        }
    }

    @Nested
    @Order(2)
    class SecondaryTests {

        @Test
        void test2() {
        }
    }
}
```

2.12. Test Instance Lifecycle

In order to allow individual test methods to be executed in isolation and to avoid unexpected side effects due to mutable test instance state, JUnit creates a new instance of each test class before executing each *test method* (see [Definitions](#)). This "per-method" test instance lifecycle is the default behavior in JUnit Jupiter and is analogous to all previous versions of JUnit.



Please note that the test class will still be instantiated if a given *test method* is *disabled* via a [condition](#) (e.g., `@Disabled`, `@DisabledOnOs`, etc.) even when the "per-method" test instance lifecycle mode is active.

If you would prefer that JUnit Jupiter execute all test methods on the same test instance, annotate

your test class with `@TestInstance(Lifecycle.PER_CLASS)`. When using this mode, a new test instance will be created once per test class. Thus, if your test methods rely on state stored in instance variables, you may need to reset that state in `@BeforeEach` or `@AfterEach` methods.

The "per-class" mode has some additional benefits over the default "per-method" mode. Specifically, with the "per-class" mode it becomes possible to declare `@BeforeAll` and `@AfterAll` on non-static methods as well as on interface `default` methods. The "per-class" mode therefore also makes it possible to use `@BeforeAll` and `@AfterAll` methods in `@Nested` test classes.



Beginning with Java 16, `@BeforeAll` and `@AfterAll` methods can be declared as `static` in `@Nested` test classes.

If you are authoring tests using the Kotlin programming language, you may also find it easier to implement non-static `@BeforeAll` and `@AfterAll` lifecycle methods as well as `@MethodSource` factory methods by switching to the "per-class" test instance lifecycle mode.

2.12.1. Changing the Default Test Instance Lifecycle

If a test class or test interface is not annotated with `@TestInstance`, JUnit Jupiter will use a *default* lifecycle mode. The standard *default* mode is `PER_METHOD`; however, it is possible to change the *default* for the execution of an entire test plan. To change the default test instance lifecycle mode, set the `junit.jupiter.testinstance.lifecycle.default` *configuration parameter* to the name of an enum constant defined in `TestInstance.Lifecycle`, ignoring case. This can be supplied as a JVM system property, as a *configuration parameter* in the `LauncherDiscoveryRequest` that is passed to the `Launcher`, or via the JUnit Platform configuration file (see [Configuration Parameters](#) for details).

For example, to set the default test instance lifecycle mode to `Lifecycle.PER_CLASS`, you can start your JVM with the following system property.

```
-Djunit.jupiter.testinstance.lifecycle.default=per_class
```

Note, however, that setting the default test instance lifecycle mode via the JUnit Platform configuration file is a more robust solution since the configuration file can be checked into a version control system along with your project and can therefore be used within IDEs and your build software.

To set the default test instance lifecycle mode to `Lifecycle.PER_CLASS` via the JUnit Platform configuration file, create a file named `junit-platform.properties` in the root of the class path (e.g., `src/test/resources`) with the following content.

```
junit.jupiter.testinstance.lifecycle.default = per_class
```



Changing the *default* test instance lifecycle mode can lead to unpredictable results and fragile builds if not applied consistently. For example, if the build configures "per-class" semantics as the default but tests in the IDE are executed using "per-method" semantics, that can make it difficult to debug errors that occur on the build server. It is therefore recommended to change the default in the JUnit Platform configuration file instead of via a JVM system property.

2.13. Nested Tests

`@Nested` tests give the test writer more capabilities to express the relationship among several groups of tests. Such nested tests make use of Java's nested classes and facilitate hierarchical thinking about the test structure. Here's an elaborate example, both as source code and as a screenshot of the execution within an IDE.

Nested test suite for testing a stack

```
import static org.junit.jupiter.api.Assertions.assertEquals;
import static org.junit.jupiter.api.Assertions.assertFalse;
import static org.junit.jupiter.api.Assertions.assertThrows;
import static org.junit.jupiter.api.Assertions.assertTrue;

import java.util.EmptyStackException;
import java.util.Stack;

import org.junit.jupiter.api.BeforeEach;
import org.junit.jupiter.api.DisplayName;
import org.junit.jupiter.api.Nested;
import org.junit.jupiter.api.Test;

@DisplayName("A stack")
class TestingAStackDemo {

    Stack<Object> stack;

    @Test
    @DisplayName("is instantiated with new Stack()")
    void isInstantiatedWithNew() {
        new Stack<>();
    }

    @Nested
    @DisplayName("when new")
    class WhenNew {

        @BeforeEach
        void createNewStack() {
            stack = new Stack<>();
        }

        @Test
        @DisplayName("is empty")
        void isEmpty() {
            assertTrue(stack.isEmpty());
        }

        @Test
        @DisplayName("throws EmptyStackException when popped")
    }
}
```

```

void throwsExceptionWhenPopped() {
    assertThrows(EmptyStackException.class, stack::pop);
}

@Test
@DisplayName("throws EmptyStackException when peeked")
void throwsExceptionWhenPeeked() {
    assertThrows(EmptyStackException.class, stack::peek);
}

@Nested
@DisplayName("after pushing an element")
class AfterPushing {

    String anElement = "an element";

    @BeforeEach
    void pushAnElement() {
        stack.push(anElement);
    }


    @Test
    @DisplayName("it is no longer empty")
    void isEmpty() {
        assertFalse(stack.isEmpty());
    }

    @Test
    @DisplayName("returns the element when popped and is empty")
    void returnElementWhenPopped() {
        assertEquals(anElement, stack.pop());
        assertTrue(stack.isEmpty());
    }

    @Test
    @DisplayName("returns the element when peeked but remains not empty")
    void returnElementWhenPeeked() {
        assertEquals(anElement, stack.peek());
        assertFalse(stack.isEmpty());
    }
}
}
}

```

When executing this example in an IDE, the test execution tree in the GUI will look similar to the following image.

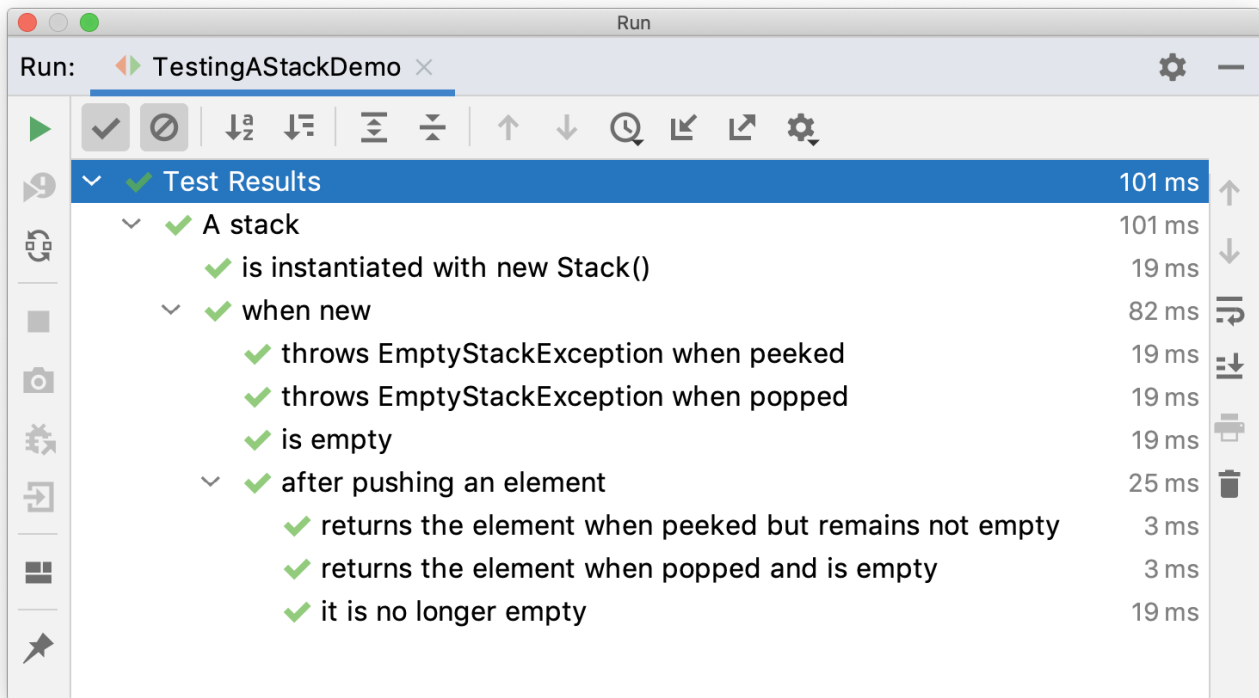

Executing a nested test in an IDE

In this example, preconditions from outer tests are used in inner tests by defining hierarchical lifecycle methods for the setup code. For example, `createNewStack()` is a `@BeforeEach` lifecycle method that is used in the test class in which it is defined and in all levels in the nesting tree below the class in which it is defined.

The fact that setup code from outer tests is run before inner tests are executed gives you the ability to run all tests independently. You can even run inner tests alone without running the outer tests, because the setup code from the outer tests is always executed.



Only non-static nested classes (i.e. inner classes) can serve as `@Nested` test classes. Nesting can be arbitrarily deep, and those inner classes are subject to full lifecycle support with one exception: `@BeforeAll` and `@AfterAll` methods do not work by default. The reason is that Java does not allow `static` members in inner classes prior to Java 16. However, this restriction can be circumvented by annotating a `@Nested` test class with `@TestInstance(Lifecycle.PER_CLASS)` (see [Test Instance Lifecycle](#)). If you are using Java 16 or higher, `@BeforeAll` and `@AfterAll` methods can be declared as `static` in `@Nested` test classes, and this restriction no longer applies.

2.14. Dependency Injection for Constructors and Methods

In all prior JUnit versions, test constructors or methods were not allowed to have parameters (at least not with the standard `Runner` implementations). As one of the major changes in JUnit Jupiter, both test constructors and methods are now permitted to have parameters. This allows for greater flexibility and enables *Dependency Injection* for constructors and methods.

`ParameterResolver` defines the API for test extensions that wish to *dynamically* resolve parameters at runtime. If a *test class* constructor, a *test method*, or a *lifecycle method* (see [Definitions](#)) accepts a parameter, the parameter must be resolved at runtime by a registered `ParameterResolver`.

There are currently three built-in resolvers that are registered automatically.

- `TestInfoParameterResolver`: if a constructor or method parameter is of type `TestInfo`, the `TestInfoParameterResolver` will supply an instance of `TestInfo` corresponding to the current container or test as the value for the parameter. The `TestInfo` can then be used to retrieve information about the current container or test such as the display name, the test class, the test method, and associated tags. The display name is either a technical name, such as the name of the test class or test method, or a custom name configured via `@DisplayName`.

`TestInfo` acts as a drop-in replacement for the `TestName` rule from JUnit 4. The following demonstrates how to have `TestInfo` injected into a `@BeforeAll` method, test class constructor, `@BeforeEach` method, and `@Test` method.

```
import static org.junit.jupiter.api.Assertions.assertEquals;
import static org.junit.jupiter.api.Assertions.assertTrue;

import org.junit.jupiter.api.BeforeAll;
import org.junit.jupiter.api.BeforeEach;
import org.junit.jupiter.api.DisplayName;
import org.junit.jupiter.api.Tag;
import org.junit.jupiter.api.Test;
import org.junit.jupiter.api.TestInfo;

@DisplayName("TestInfo Demo")
class TestInfoDemo {

    @BeforeAll
    static void beforeAll(TestInfo testInfo) {
        assertEquals("TestInfo Demo", testInfo.getDisplayName());
    }

    TestInfoDemo(TestInfo testInfo) {
        String displayName = testInfo.getDisplayName();
        assertTrue(displayName.equals("TEST 1") || displayName.equals("test2()"));
    }

    @BeforeEach
    void init(TestInfo testInfo) {
        String displayName = testInfo.getDisplayName();
        assertTrue(displayName.equals("TEST 1") || displayName.equals("test2()"));
    }

    @Test
    @DisplayName("TEST 1")
    @Tag("my-tag")
    void test1(TestInfo testInfo) {
```

```

        assertEquals("TEST 1", testInfo.getDisplayName());
        assertTrue(testInfo.getTags().contains("my-tag"));
    }

    @Test
    void test2() {
    }
}

```

- **RepetitionExtension**: if a method parameter in a `@RepeatedTest`, `@BeforeEach`, or `@AfterEach` method is of type `RepetitionInfo`, the `RepetitionExtension` will supply an instance of `RepetitionInfo`. `RepetitionInfo` can then be used to retrieve information about the current repetition, the total number of repetitions, the number of repetitions that have failed, and the failure threshold for the corresponding `@RepeatedTest`. Note, however, that `RepetitionExtension` is not registered outside the context of a `@RepeatedTest`. See [Repeated Test Examples](#).
- **TestReporterParameterResolver**: if a constructor or method parameter is of type `TestReporter`, the `TestReporterParameterResolver` will supply an instance of `TestReporter`. The `TestReporter` can be used to publish additional data about the current test run or attach files to it. The data can be consumed in a `TestExecutionListener` via the `reportingEntryPublished()` or `fileEntryPublished()` method, respectively. This allows them to be viewed in IDEs or included in reports.

In JUnit Jupiter you should use `TestReporter` where you used to print information to `stdout` or `stderr` in JUnit 4. Using `@RunWith(JUnitPlatform.class)` will output all reported entries to `stdout`. In addition, some IDEs print report entries to `stdout` or display them in the user interface for test results.

```

class TestReporterDemo {

    @Test
    void reportSingleValue(TestReporter testReporter) {
        testReporter.publishEntry("a status message");
    }

    @Test
    void reportKeyValuePair(TestReporter testReporter) {
        testReporter.publishEntry("a key", "a value");
    }

    @Test
    void reportMultipleKeyValuePairs(TestReporter testReporter) {
        Map<String, String> values = new HashMap<>();
        values.put("user name", "dk38");
        values.put("award year", "1974");

        testReporter.publishEntry(values);
    }

    @Test

```

```

    void reportFiles(TestReporter testReporter, @TempDir Path tempDir) throws
    Exception {

        testReporter.publishFile("test1.txt", MediaType.TEXT_PLAIN_UTF_8,
            file -> Files.write(file, singletonList("Test 1")));

        Path existingFile = Files.write(tempDir.resolve("test2.txt"), singletonList
("Test 2"));
        testReporter.publishFile(existingFile, MediaType.TEXT_PLAIN_UTF_8);

        testReporter.publishDirectory("test3", dir -> {
            Files.write(dir.resolve("nested1.txt"), singletonList("Nested content
1"));
            Files.write(dir.resolve("nested2.txt"), singletonList("Nested content
2"));
        });

        Path existingDir = Files.createDirectory(tempDir.resolve("test4"));
        Files.write(existingDir.resolve("nested1.txt"), singletonList("Nested content
1"));
        Files.write(existingDir.resolve("nested2.txt"), singletonList("Nested content
2"));
        testReporter.publishDirectory(existingDir);
    }
}

```



Other parameter resolvers must be explicitly enabled by registering appropriate [extensions](#) via `@ExtendWith`.

Check out the [RandomParametersExtension](#) for an example of a custom [ParameterResolver](#). While not intended to be production-ready, it demonstrates the simplicity and expressiveness of both the extension model and the parameter resolution process. [MyRandomParametersTest](#) demonstrates how to inject random values into `@Test` methods.

```

@ExtendWith(RandomParametersExtension.class)
class MyRandomParametersTest {

    @Test
    void injectsInteger(@Random int i, @Random int j) {
        assertNotEquals(i, j);
    }

    @Test
    void injectsDouble(@Random double d) {
        assertEquals(0.0, d, 1.0);
    }
}

```


For real-world use cases, check out the source code for the [MockitoExtension](#) and the [SpringExtension](#).

When the type of the parameter to inject is the only condition for your [ParameterResolver](#), you can use the generic [TypeBasedParameterResolver](#) base class. The `supportsParameters` method is implemented behind the scenes and supports parameterized types.

2.15. Test Interfaces and Default Methods

JUnit Jupiter allows `@Test`, `@RepeatedTest`, `@ParameterizedTest`, `@TestFactory`, `@TestTemplate`, `@BeforeEach`, and `@AfterEach` to be declared on interface default methods. `@BeforeAll` and `@AfterAll` can either be declared on `static` methods in a test interface or on interface default methods *if* the test interface or test class is annotated with `@TestInstance(Lifecycle.PER_CLASS)` (see [Test Instance Lifecycle](#)). Here are some examples.

```
@TestInstance(Lifecycle.PER_CLASS)
interface TestLifecycleLogger {

    static final Logger logger = Logger.getLogger(TestLifecycleLogger.class.
getName());

    @BeforeAll
    default void beforeAllTests() {
        logger.info("Before all tests");
    }

    @AfterAll
    default void afterAllTests() {
        logger.info("After all tests");
    }

    @BeforeEach
    default void beforeEachTest(TestInfo testInfo) {
        logger.info(() -> String.format("About to execute [%s]",
            testInfo.getDisplayName()));
    }

    @AfterEach
    default void afterEachTest(TestInfo testInfo) {
        logger.info(() -> String.format("Finished executing [%s]",
            testInfo.getDisplayName()));
    }
}
```

```
interface TestInterfaceDynamicTestsDemo {

    @TestFactory
```

```

default Stream<DynamicTest> dynamicTestsForPalindromes() {
    return Stream.of("racecar", "radar", "mom", "dad")
        .map(text -> dynamicTest(text, () -> assertTrue(isPalindrome(text))));
}
}

```

`@ExtendWith` and `@Tag` can be declared on a test interface so that classes that implement the interface automatically inherit its tags and extensions. See [Before and After Test Execution Callbacks](#) for the source code of the `TimingExtension`.

```

@Tag("timed")
@ExtendWith(TimingExtension.class)
interface TimeExecutionLogger {
}

```

In your test class you can then implement these test interfaces to have them applied.

```

class TestInterfaceDemo implements TestLifecycleLogger,
    TimeExecutionLogger, TestInterfaceDynamicTestsDemo {

    @Test
    void isEqualValue() {
        assertEquals(1, "a".length(), "is always equal");
    }
}

```

Running the `TestInterfaceDemo` results in output similar to the following:

```

INFO example.TestLifecycleLogger - Before all tests
INFO example.TestLifecycleLogger - About to execute [dynamicTestsForPalindromes()]
INFO example.TimingExtension - Method [dynamicTestsForPalindromes] took 19 ms.
INFO example.TestLifecycleLogger - Finished executing [dynamicTestsForPalindromes()]
INFO example.TestLifecycleLogger - About to execute [isEqualValue()]
INFO example.TimingExtension - Method [isEqualValue] took 1 ms.
INFO example.TestLifecycleLogger - Finished executing [isEqualValue()]
INFO example.TestLifecycleLogger - After all tests

```

Another possible application of this feature is to write tests for interface contracts. For example, you can write tests for how implementations of `Object.equals` or `Comparable.compareTo` should behave as follows.

```

public interface Testable<T> {

    T createValue();
}

```

```
}
```

```
public interface EqualsContract<T> extends Testable<T> {  
  
    T createNotEqualValue();  
  
    @Test  
    default void valueEqualsItself() {  
        T value = createValue();  
        assertEquals(value, value);  
    }  
  
    @Test  
    default void valueDoesNotEqualNull() {  
        T value = createValue();  
        assertNotEquals(null, value);  
    }  
  
    @Test  
    default void valueDoesNotEqualDifferentValue() {  
        T value = createValue();  
        T differentValue = createNotEqualValue();  
        assertNotEquals(value, differentValue);  
        assertNotEquals(differentValue, value);  
    }  
  
}
```

```
public interface ComparableContract<T extends Comparable<T>> extends Testable<T> {  
  
    T createSmallerValue();  
  
    @Test  
    default void returnsZeroWhenComparedToItself() {  
        T value = createValue();  
        assertEquals(0, value.compareTo(value));  
    }  
  
    @Test  
    default void returnsPositiveNumberWhenComparedToSmallerValue() {  
        T value = createValue();  
        T smallerValue = createSmallerValue();  
        assertTrue(value.compareTo(smallerValue) > 0);  
    }  
  
    @Test  
    default void returnsNegativeNumberWhenComparedToLargerValue() {
```

```

    T value = createValue();
    T smallerValue = createSmallerValue();
    assertTrue(smallerValue.compareTo(value) < 0);
}
}

```

In your test class you can then implement both contract interfaces thereby inheriting the corresponding tests. Of course you'll have to implement the abstract methods.

```

class StringTests implements ComparableContract<String>, EqualsContract<String> {

    @Override
    public String createValue() {
        return "banana";
    }

    @Override
    public String createSmallerValue() {
        return "apple"; // 'a' < 'b' in "banana"
    }

    @Override
    public String createNotEqualValue() {
        return "cherry";
    }
}

```



The above tests are merely meant as examples and therefore not complete.

2.16. Repeated Tests

JUnit Jupiter provides the ability to repeat a test a specified number of times by annotating a method with `@RepeatedTest` and specifying the total number of repetitions desired. Each invocation of a repeated test behaves like the execution of a regular `@Test` method with full support for the same lifecycle callbacks and extensions.

The following example demonstrates how to declare a test named `repeatedTest()` that will be automatically repeated 10 times.

```

@RepeatedTest(10)
void repeatedTest() {
    // ...
}

```

Since JUnit Jupiter 5.10, `@RepeatedTest` can be configured with a failure threshold which signifies the

number of failures after which remaining repetitions will be automatically skipped. Set the `failureThreshold` attribute to a positive number less than the total number of repetitions in order to skip the invocations of remaining repetitions after the specified number of failures has been encountered.

For example, if you are using `@RepeatedTest` to repeatedly invoke a test that you suspect to be *flaky*, a single failure is sufficient to demonstrate that the test is flaky, and there is no need to invoke the remaining repetitions. To support that specific use case, set `failureThreshold = 1`. You can alternatively set the threshold to a number greater than 1 depending on your use case.

By default, the `failureThreshold` attribute is set to `Integer.MAX_VALUE`, signaling that no failure threshold will be applied, which effectively means that the specified number of repetitions will be invoked regardless of whether any repetitions fail.



If the repetitions of a `@RepeatedTest` method are executed in parallel, no guarantees can be made regarding the failure threshold. It is therefore recommended that a `@RepeatedTest` method be annotated with `@Execution(SAME_THREAD)` when parallel execution is configured. See [Parallel Execution](#) for further details.

In addition to specifying the number of repetitions and failure threshold, a custom display name can be configured for each repetition via the `name` attribute of the `@RepeatedTest` annotation. Furthermore, the display name can be a pattern composed of a combination of static text and dynamic placeholders. The following placeholders are currently supported.

- `{displayName}`: display name of the `@RepeatedTest` method
- `{currentRepetition}`: the current repetition count
- `{totalRepetitions}`: the total number of repetitions

The default display name for a given repetition is generated based on the following pattern: `"repetition {currentRepetition} of {totalRepetitions}"`. Thus, the display names for individual repetitions of the previous `repeatedTest()` example would be: `repetition 1 of 10`, `repetition 2 of 10`, etc. If you would like the display name of the `@RepeatedTest` method included in the name of each repetition, you can define your own custom pattern or use the predefined `RepeatedTest.LONG_DISPLAY_NAME` pattern. The latter is equal to `"{displayName} :: repetition {currentRepetition} of {totalRepetitions}"` which results in display names for individual repetitions like `repeatedTest() :: repetition 1 of 10`, `repeatedTest() :: repetition 2 of 10`, etc.

In order to retrieve information about the current repetition, the total number of repetitions, the number of repetitions that have failed, and the failure threshold, a developer can choose to have an instance of `RepetitionInfo` injected into a `@RepeatedTest`, `@BeforeEach`, or `@AfterEach` method.

2.16.1. Repeated Test Examples

The `RepeatedTestsDemo` class at the end of this section demonstrates several examples of repeated tests.

The `repeatedTest()` method is identical to the example from the previous section; whereas, `repeatedTestWithRepetitionInfo()` demonstrates how to have an instance of `RepetitionInfo` injected

into a test to access the total number of repetitions for the current repeated test.

`repeatedTestWithFailureThreshold()` demonstrates how to set a failure threshold and simulates an unexpected failure for every second repetition. The resulting behavior can be viewed in the `ConsoleLauncher` output at the end of this section.

The next two methods demonstrate how to include a custom `@DisplayName` for the `@RepeatedTest` method in the display name of each repetition. `customDisplayName()` combines a custom display name with a custom pattern and then uses `TestInfo` to verify the format of the generated display name. `Repeat!` is the `{displayName}` which comes from the `@DisplayName` declaration, and `1/1` comes from `{currentRepetition}/{totalRepetitions}`. In contrast, `customDisplayNameWithLongPattern()` uses the aforementioned predefined `RepeatedTest.LONG_DISPLAY_NAME` pattern.

`repeatedTestInGerman()` demonstrates the ability to translate display names of repeated tests into foreign languages—in this case German, resulting in names for individual repetitions such as: `Wiederholung 1 von 5`, `Wiederholung 2 von 5`, etc.

Since the `beforeEach()` method is annotated with `@BeforeEach` it will get executed before each repetition of each repeated test. By having the `TestInfo` and `RepetitionInfo` injected into the method, we see that it's possible to obtain information about the currently executing repeated test. Executing `RepeatedTestsDemo` with the `INFO` log level enabled results in the following output.

```
INFO: About to execute repetition 1 of 10 for repeatedTest
INFO: About to execute repetition 2 of 10 for repeatedTest
INFO: About to execute repetition 3 of 10 for repeatedTest
INFO: About to execute repetition 4 of 10 for repeatedTest
INFO: About to execute repetition 5 of 10 for repeatedTest
INFO: About to execute repetition 6 of 10 for repeatedTest
INFO: About to execute repetition 7 of 10 for repeatedTest
INFO: About to execute repetition 8 of 10 for repeatedTest
INFO: About to execute repetition 9 of 10 for repeatedTest
INFO: About to execute repetition 10 of 10 for repeatedTest
INFO: About to execute repetition 1 of 5 for repeatedTestWithRepetitionInfo
INFO: About to execute repetition 2 of 5 for repeatedTestWithRepetitionInfo
INFO: About to execute repetition 3 of 5 for repeatedTestWithRepetitionInfo
INFO: About to execute repetition 4 of 5 for repeatedTestWithRepetitionInfo
INFO: About to execute repetition 5 of 5 for repeatedTestWithRepetitionInfo
INFO: About to execute repetition 1 of 8 for repeatedTestWithFailureThreshold
INFO: About to execute repetition 2 of 8 for repeatedTestWithFailureThreshold
INFO: About to execute repetition 3 of 8 for repeatedTestWithFailureThreshold
INFO: About to execute repetition 4 of 8 for repeatedTestWithFailureThreshold
INFO: About to execute repetition 1 of 1 for customDisplayName
INFO: About to execute repetition 1 of 1 for customDisplayNameWithLongPattern
INFO: About to execute repetition 1 of 5 for repeatedTestInGerman
INFO: About to execute repetition 2 of 5 for repeatedTestInGerman
INFO: About to execute repetition 3 of 5 for repeatedTestInGerman
INFO: About to execute repetition 4 of 5 for repeatedTestInGerman
INFO: About to execute repetition 5 of 5 for repeatedTestInGerman
```

```

import static org.junit.jupiter.api.Assertions.assertEquals;
import static org.junit.jupiter.api.Assertions.fail;

import java.util.logging.Logger;

import org.junit.jupiter.api.BeforeEach;
import org.junit.jupiter.api.DisplayName;
import org.junit.jupiter.api.RepeatedTest;
import org.junit.jupiter.api.RepetitionInfo;
import org.junit.jupiter.api.TestInfo;

class RepeatedTestsDemo {

    private Logger logger = // ...

    @BeforeEach
    void beforeEach(TestInfo testInfo, RepetitionInfo repetitionInfo) {
        int currentRepetition = repetitionInfo.getCurrentRepetition();
        int totalRepetitions = repetitionInfo.getTotalRepetitions();
        String methodName = testInfo.getTestMethod().get().getName();
        logger.info(String.format("About to execute repetition %d of %d for %s", //
            currentRepetition, totalRepetitions, methodName));
    }

    @RepeatedTest(10)
    void repeatedTest() {
        // ...
    }

    @RepeatedTest(5)
    void repeatedTestWithRepetitionInfo(RepetitionInfo repetitionInfo) {
        assertEquals(5, repetitionInfo.getTotalRepetitions());
    }

    @RepeatedTest(value = 8, failureThreshold = 2)
    void repeatedTestWithFailureThreshold(RepetitionInfo repetitionInfo) {
        // Simulate unexpected failure every second repetition
        if (repetitionInfo.getCurrentRepetition() % 2 == 0) {
            fail("Boom!");
        }
    }

    @RepeatedTest(value = 1, name = "{displayName}
{currentRepetition}/{totalRepetitions}")
    @DisplayName("Repeat!")
    void customDisplayName(TestInfo testInfo) {
        assertEquals("Repeat! 1/1", testInfo.getDisplayName());
    }

    @RepeatedTest(value = 1, name = RepeatedTest.LONG_DISPLAY_NAME)

```

```

@DisplayName("Details...")
void customDisplayNameWithLongPattern(TestInfo testInfo) {
    assertEquals("Details... :: repetition 1 of 1", testInfo.getDisplayName());
}

@RepeatedTest(value = 5, name = "Wiederholung {currentRepetition} von
{totalRepetitions}")
void repeatedTestInGerman() {
    // ...
}
}

```

When using the `ConsoleLauncher` with the unicode theme enabled, execution of `RepeatedTestsDemo` results in the following output to the console.

```

├─ RepeatedTestsDemo ✓
│   ├─ repeatedTest() ✓
│   │   ├─ repetition 1 of 10 ✓
│   │   ├─ repetition 2 of 10 ✓
│   │   ├─ repetition 3 of 10 ✓
│   │   ├─ repetition 4 of 10 ✓
│   │   ├─ repetition 5 of 10 ✓
│   │   ├─ repetition 6 of 10 ✓
│   │   ├─ repetition 7 of 10 ✓
│   │   ├─ repetition 8 of 10 ✓
│   │   ├─ repetition 9 of 10 ✓
│   │   └─ repetition 10 of 10 ✓
│   ├─ repeatedTestWithRepetitionInfo(RepetitionInfo) ✓
│   │   ├─ repetition 1 of 5 ✓
│   │   ├─ repetition 2 of 5 ✓
│   │   ├─ repetition 3 of 5 ✓
│   │   ├─ repetition 4 of 5 ✓
│   │   └─ repetition 5 of 5 ✓
│   ├─ repeatedTestWithFailureThreshold(RepetitionInfo) ✓
│   │   ├─ repetition 1 of 8 ✓
│   │   ├─ repetition 2 of 8 ✗ Boom!
│   │   ├─ repetition 3 of 8 ✓
│   │   ├─ repetition 4 of 8 ✗ Boom!
│   │   ├─ repetition 5 of 8 ↷ Failure threshold [2] exceeded
│   │   ├─ repetition 6 of 8 ↷ Failure threshold [2] exceeded
│   │   ├─ repetition 7 of 8 ↷ Failure threshold [2] exceeded
│   │   └─ repetition 8 of 8 ↷ Failure threshold [2] exceeded
│   ├─ Repeat! ✓
│   │   └─ Repeat! 1/1 ✓
│   ├─ Details... ✓
│   │   └─ Details... :: repetition 1 of 1 ✓
│   └─ repeatedTestInGerman() ✓
│       └─ Wiederholung 1 von 5 ✓

```



```
| | — Wiederholung 2 von 5 ✓  
| | — Wiederholung 3 von 5 ✓  
| | — Wiederholung 4 von 5 ✓  
| | — Wiederholung 5 von 5 ✓
```

2.17. Parameterized Tests

Parameterized tests make it possible to run a test multiple times with different arguments. They are declared just like regular `@Test` methods but use the `@ParameterizedTest` annotation instead. In addition, you must declare at least one *source* that will provide the arguments for each invocation and then *consume* the arguments in the test method.

The following example demonstrates a parameterized test that uses the `@ValueSource` annotation to specify a `String` array as the source of arguments.

```
@ParameterizedTest  
@ValueSource(strings = { "racecar", "radar", "able was I ere I saw elba" })  
void palindromes(String candidate) {  
    assertTrue(StringUtils.isPalindrome(candidate));  
}
```

When executing the above parameterized test method, each invocation will be reported separately. For instance, the `ConsoleLauncher` will print output similar to the following.

```
palindromes(String) ✓  
| — [1] candidate=racecar ✓  
| — [2] candidate=radar ✓  
| — [3] candidate=able was I ere I saw elba ✓
```

2.17.1. Required Setup

In order to use parameterized tests you need to add a dependency on the `junit-jupiter-params` artifact. Please refer to [Dependency Metadata](#) for details.

2.17.2. Consuming Arguments

Parameterized test methods typically *consume* arguments directly from the configured source (see [Sources of Arguments](#)) following a one-to-one correlation between argument source index and method parameter index (see examples in `@CsvSource`). However, a parameterized test method may also choose to *aggregate* arguments from the source into a single object passed to the method (see [Argument Aggregation](#)). Additional arguments may also be provided by a `ParameterResolver` (e.g., to obtain an instance of `TestInfo`, `TestReporter`, etc.). Specifically, a parameterized test method must declare formal parameters according to the following rules.

- Zero or more *indexed arguments* must be declared first.
- Zero or more *aggregators* must be declared next.

- Zero or more arguments supplied by a `ParameterResolver` must be declared last.

In this context, an *indexed argument* is an argument for a given index in the `Arguments` provided by an `ArgumentsProvider` that is passed as an argument to the parameterized method at the same index in the method's formal parameter list. An *aggregator* is any parameter of type `ArgumentsAccessor` or any parameter annotated with `@AggregateWith`.

AutoCloseable arguments

Arguments that implement `java.lang.AutoCloseable` (or `java.io.Closeable` which extends `java.lang.AutoCloseable`) will be automatically closed after `@AfterEach` methods and `AfterEachCallback` extensions have been called for the current parameterized test invocation.



To prevent this from happening, set the `autoCloseArguments` attribute in `@ParameterizedTest` to `false`. Specifically, if an argument that implements `AutoCloseable` is reused for multiple invocations of the same parameterized test method, you must annotate the method with `@ParameterizedTest(autoCloseArguments = false)` to ensure that the argument is not closed between invocations.

2.17.3. Sources of Arguments

Out of the box, JUnit Jupiter provides quite a few *source* annotations. Each of the following subsections provides a brief overview and an example for each of them. Please refer to the Javadoc in the `org.junit.jupiter.params.provider` package for additional information.

`@ValueSource`

`@ValueSource` is one of the simplest possible sources. It lets you specify a single array of literal values and can only be used for providing a single argument per parameterized test invocation.

The following types of literal values are supported by `@ValueSource`.

- `short`
- `byte`
- `int`
- `long`
- `float`
- `double`
- `char`
- `boolean`
- `java.lang.String`
- `java.lang.Class`

For example, the following `@ParameterizedTest` method will be invoked three times, with the values

1, 2, and 3 respectively.

```
@ParameterizedTest
@ValueSource(ints = { 1, 2, 3 })
void testWithValueSource(int argument) {
    assertTrue(argument > 0 && argument < 4);
}
```

Null and Empty Sources

In order to check corner cases and verify proper behavior of our software when it is supplied *bad input*, it can be useful to have `null` and *empty* values supplied to our parameterized tests. The following annotations serve as sources of `null` and empty values for parameterized tests that accept a single argument.

- `@NullSource`: provides a single `null` argument to the annotated `@ParameterizedTest` method.
 - `@NullSource` cannot be used for a parameter that has a primitive type.
- `@EmptySource`: provides a single *empty* argument to the annotated `@ParameterizedTest` method for parameters of the following types: `java.lang.String`, `java.util.Collection` (and concrete subtypes with a `public` no-arg constructor), `java.util.List`, `java.util.Set`, `java.util.SortedSet`, `java.util.NavigableSet`, `java.util.Map` (and concrete subtypes with a `public` no-arg constructor), `java.util.SortedMap`, `java.util.NavigableMap`, primitive arrays (e.g., `int[]`, `char[][]`, etc.), object arrays (e.g., `String[]`, `Integer[][]`, etc.).
- `@NullAndEmptySource`: a *composed annotation* that combines the functionality of `@NullSource` and `@EmptySource`.

If you need to supply multiple varying types of *blank* strings to a parameterized test, you can achieve that using `@ValueSource`—for example, `@ValueSource(strings = { " ", " ", "\t", "\n" })`.

You can also combine `@NullSource`, `@EmptySource`, and `@ValueSource` to test a wider range of `null`, *empty*, and *blank* input. The following example demonstrates how to achieve this for strings.

```
@ParameterizedTest
@NullSource
@EmptySource
@ValueSource(strings = { " ", "   ", "\t", "\n" })
void nullEmptyAndBlankStrings(String text) {
    assertTrue(text == null || text.trim().isEmpty());
}
```

Making use of the composed `@NullAndEmptySource` annotation simplifies the above as follows.

```
@ParameterizedTest
@NullAndEmptySource
@ValueSource(strings = { " ", "   ", "\t", "\n" })
```

```
void nullEmptyAndBlankStrings(String text) {
    assertTrue(text == null || text.trim().isEmpty());
}
```



Both variants of the `nullEmptyAndBlankStrings(String)` parameterized test method result in six invocations: 1 for `null`, 1 for the empty string, and 4 for the explicit blank strings supplied via `@ValueSource`.

@EnumSource

`@EnumSource` provides a convenient way to use `Enum` constants.

```
@ParameterizedTest
@EnumSource(ChronoUnit.class)
void testWithEnumSource(TemporalUnit unit) {
    assertNotNull(unit);
}
```

The annotation's `value` attribute is optional. When omitted, the declared type of the first method parameter is used. The test will fail if it does not reference an enum type. Thus, the `value` attribute is required in the above example because the method parameter is declared as `TemporalUnit`, i.e. the interface implemented by `ChronoUnit`, which isn't an enum type. Changing the method parameter type to `ChronoUnit` allows you to omit the explicit enum type from the annotation as follows.

```
@ParameterizedTest
@EnumSource
void testWithEnumSourceWithAutoDetection(ChronoUnit unit) {
    assertNotNull(unit);
}
```

The annotation provides an optional `names` attribute that lets you specify which constants shall be used, like in the following example.

```
@ParameterizedTest
@EnumSource(names = { "DAYS", "HOURS" })
void testWithEnumSourceInclude(ChronoUnit unit) {
    assertTrue(EnumSet.of(ChronoUnit.DAYS, ChronoUnit.HOURS).contains(unit));
}
```

In addition to `names`, you can use the `from` and `to` attributes to specify a range of constants. The range starts from the constant specified in the `from` attribute and includes all subsequent constants up to and including the one specified in the `to` attribute, based on the natural order of the enum constants.

If `from` and `to` attributes are omitted, they default to the first and last constants in the enum type, respectively. If all `names`, `from`, and `to` attributes are omitted, all constants will be used. The following

example demonstrates how to specify a range of constants.

```
@ParameterizedTest
@EnumSource(from = "HOURS", to = "DAYS")
void testWithEnumSourceRange(ChronoUnit unit) {
    assertTrue(EnumSet.of(ChronoUnit.HOURS, ChronoUnit.HALF_DAYS, ChronoUnit.DAYS)
        .contains(unit));
}
```

The `@EnumSource` annotation also provides an optional `mode` attribute that enables fine-grained control over which constants are passed to the test method. For example, you can exclude names from the enum constant pool or specify regular expressions as in the following examples.

```
@ParameterizedTest
@EnumSource(mode = EXCLUDE, names = { "ERAS", "FOREVER" })
void testWithEnumSourceExclude(ChronoUnit unit) {
    assertFalse(EnumSet.of(ChronoUnit.ERAS, ChronoUnit.FOREVER).contains(unit));
}
```

```
@ParameterizedTest
@EnumSource(mode = MATCH_ALL, names = "^.*DAYS$")
void testWithEnumSourceRegex(ChronoUnit unit) {
    assertTrue(unit.name().endsWith("DAYS"));
}
```

You can also combine `mode` with the `from`, `to` and `names` attributes to define a range of constants while excluding specific values from that range as shown below.

```
@ParameterizedTest
@EnumSource(from = "HOURS", to = "DAYS", mode = EXCLUDE, names = { "HALF_DAYS" })
void testWithEnumSourceRangeExclude(ChronoUnit unit) {
    assertTrue(EnumSet.of(ChronoUnit.HOURS, ChronoUnit.DAYS).contains(unit));
    assertFalse(EnumSet.of(ChronoUnit.HALF_DAYS).contains(unit));
}
```

@MethodSource

`@MethodSource` allows you to refer to one or more *factory* methods of the test class or external classes.

Factory methods within the test class must be `static` unless the test class is annotated with `@TestInstance(Lifecycle.PER_CLASS)`; whereas, factory methods in external classes must always be `static`.

Each factory method must generate a *stream of arguments*, and each set of arguments within the stream will be provided as the physical arguments for individual invocations of the annotated

`@ParameterizedTest` method. Generally speaking this translates to a `Stream` of `Arguments` (i.e., `Stream<Arguments>`); however, the actual concrete return type can take on many forms. In this context, a "stream" is anything that JUnit can reliably convert into a `Stream`, such as `Stream`, `DoubleStream`, `LongStream`, `IntStream`, `Collection`, `Iterator`, `Iterable`, an array of objects, or an array of primitives. The "arguments" within the stream can be supplied as an instance of `Arguments`, an array of objects (e.g., `Object[]`), or a single value if the parameterized test method accepts a single argument.

If you only need a single parameter, you can return a `Stream` of instances of the parameter type as demonstrated in the following example.

```
@ParameterizedTest
@MethodSource("stringProvider")
void testWithExplicitLocalMethodSource(String argument) {
    assertNotNull(argument);
}

static Stream<String> stringProvider() {
    return Stream.of("apple", "banana");
}
```

If you do not explicitly provide a factory method name via `@MethodSource`, JUnit Jupiter will search for a *factory* method that has the same name as the current `@ParameterizedTest` method by convention. This is demonstrated in the following example.

```
@ParameterizedTest
@MethodSource
void testWithDefaultLocalMethodSource(String argument) {
    assertNotNull(argument);
}

static Stream<String> testWithDefaultLocalMethodSource() {
    return Stream.of("apple", "banana");
}
```

Streams for primitive types (`DoubleStream`, `IntStream`, and `LongStream`) are also supported as demonstrated by the following example.

```
@ParameterizedTest
@MethodSource("range")
void testWithRangeMethodSource(int argument) {
    assertNotEquals(9, argument);
}

static IntStream range() {
    return IntStream.range(0, 20).skip(10);
}
```

If a parameterized test method declares multiple parameters, you need to return a collection, stream, or array of `Arguments` instances or object arrays as shown below (see the Javadoc for `@MethodSource` for further details on supported return types). Note that `arguments(Object...)` is a static factory method defined in the `Arguments` interface. In addition, `Arguments.of(Object...)` may be used as an alternative to `arguments(Object...)`.

```
@ParameterizedTest
@MethodSource("stringIntAndListProvider")
void testWithMultiArgMethodSource(String str, int num, List<String> list) {
    assertEquals(5, str.length());
    assertTrue(num >=1 && num <=2);
    assertEquals(2, list.size());
}

static Stream<Arguments> stringIntAndListProvider() {
    return Stream.of(
        arguments("apple", 1, Arrays.asList("a", "b")),
        arguments("lemon", 2, Arrays.asList("x", "y"))
    );
}
```

An external, *static factory* method can be referenced by providing its *fully qualified method name* as demonstrated in the following example.

```
package example;

import java.util.stream.Stream;

import org.junit.jupiter.params.ParameterizedTest;
import org.junit.jupiter.params.provider.MethodSource;

class ExternalMethodSourceDemo {

    @ParameterizedTest
    @MethodSource("example.StringsProviders#tinyStrings")
    void testWithExternalMethodSource(String tinyString) {
        // test with tiny string
    }
}

class StringsProviders {

    static Stream<String> tinyStrings() {
        return Stream.of(".", "oo", "000");
    }
}
```

Factory methods can declare parameters, which will be provided by registered implementations of

the `ParameterResolver` extension API. In the following example, the factory method is referenced by its name since there is only one such method in the test class. If there are several local methods with the same name, parameters can also be provided to differentiate them – for example, `@MethodSource("factoryMethod()")` or `@MethodSource("factoryMethod(java.lang.String)")`. Alternatively, the factory method can be referenced by its fully qualified method name, e.g. `@MethodSource("example.MyTests#factoryMethod(java.lang.String)")`.

```
@RegisterExtension
static final IntegerResolver integerResolver = new IntegerResolver();

@ParameterizedTest
@MethodSource("factoryMethodWithArguments")
void testWithFactoryMethodWithArguments(String argument) {
    assertTrue(argument.startsWith("2"));
}

static Stream<Arguments> factoryMethodWithArguments(int quantity) {
    return Stream.of(
        arguments(quantity + " apples"),
        arguments(quantity + " lemons")
    );
}

static class IntegerResolver implements ParameterResolver {

    @Override
    public boolean supportsParameter(ParameterContext parameterContext,
        ExtensionContext extensionContext) {

        return parameterContext.getParameter().getType() == int.class;
    }

    @Override
    public Object resolveParameter(ParameterContext parameterContext,
        ExtensionContext extensionContext) {

        return 2;
    }
}
```

@FieldSource

`@FieldSource` allows you to refer to one or more fields of the test class or external classes.

Fields within the test class must be `static` unless the test class is annotated with `@TestInstance(Lifecycle.PER_CLASS)`; whereas, fields in external classes must always be `static`.

Each field must be able to supply a *stream* of arguments, and each set of "arguments" within the

"stream" will be provided as the physical arguments for individual invocations of the annotated `@ParameterizedTest` method.

In this context, a "stream" is anything that JUnit can reliably convert to a `Stream`; however, the actual concrete field type can take on many forms. Generally speaking this translates to a `Collection`, an `Iterable`, a `Supplier` of a stream (`Stream`, `DoubleStream`, `LongStream`, or `IntStream`), a `Supplier` of an `Iterator`, an array of objects, or an array of primitives. Each set of "arguments" within the "stream" can be supplied as an instance of `Arguments`, an array of objects (for example, `Object[]`, `String[]`, etc.), or a single value if the parameterized test method accepts a single argument.



In contrast to the supported return types for `@MethodSource` factory methods, the value of a `@FieldSource` field cannot be an instance of `Stream`, `DoubleStream`, `LongStream`, `IntStream`, or `Iterator`, since the values of such types are *consumed* the first time they are processed. However, if you wish to use one of these types, you can wrap it in a `Supplier` — for example, `Supplier<IntStream>`.

Please note that a one-dimensional array of objects supplied as a set of "arguments" will be handled differently than other types of arguments. Specifically, all of the elements of a one-dimensional array of objects will be passed as individual physical arguments to the `@ParameterizedTest` method. See the Javadoc for `@FieldSource` for further details.

If you do not explicitly provide a field name via `@FieldSource`, JUnit Jupiter will search in the test class for a field that has the same name as the current `@ParameterizedTest` method by convention. This is demonstrated in the following example. This parameterized test method will be invoked twice: with the values "apple" and "banana".

```
@ParameterizedTest
@FieldSource
void arrayOfFruits(String fruit) {
    assertFruit(fruit);
}

static final String[] arrayOfFruits = { "apple", "banana" };
```

The following example demonstrates how to provide a single explicit field name via `@FieldSource`. This parameterized test method will be invoked twice: with the values "apple" and "banana".

```
@ParameterizedTest
@FieldSource("listOfFruits")
void singleFieldSource(String fruit) {
    assertFruit(fruit);
}

static final List<String> listOfFruits = Arrays.asList("apple", "banana");
```

The following example demonstrates how to provide multiple explicit field names via `@FieldSource`.

This example uses the `listOfFruits` field from the previous example as well as the `additionalFruits` field. Consequently, this parameterized test method will be invoked four times: with the values "apple", "banana", "cherry", and "dewberry".

```
@ParameterizedTest
@FieldSource({ "listOfFruits", "additionalFruits" })
void multipleFieldSources(String fruit) {
    assertFruit(fruit);
}

static final Collection<String> additionalFruits = Arrays.asList("cherry",
"dewberry");
```

It is also possible to provide a `Stream`, `DoubleStream`, `IntStream`, `LongStream`, or `Iterator` as the source of arguments via a `@FieldSource` field as long as the stream or iterator is wrapped in a `java.util.function.Supplier`. The following example demonstrates how to provide a `Supplier` of a `Stream` of named arguments. This parameterized test method will be invoked twice: with the values "apple" and "banana" and with display names `Apple` and `Banana`, respectively.

```
@ParameterizedTest
@FieldSource
void namedArgumentsSupplier(String fruit) {
    assertFruit(fruit);
}

static final Supplier<Stream<Arguments>> namedArgumentsSupplier = () -> Stream.of(
    arguments(named("Apple", "apple")),
    arguments(named("Banana", "banana"))
);
```



Note that `arguments(Object...)` is a static factory method defined in the `org.junit.jupiter.params.provider.Arguments` interface.

Similarly, `named(String, Object)` is a static factory method defined in the `org.junit.jupiter.api.Named` interface.

If a parameterized test method declares multiple parameters, the corresponding `@FieldSource` field must be able to provide a collection, stream supplier, or array of `Arguments` instances or object arrays as shown below (see the Javadoc for `@FieldSource` for further details on supported types).

```
@ParameterizedTest
@FieldSource("stringIntAndListArguments")
void testWithMultiArgFieldSource(String str, int num, List<String> list) {
    assertEquals(5, str.length());
    assertTrue(num >=1 && num <=2);
    assertEquals(2, list.size());
}
```

```
static List<Arguments> stringIntAndListArguments = Arrays.asList(
    arguments("apple", 1, Arrays.asList("a", "b")),
    arguments("lemon", 2, Arrays.asList("x", "y"))
);
```



Note that `arguments(Object...)` is a static factory method defined in the `org.junit.jupiter.params.provider.Arguments` interface.

An external, `static @FieldSource` field can be referenced by providing its *fully qualified field name* as demonstrated in the following example.

```
@ParameterizedTest
@FieldSource("example.FruitUtils#tropicalFruits")
void testWithExternalFieldSource(String tropicalFruit) {
    // test with tropicalFruit
}
```

@CsvSource

`@CsvSource` allows you to express argument lists as comma-separated values (i.e., CSV `String` literals). Each string provided via the `value` attribute in `@CsvSource` represents a CSV record and results in one invocation of the parameterized test. The first record may optionally be used to supply CSV headers (see the Javadoc for the `useHeadersInDisplayName` attribute for details and an example).

```
@ParameterizedTest
@CsvSource({
    "apple,      1",
    "banana,     2",
    "'lemon, lime', 0xF1",
    "strawberry, 700_000"
})
void testWithCsvSource(String fruit, int rank) {
    assertNotNull(fruit);
    assertNotEquals(0, rank);
}
```

The default delimiter is a comma (`,`), but you can use another character by setting the `delimiter` attribute. Alternatively, the `delimiterString` attribute allows you to use a `String` delimiter instead of a single character. However, both delimiter attributes cannot be set simultaneously.

By default, `@CsvSource` uses a single quote (`'`) as its quote character, but this can be changed via the `quoteCharacter` attribute. See the `'lemon, lime'` value in the example above and in the table below. An empty, quoted value (`' '`) results in an empty `String` unless the `emptyValue` attribute is set; whereas, an entirely *empty* value is interpreted as a `null` reference. By specifying one or more `nullValues`, a custom value can be interpreted as a `null` reference (see the `NIL` example in the table

below). An `ArgumentConversionException` is thrown if the target type of a `null` reference is a primitive type.



An *unquoted* empty value will always be converted to a `null` reference regardless of any custom values configured via the `nullValues` attribute.

Except within a quoted string, leading and trailing whitespace in a CSV column is trimmed by default. This behavior can be changed by setting the `ignoreLeadingAndTrailingWhitespace` attribute to `true`.

Example Input	Resulting Argument List
<code>@CsvSource({ "apple, banana" })</code>	<code>"apple", "banana"</code>
<code>@CsvSource({ "apple, 'lemon, lime'" })</code>	<code>"apple", "lemon, lime"</code>
<code>@CsvSource({ "apple, '" })</code>	<code>"apple", ""</code>
<code>@CsvSource({ "apple, " })</code>	<code>"apple", null</code>
<code>@CsvSource(value = { "apple, banana, NIL" }, nullValues = "NIL")</code>	<code>"apple", "banana", null</code>
<code>@CsvSource(value = { " apple , banana" }, ignoreLeadingAndTrailingWhitespace = false)</code>	<code>" apple ", " banana"</code>

If the programming language you are using supports *text blocks*—for example, Java SE 15 or higher—you can alternatively use the `textBlock` attribute of `@CsvSource`. Each record within a text block represents a CSV record and results in one invocation of the parameterized test. The first record may optionally be used to supply CSV headers by setting the `useHeadersInDisplayName` attribute to `true` as in the example below.

Using a text block, the previous example can be implemented as follows.

```
@ParameterizedTest(name = "[{index}] {arguments}")
@CsvSource(useHeadersInDisplayName = true, textBlock = """
    FRUIT,      RANK
    apple,      1
    banana,     2
    'lemon, lime', 0xF1
    strawberry, 700_000
    """)
void testWithCsvSource(String fruit, int rank) {
    // ...
}
```

The generated display names for the previous example include the CSV header names.

```
[1] FRUIT = apple, RANK = 1
[2] FRUIT = banana, RANK = 2
[3] FRUIT = lemon, lime, RANK = 0xF1
```

```
[4] FRUIT = strawberry, RANK = 700_000
```

In contrast to CSV records supplied via the `value` attribute, a text block can contain comments. Any line beginning with a `#` symbol will be treated as a comment and ignored. Note, however, that the `#` symbol must be the first character on the line without any leading whitespace. It is therefore recommended that the closing text block delimiter (`"""`) be placed either at the end of the last line of input or on the following line, left aligned with the rest of the input (as can be seen in the example below which demonstrates formatting similar to a table).

```
@ParameterizedTest
@CsvSource(delimiter = '|', quoteCharacter = '"', textBlock = """
#-----
#  FRUIT      |    RANK
#-----
#   apple     |     1
#-----
#   banana    |     2
#-----
#  "lemon lime" |    0xF1
#-----
#  strawberry  |   700_000
#-----
""")
void testWithCsvSource(String fruit, int rank) {
    // ...
}
```



Java's `text block` feature automatically removes *incidental whitespace* when the code is compiled. However other JVM languages such as Groovy and Kotlin do not. Thus, if you are using a programming language other than Java and your text block contains comments or new lines within quoted strings, you will need to ensure that there is no leading whitespace within your text block.

@CsvFileSource

`@CsvFileSource` lets you use comma-separated value (CSV) files from the classpath or the local file system. Each record from a CSV file results in one invocation of the parameterized test. The first record may optionally be used to supply CSV headers. You can instruct JUnit to ignore the headers via the `numLinesToSkip` attribute. If you would like for the headers to be used in the display names, you can set the `useHeadersInDisplayName` attribute to `true`. The examples below demonstrate the use of `numLinesToSkip` and `useHeadersInDisplayName`.

The default delimiter is a comma (`,`), but you can use another character by setting the `delimiter` attribute. Alternatively, the `delimiterString` attribute allows you to use a `String` delimiter instead of a single character. However, both delimiter attributes cannot be set simultaneously.



Comments in CSV files

Any line beginning with a # symbol will be interpreted as a comment and will be ignored.

```
@ParameterizedTest
@CsvFileSource(resources = "/two-column.csv", numLinesToSkip = 1)
void testWithCsvFileSourceFromClasspath(String country, int reference) {
    assertNotNull(country);
    assertEquals(0, reference);
}

@ParameterizedTest
@CsvFileSource(files = "src/test/resources/two-column.csv", numLinesToSkip = 1)
void testWithCsvFileSourceFromFile(String country, int reference) {
    assertNotNull(country);
    assertEquals(0, reference);
}

@ParameterizedTest(name = "[{index}] {arguments}")
@CsvFileSource(resources = "/two-column.csv", useHeadersInDisplayName = true)
void testWithCsvFileSourceAndHeaders(String country, int reference) {
    assertNotNull(country);
    assertEquals(0, reference);
}
```

two-column.csv

```
COUNTRY, REFERENCE
Sweden, 1
Poland, 2
"United States of America", 3
France, 700_000
```

The following listing shows the generated display names for the first two parameterized test methods above.

```
[1] country=Sweden, reference=1
[2] country=Poland, reference=2
[3] country=United States of America, reference=3
[4] country=France, reference=700_000
```

The following listing shows the generated display names for the last parameterized test method above that uses CSV header names.

```
[1] COUNTRY = Sweden, REFERENCE = 1
[2] COUNTRY = Poland, REFERENCE = 2
[3] COUNTRY = United States of America, REFERENCE = 3
```

```
[4] COUNTRY = France, REFERENCE = 700_000
```

In contrast to the default syntax used in `@CsvSource`, `@CsvFileSource` uses a double quote (") as the quote character by default, but this can be changed via the `quoteCharacter` attribute. See the "United States of America" value in the example above. An empty, quoted value (") results in an empty `String` unless the `emptyValue` attribute is set; whereas, an entirely *empty* value is interpreted as a `null` reference. By specifying one or more `nullValues`, a custom value can be interpreted as a `null` reference. An `ArgumentConversionException` is thrown if the target type of a `null` reference is a primitive type.



An *unquoted* empty value will always be converted to a `null` reference regardless of any custom values configured via the `nullValues` attribute.

Except within a quoted string, leading and trailing whitespace in a CSV column is trimmed by default. This behavior can be changed by setting the `ignoreLeadingAndTrailingWhitespace` attribute to `true`.

@ArgumentsSource

`@ArgumentsSource` can be used to specify a custom, reusable `ArgumentsProvider`. Note that an implementation of `ArgumentsProvider` must be declared as either a top-level class or as a `static` nested class.

```
@ParameterizedTest
@ArgumentsSource(MyArgumentsProvider.class)
void testWithArgumentsSource(String argument) {
    assertNotNull(argument);
}
```

```
public class MyArgumentsProvider implements ArgumentsProvider {

    @Override
    public Stream<? extends Arguments> provideArguments(ExtensionContext context) {
        return Stream.of("apple", "banana").map(Arguments::of);
    }
}
```

If you wish to implement a custom `ArgumentsProvider` that also consumes an annotation (like built-in providers such as `ValueArgumentsProvider` or `CsvArgumentsProvider`), you have the possibility to extend the `AnnotationBasedArgumentsProvider` class.

Moreover, `ArgumentsProvider` implementations may declare constructor parameters in case they need to be resolved by a registered `ParameterResolver` as demonstrated in the following example.

```
public class MyArgumentsProviderWithConstructorInjection implements ArgumentsProvider
{
```

```

private final TestInfo testInfo;

public MyArgumentsProviderWithConstructorInjection(TestInfo testInfo) {
    this.testInfo = testInfo;
}

@Override
public Stream<? extends Arguments> provideArguments(ExtensionContext context) {
    return Stream.of(Arguments.of(testInfo.getDisplayName()));
}
}

```

Multiple sources using repeatable annotations

Repeatable annotations provide a convenient way to specify multiple sources from different providers.

```

@DisplayName("A parameterized test that makes use of repeatable annotations")
@ParameterizedTest
@MethodSource("someProvider")
@MethodSource("otherProvider")
void testWithRepeatedAnnotation(String argument) {
    assertNotNull(argument);
}

static Stream<String> someProvider() {
    return Stream.of("foo");
}

static Stream<String> otherProvider() {
    return Stream.of("bar");
}

```

Following the above parameterized test, a test case will run for each argument:

```

[1] foo
[2] bar

```

The following annotations are repeatable:

- `@ValueSource`
- `@EnumSource`
- `@MethodSource`
- `@FieldSource`
- `@CsvSource`

- `@CsvFileSource`
- `@ArgumentsSource`

2.17.4. Argument Count Validation



Argument count validation is currently an *experimental* feature. You're invited to give it a try and provide feedback to the JUnit team so they can improve and eventually [promote](#) this feature.

By default, when an arguments source provides more arguments than the test method needs, those additional arguments are ignored and the test executes as usual. This can lead to bugs where arguments are never passed to the parameterized test method.

To prevent this, you can set argument count validation to 'strict'. Then, any additional arguments will cause an error instead.

To change this behavior for all tests, set the `junit.jupiter.params.argumentCountValidation` configuration parameter to `strict`. To change this behavior for a single test, use the `argumentCountValidation` attribute of the `@ParameterizedTest` annotation:

```
@ParameterizedTest(argumentCountValidation = ArgumentCountValidationMode.STRICT)
@CsvSource({ "42, -666" })
void testWithArgumentCountValidation(int number) {
    assertTrue(number > 0);
}
```

2.17.5. Argument Conversion

Widening Conversion

JUnit Jupiter supports [Widening Primitive Conversion](#) for arguments supplied to a `@ParameterizedTest`. For example, a parameterized test annotated with `@ValueSource(ints = { 1, 2, 3 })` can be declared to accept not only an argument of type `int` but also an argument of type `long`, `float`, or `double`.

Implicit Conversion

To support use cases like `@CsvSource`, JUnit Jupiter provides a number of built-in implicit type converters. The conversion process depends on the declared type of each method parameter.

For example, if a `@ParameterizedTest` declares a parameter of type `TimeUnit` and the actual type supplied by the declared source is a `String`, the string will be automatically converted into the corresponding `TimeUnit` enum constant.

```
@ParameterizedTest
@ValueSource(strings = "SECONDS")
void testWithImplicitArgumentConversion(ChronoUnit argument) {
```

```
assertNotNull(argument.name());
}
```

`String` instances are implicitly converted to the following target types.



Decimal, hexadecimal, and octal `String` literals will be converted to their integral types: `byte`, `short`, `int`, `long`, and their boxed counterparts.

Target Type	Example
boolean/Boolean	"true" → true (only accepts values 'true' or 'false', case-insensitive)
byte/Byte	"15", "0xF", or "017" → (byte) 15
char/Character	"o" → 'o'
short/Short	"15", "0xF", or "017" → (short) 15
int/Integer	"15", "0xF", or "017" → 15
long/Long	"15", "0xF", or "017" → 15L
float/Float	"1.0" → 1.0f
double/Double	"1.0" → 1.0d
Enum subclass	"SECONDS" → TimeUnit.SECONDS
java.io.File	"/path/to/file" → new File("/path/to/file")
java.lang.Class	"java.lang.Integer" → java.lang.Integer.class (use \$ for nested classes, e.g. "java.lang.Thread\$State")
java.lang.Class	"byte" → byte.class (primitive types are supported)
java.lang.Class	"char[]" → char[].class (array types are supported)
java.math.BigDecimal	"123.456e789" → new BigDecimal("123.456e789")
java.math.BigInteger	"1234567890123456789" → new BigInteger("1234567890123456789")
java.net.URI	"https://junit.org/" → URI.create("https://junit.org/")

Target Type	Example
<code>java.net.URL</code>	<code>"https://junit.org/" → URI.create("https://junit.org/").toURL()</code>
<code>java.nio.charset.Charset</code>	<code>"UTF-8" → Charset.forName("UTF-8")</code>
<code>java.nio.file.Path</code>	<code>"/path/to/file" → Paths.get("/path/to/file")</code>
<code>java.time.Duration</code>	<code>"PT3S" → Duration.ofSeconds(3)</code>
<code>java.time.Instant</code>	<code>"1970-01-01T00:00:00Z" → Instant.ofEpochMilli(0)</code>
<code>java.time.LocalDateTime</code>	<code>"2017-03-14T12:34:56.789" → LocalDateTime.of(2017, 3, 14, 12, 34, 56, 789_000_000)</code>
<code>java.time.LocalDate</code>	<code>"2017-03-14" → LocalDate.of(2017, 3, 14)</code>
<code>java.time.LocalTime</code>	<code>"12:34:56.789" → LocalTime.of(12, 34, 56, 789_000_000)</code>
<code>java.time.MonthDay</code>	<code>--03-14" → MonthDay.of(3, 14)</code>
<code>java.time.OffsetDateTime</code>	<code>"2017-03-14T12:34:56.789Z" → OffsetDateTime.of(2017, 3, 14, 12, 34, 56, 789_000_000, ZoneOffset.UTC)</code>
<code>java.time.OffsetTime</code>	<code>"12:34:56.789Z" → OffsetTime.of(12, 34, 56, 789_000_000, ZoneOffset.UTC)</code>
<code>java.time.Period</code>	<code>"P2M6D" → Period.of(0, 2, 6)</code>
<code>java.time.YearMonth</code>	<code>"2017-03" → YearMonth.of(2017, 3)</code>
<code>java.time.Year</code>	<code>"2017" → Year.of(2017)</code>
<code>java.time.ZonedDateTime</code>	<code>"2017-03-14T12:34:56.789Z" → ZonedDateTime.of(2017, 3, 14, 12, 34, 56, 789_000_000, ZoneOffset.UTC)</code>
<code>java.time.ZoneId</code>	<code>"Europe/Berlin" → ZoneId.of("Europe/Berlin")</code>
<code>java.time.ZoneOffset</code>	<code>"+02:30" → ZoneOffset.ofHoursMinutes(2, 30)</code>

Target Type	Example
java.util.Currency	"JPY" → Currency.getInstance("JPY")
java.util.Locale	"en" → new Locale("en")
java.util.UUID	"d043e930-7b3b-48e3-bdbe-5a3ccfb833db" → UUID.fromString("d043e930-7b3b-48e3-bdbe-5a3ccfb833db")

Fallback String-to-Object Conversion

In addition to implicit conversion from strings to the target types listed in the above table, JUnit Jupiter also provides a fallback mechanism for automatic conversion from a `String` to a given target type if the target type declares exactly one suitable *factory method* or a *factory constructor* as defined below.

- *factory method*: a non-private, `static` method declared in the target type that accepts a single `String` argument and returns an instance of the target type. The name of the method can be arbitrary and need not follow any particular convention.
- *factory constructor*: a non-private constructor in the target type that accepts a single `String` argument. Note that the target type must be declared as either a top-level class or as a `static` nested class.



If multiple *factory methods* are discovered, they will be ignored. If a *factory method* and a *factory constructor* are discovered, the factory method will be used instead of the constructor.

For example, in the following `@ParameterizedTest` method, the `Book` argument will be created by invoking the `Book.fromTitle(String)` factory method and passing "42 Cats" as the title of the book.

```
@ParameterizedTest
@ValueSource(strings = "42 Cats")
void testWithImplicitFallbackArgumentConversion(Book book) {
    assertEquals("42 Cats", book.getTitle());
}
```

```
public class Book {

    private final String title;

    private Book(String title) {
        this.title = title;
    }

    public static Book fromTitle(String title) {
        return new Book(title);
    }
}
```

```

    }

    public String getTitle() {
        return this.title;
    }
}

```

Explicit Conversion

Instead of relying on implicit argument conversion you may explicitly specify an `ArgumentConverter` to use for a certain parameter using the `@ConvertWith` annotation like in the following example. Note that an implementation of `ArgumentConverter` must be declared as either a top-level class or as a `static` nested class.

```

@ParameterizedTest
@EnumSource(ChronoUnit.class)
void testWithExplicitArgumentConversion(
    @ConvertWith(ToStringArgumentConverter.class) String argument) {

    assertNotNull(ChronoUnit.valueOf(argument));
}

```

```

public class ToStringArgumentConverter extends SimpleArgumentConverter {

    @Override
    protected Object convert(Object source, Class<?> targetType) {
        assertEquals(String.class, targetType, "Can only convert to String");
        if (source instanceof Enum<?>) {
            return ((Enum<?>) source).name();
        }
        return String.valueOf(source);
    }
}

```

If the converter is only meant to convert one type to another, you can extend `TypedArgumentConverter` to avoid boilerplate type checks.

```

public class ToLengthArgumentConverter extends TypedArgumentConverter<String, Integer>
{

    protected ToLengthArgumentConverter() {
        super(String.class, Integer.class);
    }

    @Override
    protected Integer convert(String source) {
        return (source != null ? source.length() : 0);
    }
}

```

```
}  
  
}
```

Explicit argument converters are meant to be implemented by test and extension authors. Thus, `junit-jupiter-params` only provides a single explicit argument converter that may also serve as a reference implementation: `JavaTimeArgumentConverter`. It is used via the composed annotation `JavaTimeConversionPattern`.

```
@ParameterizedTest  
@ValueSource(strings = { "01.01.2017", "31.12.2017" })  
void testWithExplicitJavaTimeConverter(  
    @JavaTimeConversionPattern("dd.MM.yyyy") LocalDate argument) {  
  
    assertEquals(2017, argument.getYear());  
}
```

If you wish to implement a custom `ArgumentConverter` that also consumes an annotation (like `JavaTimeArgumentConverter`), you have the possibility to extend the `AnnotationBasedArgumentConverter` class.

2.17.6. Argument Aggregation

By default, each *argument* provided to a `@ParameterizedTest` method corresponds to a single method parameter. Consequently, argument sources which are expected to supply a large number of arguments can lead to large method signatures.

In such cases, an `ArgumentsAccessor` can be used instead of multiple parameters. Using this API, you can access the provided arguments through a single argument passed to your test method. In addition, type conversion is supported as discussed in [Implicit Conversion](#).

Besides, you can retrieve the current test invocation index with `ArgumentsAccessor.getInvocationIndex()`.

```
@ParameterizedTest  
@CsvSource({  
    "Jane, Doe, F, 1990-05-20",  
    "John, Doe, M, 1990-10-22"  
})  
void testWithArgumentsAccessor(ArgumentsAccessor arguments) {  
    Person person = new Person(  
        arguments.getString(0),  
        arguments.getString(1),  
        arguments.get(2, Gender.class),  
        arguments.get(3, LocalDate.class));  
  
    if (person.getFirstName().equals("Jane")) {  
        assertEquals(Gender.F, person.getGender());  
    }  
}
```

```

    }
    else {
        assertEquals(Gender.M, person.getGender());
    }
    assertEquals("Doe", person.getLastName());
    assertEquals(1990, person.getDateOfBirth().getYear());
}

```

An instance of `ArgumentsAccessor` is automatically injected into any parameter of type `ArgumentsAccessor`.

Custom Aggregators

Apart from direct access to a `@ParameterizedTest` method's arguments using an `ArgumentsAccessor`, JUnit Jupiter also supports the usage of custom, reusable *aggregators*.

To use a custom aggregator, implement the `ArgumentsAggregator` interface and register it via the `@AggregateWith` annotation on a compatible parameter in the `@ParameterizedTest` method. The result of the aggregation will then be provided as an argument for the corresponding parameter when the parameterized test is invoked. Note that an implementation of `ArgumentsAggregator` must be declared as either a top-level class or as a `static` nested class.

```

@ParameterizedTest
@CsvSource({
    "Jane, Doe, F, 1990-05-20",
    "John, Doe, M, 1990-10-22"
})
void testWithArgumentsAggregator(@AggregateWith(PersonAggregator.class) Person person)
{
    // perform assertions against person
}

```

```

public class PersonAggregator implements ArgumentsAggregator {
    @Override
    public Person aggregateArguments(ArgumentsAccessor arguments, ParameterContext
context) {
        return new Person(
            arguments.getString(0),
            arguments.getString(1),
            arguments.get(2, Gender.class),
            arguments.get(3, LocalDate.class));
    }
}

```

If you find yourself repeatedly declaring `@AggregateWith(MyTypeAggregator.class)` for multiple parameterized test methods across your codebase, you may wish to create a custom *composed annotation* such as `@CsvToMyType` that is meta-annotated with

`@AggregateWith(MyTypeAggregator.class)`. The following example demonstrates this in action with a custom `@CsvToPerson` annotation.

```
@ParameterizedTest
@CsvSource({
    "Jane, Doe, F, 1990-05-20",
    "John, Doe, M, 1990-10-22"
})
void testWithCustomAggregatorAnnotation(@CsvToPerson Person person) {
    // perform assertions against person
}
```

```
@Retention(RetentionPolicy.RUNTIME)
@Target(ElementType.PARAMETER)
@AggregateWith(PersonAggregator.class)
public @interface CsvToPerson {
}
```

2.17.7. Customizing Display Names

By default, the display name of a parameterized test invocation contains the invocation index and the `String` representation of all arguments for that specific invocation. Each argument is preceded by its parameter name (unless the argument is only available via an `ArgumentsAccessor` or `ArgumentAggregator`), if the parameter name is present in the bytecode (for Java, test code must be compiled with the `-parameters` compiler flag).

However, you can customize invocation display names via the `name` attribute of the `@ParameterizedTest` annotation like in the following example.

```
@DisplayName("Display name of container")
@ParameterizedTest(name = "{index} ==> the rank of '{0}' is {1}")
@CsvSource({ "apple, 1", "banana, 2", "'lemon, lime', 3" })
void testWithCustomDisplayNames(String fruit, int rank) {
}
```

When executing the above method using the `ConsoleLauncher` you will see output similar to the following.

```
Display name of container ✓
├─ 1 ==> the rank of 'apple' is 1 ✓
├─ 2 ==> the rank of 'banana' is 2 ✓
└─ 3 ==> the rank of 'lemon, lime' is 3 ✓
```




Please note that `name` is a `MessageFormat` pattern. Thus, a single quote (') needs to be represented as a doubled single quote (') in order to be displayed.

The following placeholders are supported within custom display names.

Placeholder	Description
<code>{displayName}</code>	the display name of the method
<code>{index}</code>	the current invocation index (1-based)
<code>{arguments}</code>	the complete, comma-separated arguments list
<code>{argumentsWithNames}</code>	the complete, comma-separated arguments list with parameter names
<code>{argumentSetName}</code>	the name of the argument set
<code>{argumentSetNameOrArgumentsWithNames}</code>	<code>{argumentSetName}</code> or <code>{argumentsWithNames}</code> , depending on how the arguments are supplied
<code>{0}</code> , <code>{1}</code> , ...	an individual argument



When including arguments in display names, their string representations are truncated if they exceed the configured maximum length. The limit is configurable via the `junit.jupiter.params.displayname.argument.maxlength` configuration parameter and defaults to 512 characters.

When using `@MethodSource`, `@FieldSource`, or `@ArgumentsSource`, you can provide custom names for individual arguments or custom names for entire sets of arguments.

Use the `Named` API to provide a custom name for an individual argument, and the custom name will be used if the argument is included in the invocation display name, like in the example below.

```
@DisplayName("A parameterized test with named arguments")
@ParameterizedTest(name = "{index}: {0}")
@MethodSource("namedArguments")
void testWithNamedArguments(File file) {
}

static Stream<Arguments> namedArguments() {
    return Stream.of(
        arguments(named("An important file", new File("path1"))),
        arguments(named("Another file", new File("path2")))
    );
}
```

When executing the above method using the `ConsoleLauncher` you will see output similar to the following.

```
A parameterized test with named arguments ✓
├─ 1: An important file ✓
└─ 2: Another file ✓
```



Note that `arguments(Object...)` is a static factory method defined in the `org.junit.jupiter.params.provider.Arguments` interface.

Similarly, `named(String, Object)` is a static factory method defined in the `org.junit.jupiter.api.Named` interface.

Use the `ArgumentSet` API to provide a custom name for the entire set of arguments, and the custom name will be used as the display name, like in the example below.

```
@DisplayName("A parameterized test with named argument sets")
@ParameterizedTest
@FieldSource("argumentSets")
void testWithArgumentSets(File file1, File file2) {
}

static List<Arguments> argumentSets = Arrays.asList(
    argumentSet("Important files", new File("path1"), new File("path2")),
    argumentSet("Other files", new File("path3"), new File("path4"))
);
```

When executing the above method using the `ConsoleLauncher` you will see output similar to the following.

```
A parameterized test with named argument sets ✓
├─ [1] Important files ✓
└─ [2] Other files ✓
```



Note that `argumentSet(String, Object...)` is a static factory method defined in the `org.junit.jupiter.params.provider.Arguments` interface.

If you'd like to set a default name pattern for all parameterized tests in your project, you can declare the `junit.jupiter.params.displayname.default` configuration parameter in the `junit-platform.properties` file as demonstrated in the following example (see [Configuration Parameters](#) for other options).

```
junit.jupiter.params.displayname.default = {index}
```

The display name for a parameterized test is determined according to the following precedence

rules:

1. `name` attribute in `@ParameterizedTest`, if present
2. value of the `junit.jupiter.params.displayname.default` configuration parameter, if present
3. `DEFAULT_DISPLAY_NAME` constant defined in `@ParameterizedTest`

2.17.8. Lifecycle and Interoperability

Each invocation of a parameterized test has the same lifecycle as a regular `@Test` method. For example, `@BeforeEach` methods will be executed before each invocation. Similar to [Dynamic Tests](#), invocations will appear one by one in the test tree of an IDE. You may at will mix regular `@Test` methods and `@ParameterizedTest` methods within the same test class.

You may use `ParameterResolver` extensions with `@ParameterizedTest` methods. However, method parameters that are resolved by argument sources need to come first in the argument list. Since a test class may contain regular tests as well as parameterized tests with different parameter lists, values from argument sources are not resolved for lifecycle methods (e.g. `@BeforeEach`) and test class constructors.

```
@BeforeEach
void beforeEach(TestInfo testInfo) {
    // ...
}

@ParameterizedTest
@ValueSource(strings = "apple")
void testWithRegularParameterResolver(String argument, TestReporter testReporter) {
    testReporter.publishEntry("argument", argument);
}

@AfterEach
void afterEach(TestInfo testInfo) {
    // ...
}
```

2.18. Test Templates

A `@TestTemplate` method is not a regular test case but rather a template for test cases. As such, it is designed to be invoked multiple times depending on the number of invocation contexts returned by the registered providers. Thus, it must be used in conjunction with a registered `TestTemplateInvocationContextProvider` extension. Each invocation of a test template method behaves like the execution of a regular `@Test` method with full support for the same lifecycle callbacks and extensions. Please refer to [Providing Invocation Contexts for Test Templates](#) for usage examples.



[Repeated Tests](#) and [Parameterized Tests](#) are built-in specializations of test templates.

2.19. Dynamic Tests

The standard `@Test` annotation in JUnit Jupiter described in [Annotations](#) is very similar to the `@Test` annotation in JUnit 4. Both describe methods that implement test cases. These test cases are static in the sense that they are fully specified at compile time, and their behavior cannot be changed by anything happening at runtime. *Assumptions provide a basic form of dynamic behavior but are intentionally rather limited in their expressiveness.*

In addition to these standard tests a completely new kind of test programming model has been introduced in JUnit Jupiter. This new kind of test is a *dynamic test* which is generated at runtime by a factory method that is annotated with `@TestFactory`.

In contrast to `@Test` methods, a `@TestFactory` method is not itself a test case but rather a factory for test cases. Thus, a dynamic test is the product of a factory. Technically speaking, a `@TestFactory` method must return a single `DynamicNode` or a `Stream`, `Collection`, `Iterable`, `Iterator`, or array of `DynamicNode` instances. Instantiable subclasses of `DynamicNode` are `DynamicContainer` and `DynamicTest`. `DynamicContainer` instances are composed of a *display name* and a list of dynamic child nodes, enabling the creation of arbitrarily nested hierarchies of dynamic nodes. `DynamicTest` instances will be executed lazily, enabling dynamic and even non-deterministic generation of test cases.

Any `Stream` returned by a `@TestFactory` will be properly closed by calling `stream.close()`, making it safe to use a resource such as `Files.lines()`.

As with `@Test` methods, `@TestFactory` methods must not be `private` or `static` and may optionally declare parameters to be resolved by `ParameterResolvers`.

A `DynamicTest` is a test case generated at runtime. It is composed of a *display name* and an `Executable`. `Executable` is a `@FunctionalInterface` which means that the implementations of dynamic tests can be provided as *lambda expressions* or *method references*.

Dynamic Test Lifecycle



The execution lifecycle of a dynamic test is quite different than it is for a standard `@Test` case. Specifically, there are no lifecycle callbacks for individual dynamic tests. This means that `@BeforeEach` and `@AfterEach` methods and their corresponding extension callbacks are executed for the `@TestFactory` method but not for each *dynamic test*. In other words, if you access fields from the test instance within a lambda expression for a dynamic test, those fields will not be reset by callback methods or extensions between the execution of individual dynamic tests generated by the same `@TestFactory` method.

2.19.1. Dynamic Test Examples

The following `DynamicTestsDemo` class demonstrates several examples of test factories and dynamic tests.

The first method returns an invalid return type. Since an invalid return type cannot be detected at compile time, a `JUnitException` is thrown when it is detected at runtime.

The next six methods demonstrate the generation of a `Collection`, `Iterable`, `Iterator`, array, or

Stream of `DynamicTest` instances. Most of these examples do not really exhibit dynamic behavior but merely demonstrate the supported return types in principle. However, `dynamicTestsFromStream()` and `dynamicTestsFromIntStream()` demonstrate how to generate dynamic tests for a given set of strings or a range of input numbers.

The next method is truly dynamic in nature. `generateRandomNumberOfTests()` implements an `Iterator` that generates random numbers, a display name generator, and a test executor and then provides all three to `DynamicTest.stream()`. Although the non-deterministic behavior of `generateRandomNumberOfTests()` is of course in conflict with test repeatability and should thus be used with care, it serves to demonstrate the expressiveness and power of dynamic tests.

The next method is similar to `generateRandomNumberOfTests()` in terms of flexibility; however, `dynamicTestsFromStreamFactoryMethod()` generates a stream of dynamic tests from an existing `Stream` via the `DynamicTest.stream()` factory method.

For demonstration purposes, the `dynamicNodeSingleTest()` method generates a single `DynamicTest` instead of a stream, and the `dynamicNodeSingleContainer()` method generates a nested hierarchy of dynamic tests utilizing `DynamicContainer`.

```
import static example.util.StringUtils.isPalindrome;
import static org.junit.jupiter.api.Assertions.assertEquals;
import static org.junit.jupiter.api.Assertions.assertFalse;
import static org.junit.jupiter.api.Assertions.assertNotNull;
import static org.junit.jupiter.api.Assertions.assertTrue;
import static org.junit.jupiter.api.DynamicContainer.dynamicContainer;
import static org.junit.jupiter.api.DynamicTest.dynamicTest;

import java.util.Arrays;
import java.util.Collection;
import java.util.Iterator;
import java.util.List;
import java.util.Random;
import java.util.function.Function;
import java.util.stream.IntStream;
import java.util.stream.Stream;

import example.util.Calculator;

import org.junit.jupiter.api.DynamicNode;
import org.junit.jupiter.api.DynamicTest;
import org.junit.jupiter.api.Tag;
import org.junit.jupiter.api.TestFactory;
import org.junit.jupiter.api.function.ThrowingConsumer;

class DynamicTestsDemo {

    private final Calculator calculator = new Calculator();

    // This will result in a JUnitException!
    @TestFactory
```

```

List<String> dynamicTestsWithInvalidReturnType() {
    return Arrays.asList("Hello");
}

@TestFactory
Collection<DynamicTest> dynamicTestsFromCollection() {
    return Arrays.asList(
        dynamicTest("1st dynamic test", () -> assertTrue(isPalindrome("madam"))),
        dynamicTest("2nd dynamic test", () -> assertEquals(4, calculator.multiply
(2, 2)))
    );
}

@TestFactory
Iterable<DynamicTest> dynamicTestsFromIterable() {
    return Arrays.asList(
        dynamicTest("3rd dynamic test", () -> assertTrue(isPalindrome("madam"))),
        dynamicTest("4th dynamic test", () -> assertEquals(4, calculator.multiply
(2, 2)))
    );
}

@TestFactory
Iterator<DynamicTest> dynamicTestsFromIterator() {
    return Arrays.asList(
        dynamicTest("5th dynamic test", () -> assertTrue(isPalindrome("madam"))),
        dynamicTest("6th dynamic test", () -> assertEquals(4, calculator.multiply
(2, 2)))
    ).iterator();
}

@TestFactory
DynamicTest[] dynamicTestsFromArray() {
    return new DynamicTest[] {
        dynamicTest("7th dynamic test", () -> assertTrue(isPalindrome("madam"))),
        dynamicTest("8th dynamic test", () -> assertEquals(4, calculator.multiply
(2, 2)))
    };
}

@TestFactory
Stream<DynamicTest> dynamicTestsFromStream() {
    return Stream.of("racecar", "radar", "mom", "dad")
        .map(text -> dynamicTest(text, () -> assertTrue(isPalindrome(text))));
}

@TestFactory
Stream<DynamicTest> dynamicTestsFromIntStream() {
    // Generates tests for the first 10 even integers.
    return IntStream.iterate(0, n -> n + 2).limit(10)
        .mapToObj(n -> dynamicTest("test" + n, () -> assertEquals(0, n % 2)));
}

```

```

}

@TestFactory
Stream<DynamicTest> generateRandomNumberOfTests() {

    // Generates random positive integers between 0 and 100 until
    // a number evenly divisible by 7 is encountered.
    Iterator<Integer> inputGenerator = new Iterator<Integer>() {

        Random random = new Random();
        int current;

        @Override
        public boolean hasNext() {
            current = random.nextInt(100);
            return current % 7 != 0;
        }

        @Override
        public Integer next() {
            return current;
        }
    };

    // Generates display names like: input:5, input:37, input:85, etc.
    Function<Integer, String> displayNameGenerator = (input) -> "input:" + input;

    // Executes tests based on the current input value.
    ThrowingConsumer<Integer> testExecutor = (input) -> assertTrue(input % 7 !=
0);

    // Returns a stream of dynamic tests.
    return DynamicTest.stream(inputGenerator, displayNameGenerator, testExecutor);
}

@TestFactory
Stream<DynamicTest> dynamicTestsFromStreamFactoryMethod() {
    // Stream of palindromes to check
    Stream<String> inputStream = Stream.of("racecar", "radar", "mom", "dad");

    // Generates display names like: racecar is a palindrome
    Function<String, String> displayNameGenerator = text -> text + " is a
palindrome";

    // Executes tests based on the current input value.
    ThrowingConsumer<String> testExecutor = text -> assertTrue(isPalindrome(
text));

    // Returns a stream of dynamic tests.
    return DynamicTest.stream(inputStream, displayNameGenerator, testExecutor);
}

```

```

@TestFactory
Stream<DynamicNode> dynamicTestsWithContainers() {
    return Stream.of("A", "B", "C")
        .map(input -> dynamicContainer("Container " + input, Stream.of(
            dynamicTest("not null", () -> assertNotNull(input)),
            dynamicContainer("properties", Stream.of(
                dynamicTest("length > 0", () -> assertTrue(input.length() > 0)),
                dynamicTest("not empty", () -> assertFalse(input.isEmpty()))
            ))
        )));
}

@TestFactory
DynamicNode dynamicNodeSingleTest() {
    return dynamicTest("'pop' is a palindrome", () -> assertTrue(isPalindrome(
        "pop")));
}

@TestFactory
DynamicNode dynamicNodeSingleContainer() {
    return dynamicContainer("palindromes",
        Stream.of("racecar", "radar", "mom", "dad")
            .map(text -> dynamicTest(text, () -> assertTrue(isPalindrome(text)))
        ));
}
}

```

2.19.2. Dynamic Tests and Named

In some cases, it can be more natural to specify inputs together with a descriptive name using the [Named](#) API and the corresponding `stream()` factory methods on `DynamicTest` as shown in the first example below. The second example takes it one step further and allows to provide the code block that should be executed by implementing the `Executable` interface along with `Named` via the `NamedExecutable` base class.

```

import static example.util.StringUtils.isPalindrome;
import static org.junit.jupiter.api.Assertions.assertTrue;
import static org.junit.jupiter.api.Named.named;

import java.util.stream.Stream;

import org.junit.jupiter.api.DynamicTest;
import org.junit.jupiter.api.NamedExecutable;
import org.junit.jupiter.api.TestFactory;

public class DynamicTestsNamedDemo {

    @TestFactory

```



```

Stream<DynamicTest> dynamicTestsFromStreamFactoryMethodWithNames() {
    // Stream of palindromes to check
    var inputStream = Stream.of(
        named("racecar is a palindrome", "racecar"),
        named("radar is also a palindrome", "radar"),
        named("mom also seems to be a palindrome", "mom"),
        named("dad is yet another palindrome", "dad")
    );

    // Returns a stream of dynamic tests.
    return DynamicTest.stream(inputStream, text -> assertTrue(isPalindrome(
text))));
}

@TestFactory
Stream<DynamicTest> dynamicTestsFromStreamFactoryMethodWithNamedExecutables() {
    // Stream of palindromes to check
    var inputStream = Stream.of("racecar", "radar", "mom", "dad")
        .map(PalindromeNamedExecutable::new);

    // Returns a stream of dynamic tests based on NamedExecutables.
    return DynamicTest.stream(inputStream);
}

record PalindromeNamedExecutable(String text) implements NamedExecutable {

    @Override
    public String getName() {
        return String.format("%s' is a palindrome", text);
    }

    @Override
    public void execute() {
        assertTrue(isPalindrome(text));
    }
}
}

```

2.19.3. URI Test Sources for Dynamic Tests

The JUnit Platform provides `TestSource`, a representation of the source of a test or container used to navigate to its location by IDEs and build tools.

The `TestSource` for a dynamic test or dynamic container can be constructed from a `java.net.URI` which can be supplied via the `DynamicTest.dynamicTest(String, URI, Executable)` or `DynamicContainer.dynamicContainer(String, URI, Stream)` factory method, respectively. The `URI` will be converted to one of the following `TestSource` implementations.

`ClasspathResourceSource`

If the `URI` contains the `classpath` scheme — for example,

```
classpath:/test/foo.xml?line=20,column=2.
```

DirectorySource

If the `URI` represents a directory present in the file system.

FileSource

If the `URI` represents a file present in the file system.

MethodSource

If the `URI` contains the `method` scheme and the fully qualified method name (FQMN)—for example, `method:org.junit.Foo#bar(java.lang.String, java.lang.String[])`. Please refer to the [Javadoc for `DiscoverySelectors`](https://junit.org/junit5/docs/5.12.0-RC1/api/org.junit.platform.engine/org.junit.platform.engine/discovery/DiscoverySelectors.html#selectMethod(java.lang.String)[selectMethod]). [https://junit.org/junit5/docs/5.12.0-RC1/api/org.junit.platform.engine/org.junit.platform.engine/discovery/DiscoverySelectors.html#selectMethod\(java.lang.String\)\[selectMethod\]](https://junit.org/junit5/docs/5.12.0-RC1/api/org.junit.platform.engine/org.junit.platform.engine/discovery/DiscoverySelectors.html#selectMethod(java.lang.String)[selectMethod]) for the supported formats for a FQMN.

ClassSource

If the `URI` contains the `class` scheme and the fully qualified class name—for example, `class:org.junit.Foo?line=42`.

UriSource

If none of the above `TestSource` implementations are applicable.

2.20. Timeouts

The `@Timeout` annotation allows one to declare that a test, test factory, test template, or lifecycle method should fail if its execution time exceeds a given duration. The time unit for the duration defaults to seconds but is configurable.

The following example shows how `@Timeout` is applied to lifecycle and test methods.

```
class TimeoutDemo {

    @BeforeEach
    @Timeout(5)
    void setUp() {
        // fails if execution time exceeds 5 seconds
    }

    @Test
    @Timeout(value = 500, unit = TimeUnit.MILLISECONDS)
    void failsIfExecutionTimeExceeds500Milliseconds() {
        // fails if execution time exceeds 500 milliseconds
    }

    @Test
    @Timeout(value = 500, unit = TimeUnit.MILLISECONDS, threadMode = ThreadMode
.SEPARATE_THREAD)
    void failsIfExecutionTimeExceeds500MillisecondsInSeparateThread() {
        // fails if execution time exceeds 500 milliseconds, the test code is executed
    }
}
```

```
    in a separate thread
    }
}
}
```

To apply the same timeout to all test methods within a test class and all of its `@Nested` classes, you can declare the `@Timeout` annotation at the class level. It will then be applied to all test, test factory, and test template methods within that class and its `@Nested` classes unless overridden by a `@Timeout` annotation on a specific method or `@Nested` class. Please note that `@Timeout` annotations declared at the class level are not applied to lifecycle methods.

Declaring `@Timeout` on a `@TestFactory` method checks that the factory method returns within the specified duration but does not verify the execution time of each individual `DynamicTest` generated by the factory. Please use `assertTimeout()` or `assertTimeoutPreemptively()` for that purpose.

If `@Timeout` is present on a `@TestTemplate` method — for example, a `@RepeatedTest` or `@ParameterizedTest` — each invocation will have the given timeout applied to it.

2.20.1. Thread mode

The timeout can be applied using one of the following three thread modes: `SAME_THREAD`, `SEPARATE_THREAD`, or `INFERRED`.

When `SAME_THREAD` is used, the execution of the annotated method proceeds in the main thread of the test. If the timeout is exceeded, the main thread is interrupted from another thread. This is done to ensure interoperability with frameworks such as Spring that make use of mechanisms that are sensitive to the currently running thread — for example, `ThreadLocal` transaction management.

On the contrary when `SEPARATE_THREAD` is used, like the `assertTimeoutPreemptively()` assertion, the execution of the annotated method proceeds in a separate thread, this can lead to undesirable side effects, see [Preemptive Timeouts with `assertTimeoutPreemptively\(\)`](#).

When `INFERRED` (default) thread mode is used, the thread mode is resolved via the `junit.jupiter.execution.timeout.thread.mode.default` configuration parameter. If the provided configuration parameter is invalid or not present then `SAME_THREAD` is used as fallback.

2.20.2. Default Timeouts

The following [configuration parameters](#) can be used to specify default timeouts for all methods of a certain category unless they or an enclosing test class is annotated with `@Timeout`:

`junit.jupiter.execution.timeout.default`

Default timeout for all testable and lifecycle methods

`junit.jupiter.execution.timeout.testable.method.default`

Default timeout for all testable methods

`junit.jupiter.execution.timeout.test.method.default`

Default timeout for `@Test` methods

`junit.jupiter.execution.timeout.testtemplate.method.default`

Default timeout for `@TestTemplate` methods

`junit.jupiter.execution.timeout.testfactory.method.default`

Default timeout for `@TestFactory` methods

`junit.jupiter.execution.timeout.lifecycle.method.default`

Default timeout for all lifecycle methods

`junit.jupiter.execution.timeout.beforeall.method.default`

Default timeout for `@BeforeAll` methods

`junit.jupiter.execution.timeout.beforeeach.method.default`

Default timeout for `@BeforeEach` methods

`junit.jupiter.execution.timeout.aftereach.method.default`

Default timeout for `@AfterEach` methods

`junit.jupiter.execution.timeout.afterall.method.default`

Default timeout for `@AfterAll` methods

More specific configuration parameters override less specific ones. For example,

`junit.jupiter.execution.timeout.test.method.default`

overrides

`junit.jupiter.execution.timeout.testable.method.default`

which

overrides

`junit.jupiter.execution.timeout.default`.

The values of such configuration parameters must be in the following, case-insensitive format: `<number> [ns|μs|ms|s|m|h|d]`. The space between the number and the unit may be omitted. Specifying no unit is equivalent to using seconds.

Table 1. Example timeout configuration parameter values

Parameter value	Equivalent annotation
42	<code>@Timeout(42)</code>
42 ns	<code>@Timeout(value = 42, unit = NANoseconds)</code>
42 μs	<code>@Timeout(value = 42, unit = MICROseconds)</code>
42 ms	<code>@Timeout(value = 42, unit = MILLIseconds)</code>
42 s	<code>@Timeout(value = 42, unit = SECONDS)</code>
42 m	<code>@Timeout(value = 42, unit = MINUTES)</code>
42 h	<code>@Timeout(value = 42, unit = HOURS)</code>
42 d	<code>@Timeout(value = 42, unit = DAYS)</code>

2.20.3. Using `@Timeout` for Polling Tests

When dealing with asynchronous code, it is common to write tests that poll while waiting for something to happen before performing any assertions. In some cases you can rewrite the logic to use a `CountDownLatch` or another synchronization mechanism, but sometimes that is not possible —

for example, if the subject under test sends a message to a channel in an external message broker and assertions cannot be performed until the message has been successfully sent through the channel. Asynchronous tests like these require some form of timeout to ensure they don't hang the test suite by executing indefinitely, as would be the case if an asynchronous message never gets successfully delivered.

By configuring a timeout for an asynchronous test that polls, you can ensure that the test does not execute indefinitely. The following example demonstrates how to achieve this with JUnit Jupiter's `@Timeout` annotation. This technique can be used to implement "poll until" logic very easily.

```
@Test
@Timeout(5) // Poll at most 5 seconds
void pollUntil() throws InterruptedException {
    while (asynchronousResultNotAvailable()) {
        Thread.sleep(250); // custom poll interval
    }
    // Obtain the asynchronous result and perform assertions
}
```



If you need more control over polling intervals and greater flexibility with asynchronous tests, consider using a dedicated library such as [Awaitility](#).

2.20.4. Debugging Timeouts

Registered [Pre-Interrupt Callback](#) extensions are called prior to invoking `Thread.interrupt()` on the thread that is executing the timed out method. This allows to inspect the application state and output additional information that might be helpful for diagnosing the cause of a timeout.

Thread Dump on Timeout

JUnit registers a default implementation of the [Pre-Interrupt Callback](#) extension point that dumps the stacks of all threads to `System.out` if enabled by setting the `junit.jupiter.execution.timeout.threaddump.enabled` configuration parameter to `true`.

2.20.5. Disable @Timeout Globally

When stepping through your code in a debug session, a fixed timeout limit may influence the result of the test, e.g. mark the test as failed although all assertions were met.

JUnit Jupiter supports the `junit.jupiter.execution.timeout.mode` configuration parameter to configure when timeouts are applied. There are three modes: `enabled`, `disabled`, and `disabled_on_debug`. The default mode is `enabled`. A VM runtime is considered to run in debug mode when one of its input parameters starts with `-agentlib:jwp` or `-Xrunjwp`. This heuristic is queried by the `disabled_on_debug` mode.

2.21. Parallel Execution

By default, JUnit Jupiter tests are run sequentially in a single thread. Running tests in parallel — for example, to speed up execution — is available as an opt-in feature since version 5.3. To enable parallel execution, set the `junit.jupiter.execution.parallel.enabled` configuration parameter to `true` — for example, in `junit-platform.properties` (see [Configuration Parameters](#) for other options).

Please note that enabling this property is only the first step required to execute tests in parallel. If enabled, test classes and methods will still be executed sequentially by default. Whether or not a node in the test tree is executed concurrently is controlled by its execution mode. The following two modes are available.

SAME_THREAD

Force execution in the same thread used by the parent. For example, when used on a test method, the test method will be executed in the same thread as any `@BeforeAll` or `@AfterAll` methods of the containing test class.

CONCURRENT

Execute concurrently unless a resource lock forces execution in the same thread.

By default, nodes in the test tree use the `SAME_THREAD` execution mode. You can change the default by setting the `junit.jupiter.execution.parallel.mode.default` configuration parameter. Alternatively, you can use the `@Execution` annotation to change the execution mode for the annotated element and its subelements (if any) which allows you to activate parallel execution for individual test classes, one by one.

Configuration parameters to execute all tests in parallel

```
junit.jupiter.execution.parallel.enabled = true
junit.jupiter.execution.parallel.mode.default = concurrent
```

The default execution mode is applied to all nodes of the test tree with a few notable exceptions, namely test classes that use the `Lifecycle.PER_CLASS` mode or a `MethodOrderer`. In the former case, test authors have to ensure that the test class is thread-safe; in the latter, concurrent execution might conflict with the configured execution order. Thus, in both cases, test methods in such test classes are only executed concurrently if the `@Execution(CONCURRENT)` annotation is present on the test class or method.

When parallel execution is enabled and a default `ClassOrderer` is registered (see [Class Order](#) for details), top-level test classes will initially be sorted accordingly and scheduled in that order. However, they are not guaranteed to be started in exactly that order since the threads they are executed on are not controlled directly by JUnit.

All nodes of the test tree that are configured with the `CONCURRENT` execution mode will be executed fully in parallel according to the provided [configuration](#) while observing the declarative [synchronization](#) mechanism. Please note that [Capturing Standard Output/Error](#) needs to be enabled separately.

In addition, you can configure the default execution mode for top-level classes by setting the

`junit.jupiter.execution.parallel.mode.classes.default` configuration parameter. By combining both configuration parameters, you can configure classes to run in parallel but their methods in the same thread:

Configuration parameters to execute top-level classes in parallel but methods in same thread

```
junit.jupiter.execution.parallel.enabled = true
junit.jupiter.execution.parallel.mode.default = same_thread
junit.jupiter.execution.parallel.mode.classes.default = concurrent
```


The opposite combination will run all methods within one class in parallel, but top-level classes will run sequentially:

Configuration parameters to execute top-level classes sequentially but their methods in parallel

```
junit.jupiter.execution.parallel.enabled = true
junit.jupiter.execution.parallel.mode.default = concurrent
junit.jupiter.execution.parallel.mode.classes.default = same_thread
```

The following diagram illustrates how the execution of two top-level test classes **A** and **B** with two test methods per class behaves for all four combinations of `junit.jupiter.execution.parallel.mode.default` and `junit.jupiter.execution.parallel.mode.classes.default` (see labels in first column).

□ threads | time --

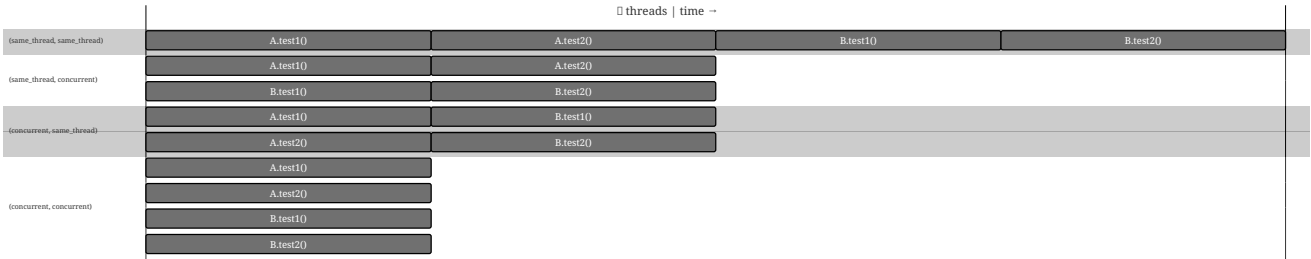

Default execution mode configuration combinations

If the `junit.jupiter.execution.parallel.mode.classes.default` configuration parameter is not explicitly set, the value for `junit.jupiter.execution.parallel.mode.default` will be used instead.

2.21.1. Configuration

Properties such as the desired parallelism and the maximum pool size can be configured using a [ParallelExecutionConfigurationStrategy](#). The JUnit Platform provides two implementations out of the box: `dynamic` and `fixed`. Alternatively, you may implement a `custom` strategy.

To select a strategy, set the `junit.jupiter.execution.parallel.config.strategy` configuration parameter to one of the following options.

`dynamic`

Computes the desired parallelism based on the number of available processors/cores multiplied by the `junit.jupiter.execution.parallel.config.dynamic.factor` configuration parameter (defaults to 1). The optional `junit.jupiter.execution.parallel.config.dynamic.max-pool-size-factor` configuration parameter can be used to limit the maximum number of threads.

`fixed`

Uses the mandatory `junit.jupiter.execution.parallel.config.fixed.parallelism` configuration parameter as the desired parallelism. The optional `junit.jupiter.execution.parallel.config.fixed.max-pool-size` configuration parameter can be used to limit the maximum number of threads.

`custom`

Allows you to specify a custom [ParallelExecutionConfigurationStrategy](#) implementation via the mandatory `junit.jupiter.execution.parallel.config.custom.class` configuration parameter to determine the desired configuration.

If no configuration strategy is set, JUnit Jupiter uses the `dynamic` configuration strategy with a factor of 1. Consequently, the desired parallelism will be equal to the number of available processors/cores.



Parallelism alone does not imply maximum number of concurrent threads

By default JUnit Jupiter does not guarantee that the number of concurrently executing tests will not exceed the configured parallelism. For example, when using one of the synchronization mechanisms described in the next section, the `ForkJoinPool` that is used behind the scenes may spawn additional threads to ensure execution continues with sufficient parallelism. If you require such guarantees, with Java 9+, it is possible to limit the maximum number of concurrent threads by controlling the maximum pool size of the `dynamic`, `fixed` and `custom` strategies.

Relevant properties

The following table lists relevant properties for configuring parallel execution. See [Configuration Parameters](#) for details on how to set such properties.

Property	Description	Supported Values	Default Value
<code>junit.jupiter.execution.parallel.enabled</code>	Enable parallel test execution	<ul style="list-style-type: none"> <code>true</code> <code>false</code> 	<code>false</code>
<code>junit.jupiter.execution.parallel.mode.default</code>	Default execution mode of nodes in the test tree	<ul style="list-style-type: none"> <code>concurrent</code> <code>same_thread</code> 	<code>same_thread</code>
<code>junit.jupiter.execution.parallel.mode.classes.default</code>	Default execution mode of top-level classes	<ul style="list-style-type: none"> <code>concurrent</code> <code>same_thread</code> 	<code>same_thread</code>
<code>junit.jupiter.execution.parallel.config.strategy</code>	Execution strategy for desired parallelism and maximum pool size	<ul style="list-style-type: none"> <code>dynamic</code> <code>fixed</code> <code>custom</code> 	<code>dynamic</code>
<code>junit.jupiter.execution.parallel.config.dynamic.factor</code>	Factor to be multiplied by the number of available processors/cores to determine the desired parallelism for the <code>dynamic</code> configuration strategy	a positive decimal number	<code>1.0</code>
<code>junit.jupiter.execution.parallel.config.dynamic.max-pool-size-factor</code>	Factor to be multiplied by the number of available processors/cores and the value of <code>junit.jupiter.execution.parallel.config.dynamic.factor</code> to determine the desired parallelism for the <code>dynamic</code> configuration strategy	a positive decimal number, must be greater than or equal to <code>1.0</code>	<code>256 + the value of <code>junit.jupiter.execution.parallel.config.dynamic.factor</code> multiplied by the number of available processors/cores</code>
<code>junit.jupiter.execution.parallel.config.dynamic.saturate</code>	Disable saturation of the underlying fork-join pool for the <code>dynamic</code> configuration strategy	<ul style="list-style-type: none"> <code>true</code> <code>false</code> 	<code>true</code>
<code>junit.jupiter.execution.parallel.config.fixed.parallelism</code>	Desired parallelism for the <code>fixed</code> configuration strategy	a positive integer	no default value
<code>junit.jupiter.execution.parallel.config.fixed.max-pool-size</code>	Desired maximum pool size of the underlying fork-join pool for the <code>fixed</code> configuration strategy	a positive integer, must be greater than or equal to <code>junit.jupiter.execution.parallel.config.fixed.parallelism</code>	<code>256 + the value of <code>junit.jupiter.execution.parallel.config.fixed.parallelism</code></code>

Property	Description	Supported Values	Default Value
<code>junit.jupiter.execution.parallel.config.fixed.saturate</code>	Disable saturation of the underlying fork-join pool for the <code>fixed</code> configuration strategy	<ul style="list-style-type: none"> <code>true</code> <code>false</code> 	<code>true</code>
<code>junit.jupiter.execution.parallel.config.custom.class</code>	Fully qualified class name of the <code>ParallelExecutionConfigurationStrategy</code> to be used for the <code>custom</code> configuration strategy	for example, <code>org.example.CustomStrategy</code>	no default value

2.21.2. Synchronization

In addition to controlling the execution mode using the `@Execution` annotation, JUnit Jupiter provides another annotation-based declarative synchronization mechanism. The `@ResourceLock` annotation allows you to declare that a test class or method uses a specific shared resource that requires synchronized access to ensure reliable test execution. The shared resource is identified by a unique name which is a `String`. The name can be user-defined or one of the predefined constants in `Resources`: `SYSTEM_PROPERTIES`, `SYSTEM_OUT`, `SYSTEM_ERR`, `LOCALE`, or `TIME_ZONE`.

In addition to declaring these shared resources statically, the `@ResourceLock` annotation has a `providers` attribute that allows registering implementations of the `ResourceLocksProvider` interface that can add shared resources dynamically at runtime. Note that resources declared statically with `@ResourceLock` annotation are combined with resources added dynamically by `ResourceLocksProvider` implementations.

If the tests in the following example were run in parallel *without* the use of `@ResourceLock`, they would be *flaky*. Sometimes they would pass, and at other times they would fail due to the inherent race condition of writing and then reading the same JVM System Property.

When access to shared resources is declared using the `@ResourceLock` annotation, the JUnit Jupiter engine uses this information to ensure that no conflicting tests are run in parallel. This guarantee extends to lifecycle methods of a test class or method. For example, if a test method is annotated with a `@ResourceLock` annotation, the "lock" will be acquired before any `@BeforeEach` methods are executed and released after all `@AfterEach` methods have been executed.

Running tests in isolation



If most of your test classes can be run in parallel without any synchronization but you have some test classes that need to run in isolation, you can mark the latter with the `@Isolated` annotation. Tests in such classes are executed sequentially without any other tests running at the same time.

In addition to the `String` that uniquely identifies the shared resource, you may specify an access mode. Two tests that require `READ` access to a shared resource may run in parallel with each other but not while any other test that requires `READ_WRITE` access to the same shared resource is running.

Declaring shared resources "statically" with @ResourceLock annotation

```
@Execution(CONCURRENT)
class StaticSharedResourcesDemo {

    private Properties backup;

    @BeforeEach
    void backup() {
        backup = new Properties();
        backup.putAll(System.getProperties());
    }

    @AfterEach
    void restore() {
        System.setProperties(backup);
    }

    @Test
    @ResourceLock(value = SYSTEM_PROPERTIES, mode = READ)
    void customPropertyIsNotSetByDefault() {
        assertNull(System.getProperty("my.prop"));
    }

    @Test
    @ResourceLock(value = SYSTEM_PROPERTIES, mode = READ_WRITE)
    void canSetCustomPropertyToApple() {
        System.setProperty("my.prop", "apple");
        assertEquals("apple", System.getProperty("my.prop"));
    }

    @Test
    @ResourceLock(value = SYSTEM_PROPERTIES, mode = READ_WRITE)
    void canSetCustomPropertyToBanana() {
        System.setProperty("my.prop", "banana");
        assertEquals("banana", System.getProperty("my.prop"));
    }
}
```

Adding shared resources "dynamically" with ResourceLocksProvider implementation

```
@Execution(CONCURRENT)
@ResourceLock(providers = DynamicSharedResourcesDemo.Provider.class)
class DynamicSharedResourcesDemo {

    private Properties backup;

    @BeforeEach
    void backup() {
```

```

        backup = new Properties();
        backup.putAll(System.getProperties());
    }

    @AfterEach
    void restore() {
        System.setProperties(backup);
    }

    @Test
    void customPropertyIsNotSetByDefault() {
        assertNull(System.getProperty("my.prop"));
    }

    @Test
    void canSetCustomPropertyToApple() {
        System.setProperty("my.prop", "apple");
        assertEquals("apple", System.getProperty("my.prop"));
    }

    @Test
    void canSetCustomPropertyToBanana() {
        System.setProperty("my.prop", "banana");
        assertEquals("banana", System.getProperty("my.prop"));
    }

    static class Provider implements ResourceLocksProvider {

        @Override
        public Set<Lock> provideForMethod(List<Class<?>> enclosingInstanceTypes,
            Class<?> testClass,
            Method testMethod) {
            ResourceAccessMode mode = testMethod.getName().startsWith("canSet") ?
            READ_WRITE : READ;
            return Collections.singleton(new Lock(SYSTEM_PROPERTIES, mode));
        }
    }
}

```

Also, "static" shared resources can be declared for *direct* child nodes via the `target` attribute in the `@ResourceLock` annotation, the attribute accepts a value from the `ResourceLockTarget` enum.

Specifying `target = CHILDREN` in a class-level `@ResourceLock` annotation has the same semantics as adding an annotation with the same `value` and `mode` to each test method and nested test class declared in this class.

This may improve parallelization when a test class declares a `READ` lock, but only a few methods hold a `READ_WRITE` lock.

Tests in the following example would run in the `SAME_THREAD` if the `@ResourceLock` didn't have `target = CHILDREN`. This is because the test class declares a `READ` shared resource, but one test method holds a `READ_WRITE` lock, which would force the `SAME_THREAD` execution mode for all the test methods.

Declaring shared resources for child nodes with `target` attribute

```
@Execution(CONCURRENT)
@ResourceLock(value = "a", mode = READ, target = CHILDREN)
public class ChildrenSharedResourcesDemo {

    @ResourceLock(value = "a", mode = READ_WRITE)
    @Test
    void test1() throws InterruptedException {
        Thread.sleep(2000L);
    }

    @Test
    void test2() throws InterruptedException {
        Thread.sleep(2000L);
    }

    @Test
    void test3() throws InterruptedException {
        Thread.sleep(2000L);
    }

    @Test
    void test4() throws InterruptedException {
        Thread.sleep(2000L);
    }

    @Test
    void test5() throws InterruptedException {
        Thread.sleep(2000L);
    }
}
```

2.22. Built-in Extensions

While the JUnit team encourages reusable extensions to be packaged and maintained in separate libraries, JUnit Jupiter includes a few user-facing extension implementations that are considered so generally useful that users shouldn't have to add another dependency.

2.22.1. The `@TempDir` Extension

The built-in `TempDirectory` extension is used to create and clean up a temporary directory for an individual test or all tests in a test class. It is registered by default. To use it, annotate a non-final, unassigned field of type `java.nio.file.Path` or `java.io.File` with `@TempDir` or add a parameter of

type `java.nio.file.Path` or `java.io.File` annotated with `@TempDir` to a test class constructor, lifecycle method, or test method.

For example, the following test declares a parameter annotated with `@TempDir` for a single test method, creates and writes to a file in the temporary directory, and checks its content.

A test method that requires a temporary directory

```
@Test
void writeItemsToFile(@TempDir Path tempDir) throws IOException {
    Path file = tempDir.resolve("test.txt");

    new ListWriter(file).write("a", "b", "c");

    assertEquals(singletonList("a,b,c"), Files.readAllLines(file));
}
```

You can inject multiple temporary directories by specifying multiple annotated parameters.

A test method that requires multiple temporary directories

```
@Test
void copyFileFromSourceToTarget(@TempDir Path source, @TempDir Path target) throws
IOException {
    Path sourceFile = source.resolve("test.txt");
    new ListWriter(sourceFile).write("a", "b", "c");

    Path targetFile = Files.copy(sourceFile, target.resolve("test.txt"));

    assertNotEquals(sourceFile, targetFile);
    assertEquals(singletonList("a,b,c"), Files.readAllLines(targetFile));
}
```



To revert to the old behavior of using a single temporary directory for the entire test class or method (depending on which level the annotation is used), you can set the `junit.jupiter.tempdir.scope` configuration parameter to `per_context`. However, please note that this option is deprecated and will be removed in a future release.

The following example stores a *shared* temporary directory in a `static` field. This allows the same `sharedTempDir` to be used in all lifecycle methods and test methods of the test class. For better isolation, you should use an instance field or constructor injection so that each test method uses a separate directory.

A test class that shares a temporary directory across test methods

```
class SharedTempDirectoryDemo {

    @TempDir
    static Path sharedTempDir;
```

```

@Test
void writeItemsToFile() throws IOException {
    Path file = sharedTempDir.resolve("test.txt");

    new ListWriter(file).write("a", "b", "c");

    assertEquals(singletonList("a,b,c"), Files.readAllLines(file));
}

@Test
void anotherTestThatUsesTheSameTempDir() {
    // use sharedTempDir
}
}

```

The `@TempDir` annotation has an optional `cleanup` attribute that can be set to either `NEVER`, `ON_SUCCESS`, or `ALWAYS`. If the cleanup mode is set to `NEVER`, the temporary directory will not be deleted after the test completes. If it is set to `ON_SUCCESS`, the temporary directory will only be deleted after the test if the test completed successfully.

The default cleanup mode is `ALWAYS`. You can use the `junit.jupiter.tempdir.cleanup.mode.default` configuration parameter to override this default.

A test class with a temporary directory that doesn't get cleaned up

```

class CleanupModeDemo {

    @Test
    void fileTest(@TempDir(cleanup = ON_SUCCESS) Path tempDir) {
        // perform test
    }

}

```

`@TempDir` supports the programmatic creation of temporary directories via the optional `factory` attribute. This is typically used to gain control over the temporary directory creation, like defining the parent directory or the file system that should be used.

Factories can be created by implementing `TempDirFactory`. Implementations must provide a no-args constructor and should not make any assumptions regarding when and how many times they are instantiated, but they can assume that their `createTempDirectory(...)` and `close()` methods will both be called once per instance, in this order, and from the same thread.

The default implementation available in Jupiter delegates directory creation to `java.nio.file.Files::createTempDirectory` which uses the default file system and the system's temporary directory as the parent directory. It passes `junit-` as the prefix string of the generated directory name to help identify it as a created by JUnit.

The following example defines a factory that uses the test name as the directory name prefix instead of the `junit` constant value.

A test class with a temporary directory having the test name as the directory name prefix

```
class TempDirFactoryDemo {

    @Test
    void factoryTest(@TempDir(factory = Factory.class) Path tempDir) {
        assertTrue(tempDir.getFileName().toString().startsWith("factoryTest"));
    }

    static class Factory implements TempDirFactory {

        @Override
        public Path createTempDirectory(AnnotatedElementContext elementContext,
            ExtensionContext extensionContext)
            throws IOException {
            return Files.createTempDirectory(extensionContext.getRequiredTestMethod
                ().getName());
        }

    }

}
```

It is also possible to use an in-memory file system like `Jimfs` for the creation of the temporary directory. The following example demonstrates how to achieve that.

A test class with a temporary directory created with the Jimfs in-memory file system

```
class InMemoryTempDirDemo {

    @Test
    void test(@TempDir(factory = JimfsTempDirFactory.class) Path tempDir) {
        // perform test
    }

    static class JimfsTempDirFactory implements TempDirFactory {

        private final FileSystem fileSystem = Jimfs.newFileSystem(Configuration.
            unix());

        @Override
        public Path createTempDirectory(AnnotatedElementContext elementContext,
            ExtensionContext extensionContext)
            throws IOException {
            return Files.createTempDirectory(fileSystem.getPath("/"), "junit-");
        }

    }

}
```

```

        @Override
        public void close() throws IOException {
            fileSystem.close();
        }
    }
}

```

`@TempDir` can also be used as a [meta-annotation](#) to reduce repetition. The following code listing shows how to create a custom `@JimfsTempDir` annotation that can be used as a drop-in replacement for `@TempDir(factory = JimfsTempDirFactory.class)`.

A custom annotation meta-annotated with `@TempDir`

```

@Target({ ElementType.ANNOTATION_TYPE, ElementType.FIELD, ElementType.PARAMETER })
@Retention(RetentionPolicy.RUNTIME)
@TempDir(factory = JimfsTempDirFactory.class)
@interface JimfsTempDir {
}

```

The following example demonstrates how to use the custom `@JimfsTempDir` annotation.

A test class using the custom annotation

```

class JimfsTempDirAnnotationDemo {

    @Test
    void test(@JimfsTempDir Path tempDir) {
        // perform test
    }
}

```

Meta-annotations or additional annotations on the field or parameter the `TempDir` annotation is declared on might expose additional attributes to configure the factory. Such annotations and related attributes can be accessed via the `AnnotatedElementContext` parameter of the `createTempDirectory(...)` method.

You can use the `junit.jupiter.tempdir.factory.default` [configuration parameter](#) to specify the fully qualified class name of the `TempDirFactory` you would like to use by default. Just like for factories configured via the `factory` attribute of the `@TempDir` annotation, the supplied class has to implement the `TempDirFactory` interface. The default factory will be used for all `@TempDir` annotations unless the `factory` attribute of the annotation specifies a different factory.

In summary, the factory for a temporary directory is determined according to the following precedence rules:

1. The `factory` attribute of the `@TempDir` annotation, if present

2. The default `TempDirFactory` configured via the configuration parameter, if present
3. Otherwise, `org.junit.jupiter.api.io.TempDirFactory$Standard` will be used.

2.22.2. The `@AutoClose` Extension

The built-in `AutoCloseExtension` automatically closes resources associated with fields. It is registered by default. To use it, annotate a field in a test class with `@AutoClose`.

`@AutoClose` fields may be either `static` or non-static. If the value of an `@AutoClose` field is `null` when it is evaluated the field will be ignored, but a warning message will be logged to inform you.

By default, `@AutoClose` expects the value of the annotated field to implement a `close()` method that will be invoked to close the resource. However, developers can customize the name of the close method via the `value` attribute. For example, `@AutoClose("shutdown")` instructs JUnit to look for a `shutdown()` method to close the resource.

`@AutoClose` fields are inherited from superclasses. Furthermore, `@AutoClose` fields from subclasses will be closed before `@AutoClose` fields in superclasses.

When multiple `@AutoClose` fields exist within a given test class, the order in which the resources are closed depends on an algorithm that is deterministic but intentionally nonobvious. This ensures that subsequent runs of a test suite close resources in the same order, thereby allowing for repeatable builds.

The `AutoCloseExtension` implements the `AfterAllCallback` and `TestInstancePreDestroyCallback` extension APIs. Consequently, a `static @AutoClose` field will be closed after all tests in the current test class have completed, effectively after `@AfterAll` methods have executed for the test class. A non-static `@AutoClose` field will be closed before the current test class instance is destroyed. Specifically, if the test class is configured with `@TestInstance(Lifecycle.PER_METHOD)` semantics, a non-static `@AutoClose` field will be closed after the execution of each test method, test factory method, or test template method. However, if the test class is configured with `@TestInstance(Lifecycle.PER_CLASS)` semantics, a non-static `@AutoClose` field will not be closed until the current test class instance is no longer needed, which means after `@AfterAll` methods and after all `static @AutoClose` fields have been closed.

The following example demonstrates how to annotate an instance field with `@AutoClose` so that the resource is automatically closed after test execution. In this example, we assume that the default `@TestInstance(Lifecycle.PER_METHOD)` semantics apply.

A test class using `@AutoClose` to close a resource

```
class AutoCloseDemo {  
  
    @AutoClose ①  
    WebClient webClient = new WebClient(); ②  
  
    String serverUrl = // specify server URL ...  
  
    @Test  
    void getProductList() {
```

```
        // Use WebClient to connect to web server and verify response
        assertEquals(200, webClient.get(serverUrl + "/products").getResponseStatus());
    }
}
```

- ① Annotate an instance field with `@AutoClose`.
- ② `WebClient` implements `java.lang.AutoCloseable` which defines a `close()` method that will be invoked after each `@Test` method.

3. Migrating from JUnit 4

Although the JUnit Jupiter programming model and extension model do not support JUnit 4 features such as `Rules` and `Runners` natively, it is not expected that source code maintainers will need to update all of their existing tests, test extensions, and custom build test infrastructure to migrate to JUnit Jupiter.

Instead, JUnit provides a gentle migration path via a *JUnit Vintage test engine* which allows existing tests based on JUnit 3 and JUnit 4 to be executed using the JUnit Platform infrastructure. Since all classes and annotations specific to JUnit Jupiter reside under the `org.junit.jupiter` base package, having both JUnit 4 and JUnit Jupiter in the classpath does not lead to any conflicts. It is therefore safe to maintain existing JUnit 4 tests alongside JUnit Jupiter tests. Furthermore, since the JUnit team will continue to provide maintenance and bug fix releases for the JUnit 4.x baseline, developers have plenty of time to migrate to JUnit Jupiter on their own schedule.

3.1. Running JUnit 4 Tests on the JUnit Platform

Make sure that the `junit-vintage-engine` artifact is in your test runtime path. In that case JUnit 3 and JUnit 4 tests will automatically be picked up by the JUnit Platform launcher.

See the example projects in the `junit5-samples` repository to find out how this is done with Gradle and Maven.

3.1.1. Categories Support

For test classes or methods that are annotated with `@Category`, the *JUnit Vintage test engine* exposes the category's fully qualified class name as a `tag` for the corresponding test class or test method. For example, if a test method is annotated with `@Category(Example.class)`, it will be tagged with `"com.acme.Example"`. Similar to the `Categories` runner in JUnit 4, this information can be used to filter the discovered tests before executing them (see [Running Tests](#) for details).

3.2. Parallel Execution

The JUnit Vintage test engine supports parallel execution of top-level test classes, allowing existing JUnit 3 and JUnit 4 tests to benefit from improved performance through concurrent test execution. It can be enabled and configured using the following [configuration parameters](#):

`junit.vintage.execution.parallel.enabled=true|false`

Enable/disable parallel execution (defaults to `false`).

`junit.vintage.execution.parallel.pool-size=<number>`

Specifies the size of the thread pool to be used for parallel execution. By default, the number of available processors is used.

Example configuration in `junit-platform.properties`:

```
junit.vintage.execution.parallel.enabled=true
junit.vintage.execution.parallel.pool-size=4
```

With these properties set, the `VintageTestEngine` will execute tests in parallel, potentially significantly reducing the overall test suite execution time.

3.3. Migration Tips

The following are topics that you should be aware of when migrating existing JUnit 4 tests to JUnit Jupiter.

- Annotations reside in the `org.junit.jupiter.api` package.
- Assertions reside in `org.junit.jupiter.api.Assertions`.
 - Note that you may continue to use assertion methods from `org.junit.Assert` or any other assertion library such as `AssertJ`, `Hamcrest`, `Truth`, etc.
- Assumptions reside in `org.junit.jupiter.api.Assumptions`.
 - Note that JUnit Jupiter 5.4 and later versions support methods from JUnit 4's `org.junit.Assume` class for assumptions. Specifically, JUnit Jupiter supports JUnit 4's `AssumptionViolatedException` to signal that a test should be aborted instead of marked as a failure.
- `@Before` and `@After` no longer exist; use `@BeforeEach` and `@AfterEach` instead.
- `@BeforeClass` and `@AfterClass` no longer exist; use `@BeforeAll` and `@AfterAll` instead.
- `@Ignore` no longer exists: use `@Disabled` or one of the other built-in [execution conditions](#) instead
 - See also [JUnit 4 @Ignore Support](#).
- `@Category` no longer exists; use `@Tag` instead.
- `@RunWith` no longer exists; superseded by `@ExtendWith`.
- `@Rule` and `@ClassRule` no longer exist; superseded by `@ExtendWith` and `@RegisterExtension`.
 - See also [Limited JUnit 4 Rule Support](#).
- `@Test(expected = ...)` and the `ExpectedException` rule no longer exist; use `Assertions.assertThrows(...)` instead.
 - See [Limited JUnit 4 Rule Support](#) if you still need to use `ExpectedException`.
- Assertions and assumptions in JUnit Jupiter accept the failure message as their last argument

instead of the first one.

- See [Failure Message Arguments](#) for details.

3.4. Limited JUnit 4 Rule Support

As stated above, JUnit Jupiter does not and will not support JUnit 4 rules natively. The JUnit team realizes, however, that many organizations, especially large ones, are likely to have large JUnit 4 code bases that make use of custom rules. To serve these organizations and enable a gradual migration path the JUnit team has decided to support a selection of JUnit 4 rules verbatim within JUnit Jupiter. This support is based on adapters and is limited to those rules that are semantically compatible to the JUnit Jupiter extension model, i.e. those that do not completely change the overall execution flow of the test.

The `junit-jupiter-migrationsupport` module from JUnit Jupiter currently supports the following three `Rule` types including subclasses of these types:

- `org.junit.rules.ExternalResource` (including `org.junit.rules.TemporaryFolder`)
- `org.junit.rules.Verifier` (including `org.junit.rules.ErrorCollector`)
- `org.junit.rules.ExpectedException`

As in JUnit 4, Rule-annotated fields as well as methods are supported. By using these class-level extensions on a test class such `Rule` implementations in legacy code bases can be *left unchanged* including the JUnit 4 rule import statements.

This limited form of `Rule` support can be switched on by the class-level annotation `@EnableRuleMigrationSupport`. This annotation is a *composed annotation* which enables all rule migration support extensions: `VerifierSupport`, `ExternalResourceSupport`, and `ExpectedExceptionSupport`. You may alternatively choose to annotate your test class with `@EnableJUnit4MigrationSupport` which registers migration support for rules *and* JUnit 4's `@Ignore` annotation (see [JUnit 4 @Ignore Support](#)).

However, if you intend to develop a new extension for JUnit Jupiter please use the new extension model of JUnit Jupiter instead of the rule-based model of JUnit 4.

3.5. JUnit 4 @Ignore Support

In order to provide a smooth migration path from JUnit 4 to JUnit Jupiter, the `junit-jupiter-migrationsupport` module provides support for JUnit 4's `@Ignore` annotation analogous to Jupiter's `@Disabled` annotation.

To use `@Ignore` with JUnit Jupiter based tests, configure a *test* dependency on the `junit-jupiter-migrationsupport` module in your build and then annotate your test class with `@ExtendWith(IgnoreCondition.class)` or `@EnableJUnit4MigrationSupport` (which automatically registers the `IgnoreCondition` along with [Limited JUnit 4 Rule Support](#)). The `IgnoreCondition` is an `ExecutionCondition` that disables test classes or test methods that are annotated with `@Ignore`.

```
import org.junit.Ignore;
```

```

import org.junit.jupiter.api.Test;
import org.junit.jupiter.migrationsupport.EnableJUnit4MigrationSupport;

// @ExtendWith(IgnoreCondition.class)
@EnableJUnit4MigrationSupport
class IgnoredTestsDemo {

    @Ignore
    @Test
    void testWillBeIgnored() {
    }

    @Test
    void testWillBeExecuted() {
    }
}

```

3.6. Failure Message Arguments

The `Assumptions` and `Assertions` classes in JUnit Jupiter declare arguments in a different order than in JUnit 4. In JUnit 4 assertion and assumption methods accept the failure message as the first argument; whereas, in JUnit Jupiter assertion and assumption methods accept the failure message as the last argument.

For instance, the method `assertEquals` in JUnit 4 is declared as `assertEquals(String message, Object expected, Object actual)`, but in JUnit Jupiter it is declared as `assertEquals(Object expected, Object actual, String message)`. The rationale for this is that a failure message is *optional*, and optional arguments should be declared after required arguments in a method signature.

The methods affected by this change are the following:

- Assertions
 - `assertTrue`
 - `assertFalse`
 - `assertNull`
 - `assertNotNull`
 - `assertEquals`
 - `assertNotEquals`
 - `assertArrayEquals`
 - `assertSame`
 - `assertNotSame`
 - `assertThrows`
- Assumptions
 - `assumeTrue`

- `assumeFalse`

4. Running Tests

4.1. IDE Support

4.1.1. IntelliJ IDEA

IntelliJ IDEA supports running tests on the JUnit Platform since version 2016.2. For more information, please consult this [IntelliJ IDEA resource](#). Note, however, that it is recommended to use IDEA 2017.3 or newer since more recent versions of IDEA download the following JARs automatically based on the API version used in the project: `junit-platform-launcher`, `junit-jupiter-engine`, and `junit-vintage-engine`.



IntelliJ IDEA releases prior to IDEA 2017.3 bundle specific versions of JUnit 5. Thus, if you want to use a newer version of JUnit Jupiter, execution of tests within the IDE might fail due to version conflicts. In such cases, please follow the instructions below to use a newer version of JUnit 5 than the one bundled with IntelliJ IDEA.

In order to use a different JUnit 5 version (e.g., 5.12.0-RC1), you may need to include the corresponding versions of the `junit-platform-launcher`, `junit-jupiter-engine`, and `junit-vintage-engine` JARs in the classpath.

Additional Gradle Dependencies

```
testImplementation(platform("org.junit:junit-bom:5.12.0-RC1"))
testRuntimeOnly("org.junit.platform:junit-platform-launcher") {
    because("Only needed to run tests in a version of IntelliJ IDEA that bundles older
versions")
}
testRuntimeOnly("org.junit.jupiter:junit-jupiter-engine")
testRuntimeOnly("org.junit.vintage:junit-vintage-engine")
```

Additional Maven Dependencies

```
<!-- ... -->
<dependencies>
  <!-- Only needed to run tests in a version of IntelliJ IDEA that bundles older
versions -->
  <dependency>
    <groupId>org.junit.platform</groupId>
    <artifactId>junit-platform-launcher</artifactId>
    <scope>test</scope>
  </dependency>
  <dependency>
    <groupId>org.junit.jupiter</groupId>
    <artifactId>junit-jupiter-engine</artifactId>
    <scope>test</scope>
```



```
</dependency>
<dependency>
  <groupId>org.junit.vintage</groupId>
  <artifactId>junit-vintage-engine</artifactId>
  <scope>test</scope>
</dependency>
</dependencies>
<dependencyManagement>
  <dependencies>
    <dependency>
      <groupId>org.junit</groupId>
      <artifactId>junit-bom</artifactId>
      <version>5.12.0-RC1</version>
      <type>pom</type>
      <scope>import</scope>
    </dependency>
  </dependencies>
</dependencyManagement>
```

4.1.2. Eclipse

Eclipse IDE offers support for the JUnit Platform since the Eclipse Oxygen.1a (4.7.1a) release.

For more information on using JUnit 5 in Eclipse consult the official *Eclipse support for JUnit 5* section of the [Eclipse Project Oxygen.1a \(4.7.1a\) - New and Noteworthy](#) documentation.

4.1.3. NetBeans

NetBeans offers support for JUnit Jupiter and the JUnit Platform since the [Apache NetBeans 10.0 release](#).

For more information consult the JUnit 5 section of the [Apache NetBeans 10.0 release notes](#).

4.1.4. Visual Studio Code

[Visual Studio Code](#) supports JUnit Jupiter and the JUnit Platform via the [Java Test Runner](#) extension which is installed by default as part of the [Java Extension Pack](#).

For more information consult the *Testing* section of the [Java in Visual Studio Code](#) documentation.

4.1.5. Other IDEs

If you are using an editor or IDE other than one of those listed in the previous sections, the JUnit team provides two alternative solutions to assist you in using JUnit 5. You can use the [Console Launcher](#) manually — for example, from the command line — or execute tests with a [JUnit 4 based Runner](#) if your IDE has built-in support for JUnit 4.

4.2. Build Support

4.2.1. Gradle

Starting with [version 4.6](#), Gradle provides [native support](#) for executing tests on the JUnit Platform. To enable it, you need to specify `useJUnitPlatform()` within a `test` task declaration in `build.gradle`:

```
test {
    useJUnitPlatform()
}
```

Filtering by [tags](#), [tag expressions](#), or engines is also supported:

```
test {
    useJUnitPlatform {
        includeTags("fast", "smoke & feature-a")
        // excludeTags("slow", "ci")
        includeEngines("junit-jupiter")
        // excludeEngines("junit-vintage")
    }
}
```

Please refer to the [official Gradle documentation](#) for a comprehensive list of options.

Aligning dependency versions

Unless you're using Spring Boot which defines its own way of managing dependencies, it is recommended to use the JUnit Platform BOM to align the versions of all JUnit 5 artifacts.

```
dependencies {
    testImplementation(platform("org.junit:junit-bom:5.12.0-RC1"))
}
```

Using the BOM allows you to omit the version when declaring dependencies on all artifacts with the `org.junit.platform`, `org.junit.jupiter`, and `org.junit.vintage` group IDs.



See [Spring Boot](#) for details on how to override the version of JUnit used in your Spring Boot application.

Configuration Parameters

The standard Gradle `test` task currently does not provide a dedicated DSL to set JUnit Platform [configuration parameters](#) to influence test discovery and execution. However, you can provide configuration parameters within the build script via system properties (as shown below) or via the `junit-platform.properties` file.

```

test {
    // ...
    systemProperty("junit.jupiter.conditions.deactivate", "*")
    systemProperty("junit.jupiter.extensions.autodetection.enabled", true)
    systemProperty("junit.jupiter.testinstance.lifecycle.default", "per_class")
    // ...
}

```

Configuring Test Engines

In order to run any tests at all, a `TestEngine` implementation must be on the classpath.

To configure support for JUnit Jupiter based tests, configure a `testImplementation` dependency on the dependency-aggregating JUnit Jupiter artifact similar to the following.

```

dependencies {
    testImplementation("org.junit.jupiter:junit-jupiter:5.12.0-RC1") // version can be
    omitted when using the BOM
}

```

The JUnit Platform can run JUnit 4 based tests as long as you configure a `testImplementation` dependency on JUnit 4 and a `testRuntimeOnly` dependency on the JUnit Vintage `TestEngine` implementation similar to the following.

```

dependencies {
    testImplementation("junit:junit:4.13.2")
    testRuntimeOnly("org.junit.vintage:junit-vintage-engine:5.12.0-RC1") // version
    can be omitted when using the BOM
}

```

Configuring Logging (optional)

JUnit uses the Java Logging APIs in the `java.util.logging` package (a.k.a. *JUL*) to emit warnings and debug information. Please refer to the official documentation of `LogManager` for configuration options.

Alternatively, it's possible to redirect log messages to other logging frameworks such as `Log4j` or `Logback`. To use a logging framework that provides a custom implementation of `LogManager`, set the `java.util.logging.manager` system property to the *fully qualified class name* of the `LogManager` implementation to use. The example below demonstrates how to configure `Log4j 2.x` (see `Log4j JDK Logging Adapter` for details).

```

test {
    systemProperty("java.util.logging.manager",
"org.apache.logging.log4j.jul.LogManager")
    // Avoid overhead (see

```

```
https://logging.apache.org/log4j/2.x/manual/jmx.html#enabling-jmx)
    systemProperty("log4j2.disableJmx", "true")
}
```

Other logging frameworks provide different means to redirect messages logged using `java.util.logging`. For example, for [Logback](#) you can use the [JUL to SLF4J Bridge](#) by adding an additional dependency to the runtime classpath.

4.2.2. Maven

Maven Surefire and Maven Failsafe provide [native support](#) for executing tests on the JUnit Platform. The `pom.xml` file in the `junit5-jupiter-starter-maven` project demonstrates how to use the Maven Surefire plugin and can serve as a starting point for configuring your Maven build.

Use recent version of Maven Surefire/Failsafe to avoid interoperability issues

To avoid interoperability issues, it is recommended to use a recent version of Maven Surefire/Failsafe (3.0.0 or later) because it automatically aligns the version of the JUnit Platform Launcher that is used with the JUnit Platform version found on the test runtime classpath.

If you are using a version older than 3.0.0-M4, you can work around the missing alignment by adding a test dependency on the matching version of the JUnit Platform Launcher to your Maven build as follows.



```
<dependency>
  <groupId>org.junit.platform</groupId>
  <artifactId>junit-platform-launcher</artifactId>
  <version>1.12.0-RC1</version>
  <scope>test</scope>
</dependency>
```

Aligning dependency versions

Unless you're using Spring Boot which defines its own way of managing dependencies, it is recommended to use the JUnit Platform BOM to align the versions of all JUnit 5 artifacts.

```
<dependencyManagement>
  <dependencies>
    <dependency>
      <groupId>org.junit</groupId>
      <artifactId>junit-bom</artifactId>
      <version>5.12.0-RC1</version>
      <type>pom</type>
      <scope>import</scope>
    </dependency>
  </dependencies>
```

```
</dependencyManagement>
```

Using the BOM allows you to omit the version when declaring dependencies on all artifacts with the `org.junit.platform`, `org.junit.jupiter`, and `org.junit.vintage` group IDs.



See [Spring Boot](#) for details on how to override the version of JUnit used in your Spring Boot application.

Configuring Test Engines

In order to have Maven Surefire or Maven Failsafe run any tests at all, at least one `TestEngine` implementation must be added to the test classpath.

To configure support for JUnit Jupiter based tests, configure `test` scoped dependencies on the JUnit Jupiter API and the JUnit Jupiter `TestEngine` implementation similar to the following.

```
<!-- ... -->
<dependencies>
  <!-- ... -->
  <dependency>
    <groupId>org.junit.jupiter</groupId>
    <artifactId>junit-jupiter</artifactId>
    <version>5.12.0-RC1</version> <!-- can be omitted when using the BOM -->
    <scope>test</scope>
  </dependency>
  <!-- ... -->
</dependencies>
<build>
  <plugins>
    <plugin>
      <artifactId>maven-surefire-plugin</artifactId>
      <version>3.5.2</version>
    </plugin>
    <plugin>
      <artifactId>maven-failsafe-plugin</artifactId>
      <version>3.5.2</version>
    </plugin>
  </plugins>
</build>
<!-- ... -->
```

Maven Surefire and Maven Failsafe can run JUnit 4 based tests alongside Jupiter tests as long as you configure `test` scoped dependencies on JUnit 4 and the JUnit Vintage `TestEngine` implementation similar to the following.

```
<!-- ... -->
<dependencies>
  <!-- ... -->
```

```

<dependency>
  <groupId>junit</groupId>
  <artifactId>junit</artifactId>
  <version>4.13.2</version>
  <scope>test</scope>
</dependency>
<dependency>
  <groupId>org.junit.vintage</groupId>
  <artifactId>junit-vintage-engine</artifactId>
  <version>5.12.0-RC1</version> <!-- can be omitted when using the BOM -->
  <scope>test</scope>
</dependency>
<!-- ... -->
</dependencies>
<!-- ... -->
<build>
  <plugins>
    <plugin>
      <artifactId>maven-surefire-plugin</artifactId>
      <version>3.5.2</version>
    </plugin>
    <plugin>
      <artifactId>maven-failsafe-plugin</artifactId>
      <version>3.5.2</version>
    </plugin>
  </plugins>
</build>
<!-- ... -->

```

Filtering by Test Class Names

The Maven Surefire Plugin will scan for test classes whose fully qualified names match the following patterns.

- `**/Test*.java`
- `**/*Test.java`
- `**/*Tests.java`
- `**/*TestCase.java`

Moreover, it will exclude all nested classes (including static member classes) by default.

Note, however, that you can override this default behavior by configuring explicit `include` and `exclude` rules in your `pom.xml` file. For example, to keep Maven Surefire from excluding static member classes, you can override its exclude rules as follows.

Overriding exclude rules of Maven Surefire

```

<!-- ... -->
<build>

```

```

<plugins>
  <plugin>
    <artifactId>maven-surefire-plugin</artifactId>
    <version>3.5.2</version>
    <configuration>
      <excludes>
        <exclude/>
      </excludes>
    </configuration>
  </plugin>
</plugins>
</build>
<!-- ... -->

```

Please see the [Inclusions and Exclusions of Tests](#) documentation for Maven Surefire for details.

Filtering by Tags

You can filter tests by [tags](#) or [tag expressions](#) using the following configuration properties.

- to include *tags* or *tag expressions*, use **groups**.
- to exclude *tags* or *tag expressions*, use **excludedGroups**.

```

<!-- ... -->
<build>
  <plugins>
    <plugin>
      <artifactId>maven-surefire-plugin</artifactId>
      <version>3.5.2</version>
      <configuration>
        <groups>acceptance | !feature-a</groups>
        <excludedGroups>integration, regression</excludedGroups>
      </configuration>
    </plugin>
  </plugins>
</build>
<!-- ... -->

```

Configuration Parameters

You can set JUnit Platform [configuration parameters](#) to influence test discovery and execution by declaring the **configurationParameters** property and providing key-value pairs using the Java **Properties** file syntax (as shown below) or via the **junit-platform.properties** file.

```

<!-- ... -->
<build>
  <plugins>
    <plugin>

```

```

<artifactId>maven-surefire-plugin</artifactId>
<version>3.5.2</version>
<configuration>
  <properties>
    <configurationParameters>
      junit.jupiter.conditions.deactivate = *
      junit.jupiter.extensions.autodetection.enabled = true
      junit.jupiter.testinstance.lifecycle.default = per_class
    </configurationParameters>
  </properties>
</configuration>
</plugin>
</plugins>
</build>
<!-- ... -->

```

4.2.3. Ant

Starting with version 1.10.3, Ant has a `junitlauncher` task that provides native support for launching tests on the JUnit Platform. The `junitlauncher` task is solely responsible for launching the JUnit Platform and passing it the selected collection of tests. The JUnit Platform then delegates to registered test engines to discover and execute the tests.

The `junitlauncher` task attempts to align as closely as possible with native Ant constructs such as `resource collections` for allowing users to select the tests that they want executed by test engines. This gives the task a consistent and natural feel when compared to many other core Ant tasks.

Starting with version 1.10.6 of Ant, the `junitlauncher` task supports [forking the tests in a separate JVM](#).

The `build.xml` file in the `junit5-jupiter-starter-ant` project demonstrates how to use the task and can serve as a starting point.

Basic Usage

The following example demonstrates how to configure the `junitlauncher` task to select a single test class (i.e., `org.myapp.test.MyFirstJUnit5Test`).

```

<path id="test.classpath">
  <!-- The location where you have your compiled classes -->
  <pathelement location="${build.classes.dir}" />
</path>

<!-- ... -->

<junitlauncher>
  <classpath refid="test.classpath" />
  <test name="org.myapp.test.MyFirstJUnit5Test" />
</junitlauncher>

```


The `test` element allows you to specify a single test class that you want to be selected and executed. The `classpath` element allows you to specify the classpath to be used to launch the JUnit Platform. This classpath will also be used to locate test classes that are part of the execution.

The following example demonstrates how to configure the `junitlauncher` task to select test classes from multiple locations.

```
<path id="test.classpath">
  <!-- The location where you have your compiled classes -->
  <pathelement location="${build.classes.dir}" />
</path>
<!-- ... -->
<junitlauncher>
  <classpath refid="test.classpath" />
  <testclasses outputdir="${output.dir}">
    <fileset dir="${build.classes.dir}">
      <include name="org/example/**/demo/**/" />
    </fileset>
    <fileset dir="${some.other.dir}">
      <include name="org/myapp/**/" />
    </fileset>
  </testclasses>
</junitlauncher>
```

In the above example, the `testclasses` element allows you to select multiple test classes that reside in different locations.

For further details on usage and configuration options please refer to the official Ant documentation for the `junitlauncher` task.

4.2.4. Spring Boot

[Spring Boot](#) provides automatic support for managing the version of JUnit used in your project. In addition, the `spring-boot-starter-test` artifact automatically includes testing libraries such as JUnit Jupiter, AssertJ, Mockito, etc.

If your build relies on dependency management support from Spring Boot, you should not import the `junit-bom` in your build script since that will result in duplicate (and potentially conflicting) management of JUnit dependencies.

If you need to override the version of a dependency used in your Spring Boot application, you have to override the exact name of the [version property](#) defined in the BOM used by the Spring Boot plugin. For example, the name of the JUnit Jupiter version property in Spring Boot is `junit-jupiter.version`. The mechanism for changing a dependency version is documented for both [Gradle](#) and [Maven](#).

With Gradle you can override the JUnit Jupiter version by including the following in your `build.gradle` file.

```
ext['junit-jupiter.version'] = '5.12.0-RC1'
```

With Maven you can override the JUnit Jupiter version by including the following in your `pom.xml` file.

```
<properties>
  <junit-jupiter.version>5.12.0-RC1</junit-jupiter.version>
</properties>
```

4.3. Console Launcher

The `ConsoleLauncher` is a command-line Java application that lets you launch the JUnit Platform from the console. For example, it can be used to run JUnit Vintage and JUnit Jupiter tests and print test execution results to the console.

An executable *Fat JAR* (`junit-platform-console-standalone-1.12.0-RC1.jar`) that contains the contents of all of its dependencies is published in the [Maven Central](#) repository under the `junit-platform-console-standalone` directory. It contains the contents of the following artifacts:

- `junit:junit:4.13.2`
- `org.apiguardian:apiguardian-api:1.1.2`
- `org.hamcrest:hamcrest-core:1.3`
- `org.junit.jupiter:junit-jupiter-api:5.12.0-RC1`
- `org.junit.jupiter:junit-jupiter-engine:5.12.0-RC1`
- `org.junit.jupiter:junit-jupiter-params:5.12.0-RC1`
- `org.junit.platform:junit-platform-commons:1.12.0-RC1`
- `org.junit.platform:junit-platform-console:1.12.0-RC1`
- `org.junit.platform:junit-platform-engine:1.12.0-RC1`
- `org.junit.platform:junit-platform-launcher:1.12.0-RC1`
- `org.junit.platform:junit-platform-reporting:1.12.0-RC1`
- `org.junit.platform:junit-platform-suite-api:1.12.0-RC1`
- `org.junit.platform:junit-platform-suite-commons:1.12.0-RC1`
- `org.junit.platform:junit-platform-suite-engine:1.12.0-RC1`
- `org.junit.vintage:junit-vintage-engine:5.12.0-RC1`
- `org.opentest4j:opentest4j:1.3.0`



Since the `junit-platform-console-standalone` JAR contains the contents of all of its dependencies, its Maven POM does not declare any dependencies.

Furthermore, it is not very likely that you would need to include a dependency on

the `junit-platform-console-standalone` artifact in your project's Maven POM or Gradle build script. On the contrary, the executable `junit-platform-console-standalone` JAR is typically invoked directly from the command line or a shell script without a build script.

If you need to declare dependencies in your build script on some of the artifacts contained in the `junit-platform-console-standalone` artifact, you should declare dependencies only on the JUnit artifacts that are used in your project. To simplify dependency management of JUnit artifacts in your build, you may wish to use the `junit-jupiter` aggregator artifact or `junit-bom`. See [Dependency Metadata](#) for details.

You can [run](#) the standalone `ConsoleLauncher` as shown below.

```
$ java -jar junit-platform-console-standalone-1.12.0-RC1.jar execute <OPTIONS>
```

```
|— JUnit Vintage
|   └─ example.JUnit4Tests
|       └─ standardJUnit4Test ✓
└─ JUnit Jupiter
    └─ StandardTests
        └─ succeedingTest() ✓
        └─ skippedTest() ↻ for demonstration purposes
    └─ A special test case
        └─ Custom test name containing spaces ✓
            └─ 🎉) ✓
            └─ 🧑 🧑) ✓
```

```
Test run finished after 64 ms
[      5 containers found      ]
[      0 containers skipped    ]
[      5 containers started    ]
[      0 containers aborted    ]
[      5 containers successful ]
[      0 containers failed     ]
[      6 tests found          ]
[      1 tests skipped         ]
[      5 tests started         ]
[      0 tests aborted         ]
[      5 tests successful      ]
[      0 tests failed         ]
```

You can also run the standalone `ConsoleLauncher` as shown below (for example, to include all jars in a directory):

```
$ java -cp classes:testlib/* org.junit.platform.console.ConsoleLauncher <OPTIONS>
```

Exit Code



The `ConsoleLauncher` exits with a status code of `1` if any containers or tests failed. If no tests are discovered and the `--fail-if-no-tests` command-line option is supplied, the `ConsoleLauncher` exits with a status code of `2`. Otherwise, the exit code is `0`.

4.3.1. Subcommands and Options

The `ConsoleLauncher` provides the following subcommands:

```
Usage: junit [OPTIONS] [COMMAND]
Launches the JUnit Platform for test discovery and execution.
    [@<filename>...]  One or more argument files containing options.
-h, --help           Display help information.
--version            Display version information.
--disable-ansi-colors
                    Disable ANSI colors in output (not supported by all
terminals).
Commands:
discover  Discover tests
execute   Execute tests
engines   List available test engines
```

For more information, please refer to the JUnit User Guide at <https://junit.org/junit5/docs/1.12.0-RC1/user-guide/>

Discovering tests

```
Usage: junit discover [OPTIONS]
Discover tests
    [@<filename>...]  One or more argument files containing options.
--disable-ansi-colors
                    Disable ANSI colors in output (not supported by all
terminals).
--disable-banner     Disable print out of the welcome message.
-h, --help           Display help information.
--version            Display version information.

SELECTORS

--scan-classpath, --scan-class-path[=PATH]
                    Scan all directories on the classpath or explicit
classpath
system
                    roots. Without arguments, only directories on the
classpath as well as additional classpath entries
supplied via
                    -cp (directories and JAR files) are scanned. Explicit
classpath
```

roots that are not on the classpath will be silently ignored.

This option can be repeated.

`--scan-modules` Scan all resolved modules for test discovery.

`-u, --select-uri=URI...` Select a URI for test discovery. This option can be repeated.

`-f, --select-file=FILE...` Select a file for test discovery. The line and column numbers can be provided as URI query parameters (e.g. `foo.txt?line=12&column=34`). This option can be repeated.

`-d, --select-directory=DIR...` Select a directory for test discovery. This option can be repeated.

`-o, --select-module=NAME...` Select single module for test discovery. This option can be repeated.

`-p, --select-package=PKG...` Select a package for test discovery. This option can be repeated.

`-c, --select-class=CLASS...` Select a class for test discovery. This option can be repeated.

`-m, --select-method=NAME...` Select a method for test discovery. This option can be repeated.

`-r, --select-resource=RESOURCE...` Select a classpath resource for test discovery. This option can be repeated.

`-i, --select-iteration=PREFIX:VALUE[INDEX(..INDEX)?(,INDEX(..INDEX)?)*]...` Select iterations for test discovery via a prefixed identifier and a list of indexes or index ranges (e.g. `method:com.acme.Foo#m()[1..2]` selects the first and second iteration of the `m()` method in the `com.acme.Foo` class). This option can be repeated.

`--uid, --select-unique-id=UNIQUE-ID...` Select a unique id for test discovery. This option can be repeated.

`--select=PREFIX:VALUE...` Select via a prefixed identifier (e.g. `method:com.acme.Foo#m` selects the `m()` method in the `com.acme.Foo` class). This option can be repeated.

For more information on selectors including syntax examples, see <https://junit.org/junit5/docs/current/user-guide/#running-tests-discovery-selectors>

FILTERS

`-n, --include-classname=PATTERN` Provide a regular expression to include only classes whose fully qualified names match. To avoid loading classes unnecessarily, the default pattern only includes class names that begin with "Test" or end with "Test" or "Tests". When this option is repeated, all patterns will be combined using OR semantics.
Default: `^(Test.*|.+[.]Test.*|.*Tests?)$`

`-N, --exclude-classname=PATTERN` Provide a regular expression to exclude those classes whose fully qualified names match. When this option is repeated, all patterns will be combined using OR semantics.

`--include-package=PKG` Provide a package to be included in the test run. This option can be repeated.

`--exclude-package=PKG` Provide a package to be excluded from the test run. This option can be repeated.

`--include-methodname=PATTERN` Provide a regular expression to include only methods whose fully qualified names without parameters match. When this option is repeated, all patterns will be combined using OR semantics.

`--exclude-methodname=PATTERN` Provide a regular expression to exclude those methods whose fully qualified names without parameters match. When this option is repeated, all patterns will be combined using OR semantics.

`-t, --include-tag=TAG` Provide a tag or tag expression to include only tests whose tags match. When this option is repeated, all patterns will be combined using OR semantics.

`-T, --exclude-tag=TAG` Provide a tag or tag expression to exclude those tests whose tags match. When this option is repeated, all patterns will be combined using OR semantics.

`-e, --include-engine=ID` Provide the ID of an engine to be included in the test run. This option can be repeated.

`-E, --exclude-engine=ID` Provide the ID of an engine to be excluded from the test run. This option can be repeated.

RUNTIME CONFIGURATION

`-cp, --classpath, --class-path=PATH` Provide additional classpath entries -- for example, for adding engines and their dependencies. This option can be repeated.

`--config-resource=PATH` Set configuration parameters for test discovery and execution via a classpath resource. This option can be repeated.

`--config=KEY=VALUE` Set a configuration parameter for test discovery and execution. This option can be repeated.

CONSOLE OUTPUT

`--color-palette=FILE` Specify a path to a properties file to customize ANSI style of output (not supported by all terminals).

`--single-color` Style test output using only text attributes, no color (not supported by all terminals).

`--details=MODE` Select an output details mode for when tests are executed. Use one of: none, summary, flat, tree, verbose, testfeed. If 'none' is selected, then only the summary and test failures are shown. Default: tree.

`--details-theme=THEME` Select an output details tree theme for when tests are executed. Use one of: ascii, unicode. Default is detected based on default character encoding.

For more information, please refer to the JUnit User Guide at <https://junit.org/junit5/docs/1.12.0-RC1/user-guide/>

Executing tests

Usage: `junit execute [OPTIONS]`
 Execute tests
`[@<filename>...]` One or more argument files containing options.

--disable-ansi-colors Disable ANSI colors in output (not supported by all terminals).
 --disable-banner Disable print out of the welcome message.
 -h, --help Display help information.
 --version Display version information.

SELECTORS

--scan-classpath, --scan-class-path[=PATH]
 classpath Scan all directories on the classpath or explicit
 system roots. Without arguments, only directories on the
 supplied via classpath as well as additional classpath entries
 classpath -cp (directories and JAR files) are scanned. Explicit
 ignored. roots that are not on the classpath will be silently
 ignored.
 This option can be repeated.
 --scan-modules Scan all resolved modules for test discovery.
 -u, --select-uri=URI... Select a URI for test discovery. This option can be
 repeated.
 -f, --select-file=FILE... Select a file for test discovery. The line and column
 numbers can be provided as URI query parameters (e.g. foo.txt?
 line=12&column=34). This option can be repeated.
 -d, --select-directory=DIR...
 Select a directory for test discovery. This option can be
 repeated.
 -o, --select-module=NAME...
 Select single module for test discovery. This option can
 be repeated.
 -p, --select-package=PKG...
 Select a package for test discovery. This option can be
 repeated.
 -c, --select-class=CLASS...
 Select a class for test discovery. This option can be
 repeated.
 -m, --select-method=NAME...
 Select a method for test discovery. This option can be
 repeated.
 -r, --select-resource=RESOURCE...
 Select a classpath resource for test discovery. This
 option can be repeated.
 -i, --select-iteration=PREFIX:VALUE[INDEX(..INDEX)?(,INDEX(..INDEX)?)*]...
 identifier Select iterations for test discovery via a prefixed
 and a list of indexes or index ranges (e.g.

method:com.acme.
Foo#m()[1..2] selects the first and second iteration of the m() method in the com.acme.Foo class). This option can be repeated.

--uid, --select-unique-id=UNIQUE-ID...

Select a unique id for test discovery. This option can be repeated.

--select=PREFIX:VALUE...

Select via a prefixed identifier (e.g.

method:com.acme.Foo#m
selects the m() method in the com.acme.Foo class). This option can be repeated.

For more information on selectors including syntax examples, see <https://junit.org/junit5/docs/current/user-guide/#running-tests-discovery-selectors>

FILTERS

-n, --include-classname=PATTERN

Provide a regular expression to include only classes whose fully qualified names match. To avoid loading classes unnecessarily, the default pattern only includes class names that begin with "Test" or end with "Test" or "Tests". When this option is repeated, all patterns will be combined using OR semantics.

Default: `^(Test.*|.*Test.*|.*Tests?)$`

-N, --exclude-classname=PATTERN

Provide a regular expression to exclude those classes whose fully qualified names match. When this option is repeated, all patterns will be combined using OR semantics.

--include-package=PKG Provide a package to be included in the test run. This option can be repeated.

--exclude-package=PKG Provide a package to be excluded from the test run. This option can be repeated.

--include-methodname=PATTERN

Provide a regular expression to include only methods whose fully qualified names without parameters match. When this option is repeated, all patterns will be combined using OR semantics.

`--exclude-methodname=PATTERN`
 Provide a regular expression to exclude those methods whose fully qualified names without parameters match. When this option is repeated, all patterns will be combined using OR semantics.

`-t, --include-tag=TAG`
 Provide a tag or tag expression to include only tests whose tags match. When this option is repeated, all patterns will be combined using OR semantics.

`-T, --exclude-tag=TAG`
 Provide a tag or tag expression to exclude those tests whose tags match. When this option is repeated, all patterns will be combined using OR semantics.

`-e, --include-engine=ID`
 Provide the ID of an engine to be included in the test run. This option can be repeated.

`-E, --exclude-engine=ID`
 Provide the ID of an engine to be excluded from the test run. This option can be repeated.

RUNTIME CONFIGURATION

`-cp, --classpath, --class-path=PATH`
 Provide additional classpath entries -- for example, for adding engines and their dependencies. This option can be repeated.

`--config-resource=PATH` Set configuration parameters for test discovery and execution via a classpath resource. This option can be repeated.

`--config=KEY=VALUE` Set a configuration parameter for test discovery and execution. This option can be repeated.

CONSOLE OUTPUT

`--color-palette=FILE` Specify a path to a properties file to customize ANSI style of output (not supported by all terminals).

`--single-color` Style test output using only text attributes, no color (not supported by all terminals).

`--details=MODE` Select an output details mode for when tests are executed. Use one of: none, summary, flat, tree, verbose, testfeed. If 'none' is selected, then only the summary and test failures

are shown.

Default: tree.

`--details-theme=THEME` Select an output details tree theme for when tests are executed.

on Use one of: `ascii`, `unicode`. Default is detected based on default character encoding.

REPORTING

`--fail-if-no-tests` Fail and return exit status code 2 if no tests are found.

`--reports-dir=DIR` Enable report output into a specified local directory (will be created if it does not exist).

For more information, please refer to the JUnit User Guide at <https://junit.org/junit5/docs/1.12.0-RC1/user-guide/>

Listing test engines

Usage: `junit engines [OPTIONS]`

List available test engines

`[@<filename>...]` One or more argument files containing options.

`--disable-ansi-colors`

Disable ANSI colors in output (not supported by all terminals).

`--disable-banner` Disable print out of the welcome message.

`-h, --help` Display help information.

`--version` Display version information.

For more information, please refer to the JUnit User Guide at <https://junit.org/junit5/docs/1.12.0-RC1/user-guide/>

4.3.2. Argument Files (@-files)

On some platforms you may run into system limitations on the length of a command line when creating a command line with lots of options or with long arguments.

Since version 1.3, the `ConsoleLauncher` supports *argument files*, also known as *@-files*. Argument files are files that themselves contain arguments to be passed to the command. When the underlying `picocli` command line parser encounters an argument beginning with the character `@`, it expands the contents of that file into the argument list.

The arguments within a file can be separated by spaces or newlines. If an argument contains embedded whitespace, the whole argument should be wrapped in double or single quotes—for example, `"-f=My Files/Stuff.java"`.

If the argument file does not exist or cannot be read, the argument will be treated literally and will not be removed. This will likely result in an "unmatched argument" error message. You can

troubleshoot such errors by executing the command with the `picocli.trace` system property set to `DEBUG`.

Multiple `@files` may be specified on the command line. The specified path may be relative to the current directory or absolute.

You can pass a real parameter with an initial `@` character by escaping it with an additional `@` symbol. For example, `@@somearg` will become `@somearg` and will not be subject to expansion.

4.3.3. Color customization

The colors used in the output of the `ConsoleLauncher` can be customized. The option `--single-color` will apply a built-in monochrome style, while `--color-palette` will accept a properties file to override the `ANSI SGR` color styling. The properties file below demonstrates the default style:

```
SUCCESSFUL = 32
ABORTED = 33
FAILED = 31
SKIPPED = 35
CONTAINER = 35
TEST = 34
DYNAMIC = 35
REPORTED = 37
```

4.4. Using JUnit 4 to run the JUnit Platform

The `JUnitPlatform` runner has been deprecated

The `JUnitPlatform` runner was developed by the JUnit team as an interim solution for running test suites and tests on the JUnit Platform in a JUnit 4 environment.

In recent years, all mainstream build tools and IDEs provide built-in support for running tests directly on the JUnit Platform.



In addition, the introduction of `@Suite` support provided by the `junit-platform-suite-engine` module makes the `JUnitPlatform` runner obsolete. See [JUnit Platform Suite Engine](#) for details.

The `JUnitPlatform` runner and `@UseTechnicalNames` annotation have therefore been deprecated in JUnit Platform 1.8 and will be removed in JUnit Platform 2.0.

If you are using the `JUnitPlatform` runner, please migrate to the `@Suite` support.

The `JUnitPlatform` runner is a JUnit 4 based `Runner` which enables you to run any test whose programming model is supported on the JUnit Platform in a JUnit 4 environment—for example, a JUnit Jupiter test class.

Annotating a class with `@RunWith(JUnitPlatform.class)` allows it to be run with IDEs and build systems that support JUnit 4 but do not yet support the JUnit Platform directly.



Since the JUnit Platform has features that JUnit 4 does not have, the runner is only able to support a subset of the JUnit Platform functionality, especially with regard to reporting (see [Display Names vs. Technical Names](#)).

4.4.1. Setup

You need the following artifacts and their dependencies on the classpath. See [Dependency Metadata](#) for details regarding group IDs, artifact IDs, and versions.

Explicit Dependencies

- `junit-platform-runner` in *test* scope: location of the `JUnitPlatform` runner
- `junit-4.13.2.jar` in *test* scope: to run tests using JUnit 4
- `junit-jupiter-api` in *test* scope: API for writing tests using JUnit Jupiter, including `@Test`, etc.
- `junit-jupiter-engine` in *test runtime* scope: implementation of the `TestEngine` API for JUnit Jupiter

Transitive Dependencies

- `junit-platform-suite-api` in *test* scope
- `junit-platform-suite-commons` in *test* scope
- `junit-platform-launcher` in *test* scope
- `junit-platform-engine` in *test* scope
- `junit-platform-commons` in *test* scope
- `opentest4j` in *test* scope

4.4.2. Display Names vs. Technical Names

To define a custom *display name* for the class run via `@RunWith(JUnitPlatform.class)` annotate the class with `@SuiteDisplayName` and provide a custom value.

By default, *display names* will be used for test artifacts; however, when the `JUnitPlatform` runner is used to execute tests with a build tool such as Gradle or Maven, the generated test report often needs to include the *technical names* of test artifacts — for example, fully qualified class names — instead of shorter display names like the simple name of a test class or a custom display name containing special characters. To enable technical names for reporting purposes, declare the `@UseTechnicalNames` annotation alongside `@RunWith(JUnitPlatform.class)`.

Note that the presence of `@UseTechnicalNames` overrides any custom display name configured via `@SuiteDisplayName`.

4.4.3. Single Test Class

One way to use the `JUnitPlatform` runner is to annotate a test class with `@RunWith(JUnitPlatform.class)` directly. Please note that the test methods in the following example are annotated with `org.junit.jupiter.api.Test` (JUnit Jupiter), not `org.junit.Test` (JUnit 4).

Moreover, in this case the test class must be `public`; otherwise, some IDEs and build tools might not recognize it as a JUnit 4 test class.

```
import static org.junit.jupiter.api.Assertions.fail;

import org.junit.jupiter.api.Test;
import org.junit.runner.RunWith;

@RunWith(org.junit.platform.runner.JUnitPlatform.class)
public class JUnitPlatformClassDemo {

    @Test
    void succeedingTest() {
        /* no-op */
    }

    @Test
    void failingTest() {
        fail("Failing for failing's sake.");
    }

}
```

4.4.4. Test Suite

If you have multiple test classes you can create a test suite as can be seen in the following example.

```
import org.junit.platform.suite.api.SelectPackages;
import org.junit.platform.suite.api.SuiteDisplayName;
import org.junit.runner.RunWith;

@RunWith(org.junit.platform.runner.JUnitPlatform.class)
@SuiteDisplayName("JUnit Platform Suite Demo")
@SelectPackages("example")
public class JUnitPlatformSuiteDemo {

}
```

The `JUnitPlatformSuiteDemo` will discover and run all tests in the `example` package and its subpackages. By default, it will only include test classes whose names either begin with `Test` or end with `Test` or `Tests`.



Additional Configuration Options

There are more configuration options for discovering and filtering tests than just `@SelectPackages`. Please consult the Javadoc of the `org.junit.platform.suite.api` package for further details.



Test classes and suites annotated with `@RunWith(JUnitPlatform.class)` **cannot** be

executed directly on the JUnit Platform (or as a "JUnit 5" test as documented in some IDEs). Such classes and suites can only be executed using JUnit 4 infrastructure.

4.5. Discovery Selectors

The JUnit Platform provides a rich set of discovery selectors that can be used to specify which tests should be discovered or executed.

Discovery selectors can be created programmatically using the factory methods in the [DiscoverySelectors](#) class, specified declaratively via annotations when using the [JUnit Platform Suite Engine](#), via options of the [Console Launcher](#), or generically as strings via their identifiers.

The following discovery selectors are provided out of the box:

Java Type	API	Annotation	Console Launcher	Identifier
ClasspathResourceSelector	selectClasspathResource	@SelectClasspathResource	<code>--select-resource /foo.csv</code>	<code>resource:/foo.csv</code>
ClasspathRootSelector	selectClasspathRoots	—	<code>--scan-classpath bin</code>	<code>classpath-root:bin</code>
ClassSelector	selectClass	@SelectClasses	<code>--select-class com.acme.Foo</code>	<code>class:com.acme.Foo</code>
DirectorySelector	selectDirectory	@SelectDirectories	<code>--select-directory foo/bar</code>	<code>directory:foo/bar</code>
FileSelector	selectFile	@SelectFile	<code>--select-file dir/foo.txt</code>	<code>file:dir/foo.txt</code>
IterationSelector	selectIteration	@Select("<identifier>")	<code>--select-iteration method=com.acme.Foo#m[1..2]</code>	<code>iteration:method:com.acme.Foo#m[1..2]</code>
MethodSelector	selectMethod	@SelectMethod	<code>--select-method com.acme.Foo#m</code>	<code>method:com.acme.Foo#m</code>
ModuleSelector	selectModule	@SelectModules	<code>--select-module com.acme</code>	<code>module:com.acme</code>
NestedClassSelector	selectNestedClass	@Select("<identifier>")	<code>--select <identifier></code>	<code>nested-class:com.acme.Foo/Bar</code>
NestedMethodSelector	selectNestedMethod	@Select("<identifier>")	<code>--select <identifier></code>	<code>nested-method:com.acme.Foo/Bar#m</code>
PackageSelector	selectPackage	@SelectPackages	<code>--select-package com.acme.foo</code>	<code>package:com.acme.foo</code>
UniqueIdSelector	selectUniqueId	@Select("<identifier>")	<code>--select <identifier></code>	<code>uid:...</code>
UriSelector	selectUri	@SelectUris	<code>--select-uri file:///foo.txt</code>	<code>uri:file:///foo.txt</code>

4.6. Configuration Parameters

In addition to instructing the platform which test classes and test engines to include, which packages to scan, etc., it is sometimes necessary to provide additional custom configuration parameters that are specific to a particular test engine, listener, or registered extension. For example, the JUnit Jupiter `TestEngine` supports *configuration parameters* for the following use cases.

- [Changing the Default Test Instance Lifecycle](#)
- [Enabling Automatic Extension Detection](#)
- [Deactivating Conditions](#)
- [Setting the Default Display Name Generator](#)

Configuration Parameters are text-based key-value pairs that can be supplied to test engines running on the JUnit Platform via one of the following mechanisms.

1. The `configurationParameter()` and `configurationParameters()` methods in `LauncherDiscoveryRequestBuilder` which is used to build a request supplied to the `Launcher API`. When running tests via one of the tools provided by the JUnit Platform you can specify configuration parameters as follows:
 - **Console Launcher**: use the `--config` command-line option.
 - **Gradle**: use the `systemProperty` or `systemProperties` DSL.
 - **Maven Surefire provider**: use the `configurationParameters` property.
2. The `configurationParametersResources()` method in `LauncherDiscoveryRequestBuilder`. When running tests via the **Console Launcher** you can specify custom configuration files using the `--config-resource` command-line option.
3. JVM system properties.
4. The JUnit Platform default configuration file: a file named `junit-platform.properties` in the root of the class path that follows the syntax rules for Java `Properties` files.



Configuration parameters are looked up in the exact order defined above. Consequently, configuration parameters supplied directly to the `Launcher` take precedence over those supplied via custom configuration files, system properties, and the default configuration file. Similarly, configuration parameters supplied via system properties take precedence over those supplied via the default configuration file.

4.6.1. Pattern Matching Syntax

This section describes the pattern matching syntax that is applied to the *configuration parameters* used for the following features.

- [Deactivating Conditions](#)
- [Deactivating a TestExecutionListener](#)
- [Stack Trace Pruning](#)

- [Filtering Auto-detected Extensions](#)

If the value for the given *configuration parameter* consists solely of an asterisk (*), the pattern will match against all candidate classes. Otherwise, the value will be treated as a comma-separated list of patterns where each pattern will be matched against the fully qualified class name (FQCN) of each candidate class. Any dot (.) in a pattern will match against a dot (.) or a dollar sign (\$) in a FQCN. Any asterisk (*) will match against one or more characters in a FQCN. All other characters in a pattern will be matched one-to-one against a FQCN.

Examples:

- *: matches all candidate classes.
- org.junit.*: matches all candidate classes under the org.junit base package and any of its subpackages.
- *.MyCustomImpl: matches every candidate class whose simple class name is exactly MyCustomImpl.
- *System*: matches every candidate class whose FQCN contains System.
- *System*, *Unit*: matches every candidate class whose FQCN contains System or Unit.
- org.example.MyCustomImpl: matches the candidate class whose FQCN is exactly org.example.MyCustomImpl.
- org.example.MyCustomImpl, org.example.TheirCustomImpl: matches candidate classes whose FQCN is exactly org.example.MyCustomImpl or org.example.TheirCustomImpl.

4.7. Tags

Tags are a JUnit Platform concept for marking and filtering tests. The programming model for adding tags to containers and tests is defined by the testing framework. For example, in JUnit Jupiter based tests, the @Tag annotation (see [Tagging and Filtering](#)) should be used. For JUnit 4 based tests, the Vintage engine maps @Category annotations to tags (see [Categories Support](#)). Other testing frameworks may define their own annotation or other means for users to specify tags.

4.7.1. Syntax Rules for Tags

Regardless how a tag is specified, the JUnit Platform enforces the following rules:

- A tag must not be null or blank.
- A trimmed tag must not contain whitespace.
- A trimmed tag must not contain ISO control characters.
- A trimmed tag must not contain any of the following reserved characters.
 - ,: comma
 - (: left parenthesis
 -): right parenthesis
 - &: ampersand
 - |: vertical bar

- **!:** *exclamation point*



In the above context, "trimmed" means that leading and trailing whitespace characters have been removed.

4.7.2. Tag Expressions

Tag expressions are boolean expressions with the operators **!**, **&** and **|**. In addition, **(** and **)** can be used to adjust for operator precedence.

Two special expressions are supported, **any()** and **none()**, which select all tests *with* any tags at all, and all tests *without* any tags, respectively. These special expressions may be combined with other expressions just like normal tags.

Table 2. Operators (in descending order of precedence)

Operator	Meaning	Associativity
!	not	right
&	and	left
 	or	left

If you are tagging your tests across multiple dimensions, tag expressions help you to select which tests to execute. When tagging by test type (e.g., *micro*, *integration*, *end-to-end*) and feature (e.g., **product**, **catalog**, **shipping**), the following tag expressions can be useful.

Tag Expression	Selection
product	all tests for product
catalog shipping	all tests for catalog plus all tests for shipping
<code>catalog & shipping</code>	all tests for the intersection between catalog and shipping
<code>product & !end-to-end</code>	all tests for product , but not the <i>end-to-end</i> tests
<code>(micro integration) & (product shipping)</code>	all <i>micro</i> or <i>integration</i> tests for product or shipping

4.8. Capturing Standard Output/Error

Since version 1.3, the JUnit Platform provides opt-in support for capturing output printed to `System.out` and `System.err`. To enable it, set the `junit.platform.output.capture.stdout` and/or `junit.platform.output.capture.stderr` configuration parameter to `true`. In addition, you may configure the maximum number of buffered bytes to be used per executed test or container using `junit.platform.output.capture.maxBuffer`.

If enabled, the JUnit Platform captures the corresponding output and publishes it as a report entry using the `stdout` or `stderr` keys to all registered `TestExecutionListener` instances immediately before reporting the test or container as finished.

Please note that the captured output will only contain output emitted by the thread that was used to

execute a container or test. Any output by other threads will be omitted because particularly when [executing tests in parallel](#) it would be impossible to attribute it to a specific test or container.

4.9. Using Listeners and Interceptors

The JUnit Platform provides the following listener APIs that allow JUnit, third parties, and custom user code to react to events fired at various points during the discovery and execution of a `TestPlan`.

- `LauncherSessionListener`: receives events when a `LauncherSession` is opened and closed.
- `LauncherInterceptor`: intercepts test discovery and execution in the context of a `LauncherSession`.
- `LauncherDiscoveryListener`: receives events that occur during test discovery.
- `TestExecutionListener`: receives events that occur during test execution.

The `LauncherSessionListener` API is typically implemented by build tools or IDEs and registered automatically for you in order to support some feature of the build tool or IDE.

The `LauncherDiscoveryListener` and `TestExecutionListener` APIs are often implemented in order to produce some form of report or to display a graphical representation of the test plan in an IDE. Such listeners may be implemented and automatically registered by a build tool or IDE, or they may be included in a third-party library – potentially registered for you automatically. You can also implement and register your own listeners.

For details on registering and configuring listeners, see the following sections of this guide.

- [Registering a LauncherSessionListener](#)
- [Registering a LauncherInterceptor](#)
- [Registering a LauncherDiscoveryListener](#)
- [Registering a TestExecutionListener](#)
- [Configuring a TestExecutionListener](#)
- [Deactivating a TestExecutionListener](#)

The JUnit Platform provides the following listeners which you may wish to use with your test suite.

JUnit Platform Reporting

`LegacyXmlReportGeneratingListener` can be used via the `Console Launcher` or registered manually to generate XML reports compatible with the de facto standard for JUnit 4 based test reports.

`OpenTestReportGeneratingListener` generates an XML report in the event-based format specified by `Open Test Reporting`. It is auto-registered and can be enabled and configured via `Configuration Parameters`.

See [JUnit Platform Reporting](#) for details.

Flight Recorder Support

`FlightRecordingExecutionListener` and `FlightRecordingDiscoveryListener` that generate Java Flight Recorder events during test discovery and execution.

LoggingListener

`TestExecutionListener` for logging informational messages for all events via a `BiConsumer` that consumes `Throwable` and `Supplier<String>`.

SummaryGeneratingListener

`TestExecutionListener` that generates a summary of the test execution which can be printed via a `PrintWriter`.

UniqueIdTrackingListener

`TestExecutionListener` that tracks the unique IDs of all tests that were skipped or executed during the execution of the `TestPlan` and generates a file containing the unique IDs once execution of the `TestPlan` has finished.

4.9.1. Flight Recorder Support

Since version 1.7, the JUnit Platform provides opt-in support for generating Flight Recorder events. [JEP 328](#) describes the Java Flight Recorder (JFR) as:



Flight Recorder records events originating from applications, the JVM and the OS. Events are stored in a single file that can be attached to bug reports and examined by support engineers, allowing after-the-fact analysis of issues in the period leading up to a problem.

In order to record Flight Recorder events generated while running tests, you need to:

1. Ensure that you are using either Java 8 Update 262 or higher or Java 11 or later.
2. Provide the `org.junit.platform.jfr` module (`junit-platform-jfr-1.12.0-RC1.jar`) on the class-path or module-path at test runtime.
3. Start flight recording when launching a test run. Flight Recorder can be started via java command line option:

```
-XX:StartFlightRecording:filename=...
```

Please consult the manual of your build tool for the appropriate commands.

To analyze the recorded events, use the `jfr` command line tool shipped with recent JDKs or open the recording file with [JDK Mission Control](#).



Flight Recorder support is currently an *experimental* feature. You're invited to give it a try and provide feedback to the JUnit team so they can improve and eventually [promote](#) this feature.

4.10. Stack Trace Pruning

Since version 1.10, the JUnit Platform provides built-in support for pruning stack traces produced by failing tests. This feature is enabled by default but can be disabled by setting the

`junit.platform.stacktrace.pruning.enabled` configuration parameter to `false`.

When enabled, all calls from the `org.junit`, `jdk.internal.reflect`, and `sun.reflect` packages are removed from the stack trace, unless the calls occur after the test itself or any of its ancestors. For that reason, calls to `org.junit.jupiter.api.Assertions` or `org.junit.jupiter.api.Assumptions` will never be excluded.

In addition, all elements prior to and including the first call from the JUnit Platform Launcher will be removed.

5. Extension Model

5.1. Overview

In contrast to the competing `Runner`, `TestRule`, and `MethodRule` extension points in JUnit 4, the JUnit Jupiter extension model consists of a single, coherent concept: the `Extension` API. Note, however, that `Extension` itself is just a marker interface.

5.2. Registering Extensions

Extensions can be registered *declaratively* via `@ExtendWith`, *programmatically* via `@RegisterExtension`, or *automatically* via Java's `ServiceLoader` mechanism.

5.2.1. Declarative Extension Registration

Developers can register one or more extensions *declaratively* by annotating a test interface, test class, test method, or custom *composed annotation* with `@ExtendWith(...)` and supplying class references for the extensions to register. As of JUnit Jupiter 5.8, `@ExtendWith` may also be declared on fields or on parameters in test class constructors, in test methods, and in `@BeforeAll`, `@AfterAll`, `@BeforeEach`, and `@AfterEach` lifecycle methods.

For example, to register a `WebServerExtension` for a particular test method, you would annotate the test method as follows. We assume the `WebServerExtension` starts a local web server and injects the server's URL into parameters annotated with `@WebServerUrl`.

```
@Test
@ExtendWith(WebServerExtension.class)
void getProductList(@WebServerUrl String serverUrl) {
    WebClient webClient = new WebClient();
    // Use WebClient to connect to web server using serverUrl and verify response
    assertEquals(200, webClient.get(serverUrl + "/products").getResponseStatus());
}
```

To register the `WebServerExtension` for all tests in a particular class and its subclasses, you would annotate the test class as follows.

```
@ExtendWith(WebServerExtension.class)
class MyTests {
    // ...
}
```

Multiple extensions can be registered together like this:

```
@ExtendWith({ DatabaseExtension.class, WebServerExtension.class })
class MyFirstTests {
    // ...
}
```

As an alternative, multiple extensions can be registered separately like this:

```
@ExtendWith(DatabaseExtension.class)
@ExtendWith(WebServerExtension.class)
class MySecondTests {
    // ...
}
```



Extension Registration Order

Extensions registered declaratively via `@ExtendWith` at the class level, method level, or parameter level will be executed in the order in which they are declared in the source code. For example, the execution of tests in both `MyFirstTests` and `MySecondTests` will be extended by the `DatabaseExtension` and `WebServerExtension`, **in exactly that order**.

If you wish to combine multiple extensions in a reusable way, you can define a custom *composed annotation* and use `@ExtendWith` as a *meta-annotation* as in the following code listing. Then `@DatabaseAndWebServerExtension` can be used in place of `@ExtendWith({ DatabaseExtension.class, WebServerExtension.class })`.

```
@Target({ ElementType.TYPE, ElementType.METHOD })
@Retention(RetentionPolicy.RUNTIME)
@ExtendWith({ DatabaseExtension.class, WebServerExtension.class })
public @interface DatabaseAndWebServerExtension {
}
```

The above examples demonstrate how `@ExtendWith` can be applied at the class level or at the method level; however, for certain use cases it makes sense for an extension to be registered declaratively at the field or parameter level. Consider a `RandomNumberExtension` which generates random numbers that can be injected into a field or via a parameter in a constructor, test method, or lifecycle method. If the extension provides a `@Random` annotation that is meta-annotated with `@ExtendWith(RandomNumberExtension.class)` (see listing below), the extension can be used

transparently as in the following `RandomNumberDemo` example.

```
@Target({ ElementType.FIELD, ElementType.PARAMETER })
@Retention(RetentionPolicy.RUNTIME)
@ExtendWith(RandomNumberExtension.class)
public @interface Random {
}
```

```
class RandomNumberDemo {

    // Use static randomNumber0 field anywhere in the test class,
    // including @BeforeAll or @AfterEach lifecycle methods.
    @Random
    private static Integer randomNumber0;

    // Use randomNumber1 field in test methods and @BeforeEach
    // or @AfterEach lifecycle methods.
    @Random
    private int randomNumber1;

    RandomNumberDemo(@Random int randomNumber2) {
        // Use randomNumber2 in constructor.
    }

    @BeforeEach
    void beforeEach(@Random int randomNumber3) {
        // Use randomNumber3 in @BeforeEach method.
    }

    @Test
    void test(@Random int randomNumber4) {
        // Use randomNumber4 in test method.
    }

}
```

The following code listing provides an example of how one might choose to implement such a `RandomNumberExtension`. This implementation works for the use cases in `RandomNumberDemo`; however, it may not prove robust enough to cover all use cases—for example, the random number generation support is limited to integers; it uses `java.util.Random` instead of `java.security.SecureRandom`; etc. In any case, it is important to note which extension APIs are implemented and for what reasons.

Specifically, `RandomNumberExtension` implements the following extension APIs:

- `BeforeAllCallback`: to support static field injection
- `TestInstancePostProcessor`: to support non-static field injection

- `ParameterResolver`: to support constructor and method injection

```
import static org.junit.platform.commons.support.AnnotationSupport.  
findAnnotatedFields;  
  
import java.lang.reflect.Field;  
import java.util.function.Predicate;  
  
import org.junit.jupiter.api.extension.BeforeAllCallback;  
import org.junit.jupiter.api.extension.ExtensionContext;  
import org.junit.jupiter.api.extension.ParameterContext;  
import org.junit.jupiter.api.extension.ParameterResolver;  
import org.junit.jupiter.api.extension.TestInstancePostProcessor;  
import org.junit.platform.commons.support.ModifierSupport;  
  
class RandomNumberExtension  
    implements BeforeAllCallback, TestInstancePostProcessor, ParameterResolver {  
  
    private final java.util.Random random = new java.util.Random(System.nanoTime());  
  
    /**  
     * Inject a random integer into static fields that are annotated with  
     * {@code @Random} and can be assigned an integer value.  
     */  
    @Override  
    public void beforeAll(ExtensionContext context) {  
        Class<?> testClass = context.getRequiredTestClass();  
        injectFields(testClass, null, ModifierSupport::isStatic);  
    }  
  
    /**  
     * Inject a random integer into non-static fields that are annotated with  
     * {@code @Random} and can be assigned an integer value.  
     */  
    @Override  
    public void postProcessTestInstance(Object testInstance, ExtensionContext context)  
    {  
        Class<?> testClass = context.getRequiredTestClass();  
        injectFields(testClass, testInstance, ModifierSupport::isNotStatic);  
    }  
  
    /**  
     * Determine if the parameter is annotated with {@code @Random} and can be  
     * assigned an integer value.  
     */  
    @Override  
    public boolean supportsParameter(ParameterContext pc, ExtensionContext ec) {  
        return pc.isAnnotated(Random.class) && isInteger(pc.getParameter().getType());  
    }  
}
```



```

/**
 * Resolve a random integer.
 */
@Override
public Integer resolveParameter(ParameterContext pc, ExtensionContext ec) {
    return this.random.nextInt();
}

private void injectFields(Class<?> testClass, Object testInstance,
    Predicate<Field> predicate) {

    predicate = predicate.and(field -> isInteger(field.getType()));
    findAnnotatedFields(testClass, Random.class, predicate)
        .forEach(field -> {
            try {
                field.setAccessible(true);
                field.set(testInstance, this.random.nextInt());
            }
            catch (Exception ex) {
                throw new RuntimeException(ex);
            }
        });
}

private static boolean isInteger(Class<?> type) {
    return type == Integer.class || type == int.class;
}
}

```



Extension Registration Order for @ExtendWith on Fields

Extensions registered declaratively via `@ExtendWith` on fields will be ordered relative to `@RegisterExtension` fields and other `@ExtendWith` fields using an algorithm that is deterministic but intentionally nonobvious. However, `@ExtendWith` fields can be ordered using the `@Order` annotation. See the [Extension Registration Order](#) tip for `@RegisterExtension` fields for details.



Extension Inheritance

Extensions registered declaratively via `@ExtendWith` on fields in superclasses will be inherited.

See [Extension Inheritance](#) for details.



`@ExtendWith` fields may be either `static` or non-static. The documentation on [Static Fields](#) and [Instance Fields](#) for `@RegisterExtension` fields also applies to `@ExtendWith` fields.

5.2.2. Programmatic Extension Registration

Developers can register extensions *programmatically* by annotating fields in test classes with `@RegisterExtension`.

When an extension is registered *declaratively* via `@ExtendWith`, it can typically only be configured via annotations. In contrast, when an extension is registered via `@RegisterExtension`, it can be configured *programmatically*—for example, in order to pass arguments to the extension’s constructor, a static factory method, or a builder API.

Extension Registration Order

By default, extensions registered programmatically via `@RegisterExtension` or declaratively via `@ExtendWith` on fields will be ordered using an algorithm that is deterministic but intentionally nonobvious. This ensures that subsequent runs of a test suite execute extensions in the same order, thereby allowing for repeatable builds. However, there are times when extensions need to be registered in an explicit order. To achieve that, annotate `@RegisterExtension` fields or `@ExtendWith` fields with `@Order`.



Any `@RegisterExtension` field or `@ExtendWith` field not annotated with `@Order` will be ordered using the *default* order which has a value of `Integer.MAX_VALUE / 2`. This allows `@Order` annotated extension fields to be explicitly ordered before or after non-annotated extension fields. Extensions with an explicit order value less than the default order value will be registered before non-annotated extensions. Similarly, extensions with an explicit order value greater than the default order value will be registered after non-annotated extensions. For example, assigning an extension an explicit order value that is greater than the default order value allows *before* callback extensions to be registered last and *after* callback extensions to be registered first, relative to other programmatically registered extensions.

Extension Inheritance



Extensions registered via `@RegisterExtension` or `@ExtendWith` on fields in superclasses will be inherited.

See [Extension Inheritance](#) for details.



`@RegisterExtension` fields must not be `null` (at evaluation time) but may be either `static` or non-`static`.

Static Fields

If a `@RegisterExtension` field is `static`, the extension will be registered after extensions that are registered at the class level via `@ExtendWith`. Such *static extensions* are not limited in which extension APIs they can implement. Extensions registered via static fields may therefore implement class-level and instance-level extension APIs such as `BeforeAllCallback`, `AfterAllCallback`, `TestInstancePostProcessor`, and `TestInstancePreDestroyCallback` as well as method-level extension APIs such as `BeforeEachCallback`, etc.

In the following example, the `server` field in the test class is initialized programmatically by using a builder pattern supported by the `WebServerExtension`. The configured `WebServerExtension` will be automatically registered as an extension at the class level—for example, in order to start the server before all tests in the class and then stop the server after all tests in the class have completed. In addition, static lifecycle methods annotated with `@BeforeAll` or `@AfterAll` as well as `@BeforeEach`, `@AfterEach`, and `@Test` methods can access the instance of the extension via the `server` field if necessary.

Registering an extension via a static field in Java

```
class WebServerDemo {

    @RegisterExtension
    static WebServerExtension server = WebServerExtension.builder()
        .enableSecurity(false)
        .build();

    @Test
    void getProductList() {
        WebClient webClient = new WebClient();
        String serverUrl = server.getServerUrl();
        // Use WebClient to connect to web server using serverUrl and verify response
        assertEquals(200, webClient.get(serverUrl + "/products").getResponseStatus());
    }

}
```

Static Fields in Kotlin

The Kotlin programming language does not have the concept of a `static` field. However, the compiler can be instructed to generate a `private static` field using the `@JvmStatic` annotation in Kotlin. If you want the Kotlin compiler to generate a `public static` field, you can use the `@JvmField` annotation instead.

The following example is a version of the `WebServerDemo` from the previous section that has been ported to Kotlin.

Registering an extension via a static field in Kotlin

```
class KotlinWebServerDemo {
    companion object {
        @JvmField
        @RegisterExtension
        val server =
            WebServerExtension
                .builder()
                .enableSecurity(false)
                .build()!!
    }
}
```

```

@Test
fun getProductList() {
    // Use WebClient to connect to web server using serverUrl and verify response
    val webClient = WebClient()
    val serverUrl = server.serverUrl
    assertEquals(200, webClient.get("$serverUrl/products").responseStatus)
}
}

```

Instance Fields

If a `@RegisterExtension` field is non-static (i.e., an instance field), the extension will be registered after the test class has been instantiated and after each registered `TestInstancePostProcessor` has been given a chance to post-process the test instance (potentially injecting the instance of the extension to be used into the annotated field). Thus, if such an *instance extension* implements class-level or instance-level extension APIs such as `BeforeAllCallback`, `AfterAllCallback`, or `TestInstancePostProcessor`, those APIs will not be honored. Instance extensions will be registered *before* extensions that are registered at the method level via `@ExtendWith`.

In the following example, the `docs` field in the test class is initialized programmatically by invoking a custom `lookUpDocsDir()` method and supplying the result to the static `forPath()` factory method in the `DocumentationExtension`. The configured `DocumentationExtension` will be automatically registered as an extension at the method level. In addition, `@BeforeEach`, `@AfterEach`, and `@Test` methods can access the instance of the extension via the `docs` field if necessary.

An extension registered via an instance field

```

class DocumentationDemo {

    static Path lookUpDocsDir() {
        // return path to docs dir
    }

    @RegisterExtension
    DocumentationExtension docs = DocumentationExtension.forPath(lookUpDocsDir());

    @Test
    void generateDocumentation() {
        // use this.docs ...
    }
}

```

5.2.3. Automatic Extension Registration

In addition to [declarative extension registration](#) and [programmatic extension registration](#) support using annotations, JUnit Jupiter also supports *global extension registration* via Java's `ServiceLoader` mechanism, allowing third-party extensions to be auto-detected and automatically registered based on what is available in the classpath.

Specifically, a custom extension can be registered by supplying its fully qualified class name in a file named `org.junit.jupiter.api.extension.Extension` within the `/META-INF/services` folder in its enclosing JAR file.

Enabling Automatic Extension Detection

Auto-detection is an advanced feature and is therefore not enabled by default. To enable it, set the `junit.jupiter.extensions.autodetection.enabled` *configuration parameter* to `true`. This can be supplied as a JVM system property, as a *configuration parameter* in the `LauncherDiscoveryRequest` that is passed to the `Launcher`, or via the JUnit Platform configuration file (see [Configuration Parameters](#) for details).

For example, to enable auto-detection of extensions, you can start your JVM with the following system property.

```
-Djunit.jupiter.extensions.autodetection.enabled=true
```

When auto-detection is enabled, extensions discovered via the `ServiceLoader` mechanism will be added to the extension registry after JUnit Jupiter's global extensions (e.g., support for `TestInfo`, `TestReporter`, etc.).

Filtering Auto-detected Extensions

The list of auto-detected extensions can be filtered using include and exclude patterns via the following [configuration parameters](#):

```
junit.jupiter.extensions.autodetection.include=<patterns>
```

Comma-separated list of *include* patterns for auto-detected extensions.

```
junit.jupiter.extensions.autodetection.exclude=<patterns>
```

Comma-separated list of *exclude* patterns for auto-detected extensions.

Include patterns are applied *before* exclude patterns. If both include and exclude patterns are provided, only extensions that match at least one include pattern and do not match any exclude pattern will be auto-detected.

See [Pattern Matching Syntax](#) for details on the pattern syntax.

5.2.4. Extension Inheritance

Registered extensions are inherited within test class hierarchies with top-down semantics. Similarly, extensions registered at the class-level are inherited at the method-level. This applies to all extensions, independent of how they are registered (declaratively or programmatically).

This means that extensions registered declaratively via `@ExtendWith` on a superclass will be registered before extensions registered declaratively via `@ExtendWith` on a subclass.

Similarly, extensions registered programmatically via `@RegisterExtension` or `@ExtendWith` on fields in a superclass will be registered before extensions registered programmatically via `@RegisterExtension` or `@ExtendWith` on fields in a subclass, unless `@Order` is used to alter that behavior

(see [Extension Registration Order](#) for details).



A specific extension implementation can only be registered once for a given extension context and its parent contexts. Consequently, any attempt to register a duplicate extension implementation will be ignored.

5.3. Conditional Test Execution

[ExecutionCondition](#) defines the [Extension](#) API for programmatic, *conditional test execution*.

An [ExecutionCondition](#) is *evaluated* for each container (e.g., a test class) to determine if all the tests it contains should be executed based on the supplied [ExtensionContext](#). Similarly, an [ExecutionCondition](#) is *evaluated* for each test to determine if a given test method should be executed based on the supplied [ExtensionContext](#).

When multiple [ExecutionCondition](#) extensions are registered, a container or test is disabled as soon as one of the conditions returns *disabled*. Thus, there is no guarantee that a condition is evaluated because another extension might have already caused a container or test to be disabled. In other words, the evaluation works like the short-circuiting boolean OR operator.

See the source code of [DisabledCondition](#) and [@Disabled](#) for concrete examples.

5.3.1. Deactivating Conditions

Sometimes it can be useful to run a test suite *without* certain conditions being active. For example, you may wish to run tests even if they are annotated with [@Disabled](#) in order to see if they are still *broken*. To do this, provide a pattern for the `junit.jupiter.conditions.deactivate` *configuration parameter* to specify which conditions should be deactivated (i.e., not evaluated) for the current test run. The pattern can be supplied as a JVM system property, as a *configuration parameter* in the [LauncherDiscoveryRequest](#) that is passed to the [Launcher](#), or via the JUnit Platform configuration file (see [Configuration Parameters](#) for details).

For example, to deactivate JUnit's [@Disabled](#) condition, you can start your JVM with the following system property.

```
-Djunit.jupiter.conditions.deactivate=org.junit.*DisabledCondition
```

Pattern Matching Syntax

Refer to [Pattern Matching Syntax](#) for details.

5.4. Test Instance Pre-construct Callback

[TestInstancePreConstructCallback](#) defines the API for [Extensions](#) that wish to be invoked *prior* to test instances being constructed (by a constructor call or via [TestInstanceFactory](#)).

This extension provides a symmetric call to [TestInstancePreDestroyCallback](#) and is useful in combination with other extensions to prepare constructor parameters or keeping track of test instances and their lifecycle.



Accessing the test-scoped `ExtensionContext`

You may override the `getTestInstantiationExtensionContextScope(...)` method to return `TEST_METHOD` to make test-specific data available to your extension implementation or if you want to [keep state](#) on the test method level.

5.5. Test Instance Factories

`TestInstanceFactory` defines the API for `Extensions` that wish to *create* test class instances.

Common use cases include acquiring the test instance from a dependency injection framework or invoking a static factory method to create the test class instance.

If no `TestInstanceFactory` is registered, the framework will invoke the *sole* constructor for the test class to instantiate it, potentially resolving constructor arguments via registered `ParameterResolver` extensions.

Extensions that implement `TestInstanceFactory` can be registered on test interfaces, top-level test classes, or `@Nested` test classes.



Registering multiple extensions that implement `TestInstanceFactory` for any single class will result in an exception being thrown for all tests in that class, in any subclass, and in any nested class. Note that any `TestInstanceFactory` registered in a superclass or *enclosing* class (i.e., in the case of a `@Nested` test class) is *inherited*. It is the user's responsibility to ensure that only a single `TestInstanceFactory` is registered for any specific test class.



Accessing the test-scoped `ExtensionContext`

You may override the `getTestInstantiationExtensionContextScope(...)` method to return `TEST_METHOD` to make test-specific data available to your extension implementation or if you want to [keep state](#) on the test method level.

5.6. Test Instance Post-processing

`TestInstancePostProcessor` defines the API for `Extensions` that wish to *post process* test instances.

Common use cases include injecting dependencies into the test instance, invoking custom initialization methods on the test instance, etc.

For a concrete example, consult the source code for the `MockitoExtension` and the `SpringExtension`.



Accessing the test-scoped `ExtensionContext`

You may override the `getTestInstantiationExtensionContextScope(...)` method to return `TEST_METHOD` to make test-specific data available to your extension implementation or if you want to [keep state](#) on the test method level.

5.7. Test Instance Pre-destroy Callback

[TestInstancePreDestroyCallback](#) defines the API for [Extensions](#) that wish to process test instances *after* they have been used in tests and *before* they are destroyed.

Common use cases include cleaning dependencies that have been injected into the test instance, invoking custom de-initialization methods on the test instance, etc.

5.8. Parameter Resolution

[ParameterResolver](#) defines the [Extension](#) API for dynamically resolving parameters at runtime.

If a *test class* constructor, *test method*, or *lifecycle method* (see [Definitions](#)) declares a parameter, the parameter must be *resolved* at runtime by a [ParameterResolver](#). A [ParameterResolver](#) can either be built-in (see [TestInfoParameterResolver](#)) or [registered by the user](#). Generally speaking, parameters may be resolved by *name*, *type*, *annotation*, or any combination thereof.

If you wish to implement a custom [ParameterResolver](#) that resolves parameters based solely on the type of the parameter, you may find it convenient to extend the [TypeBasedParameterResolver](#) which serves as a generic adapter for such use cases.

For concrete examples, consult the source code for [CustomTypeParameterResolver](#), [CustomAnnotationParameterResolver](#), and [MapOfListsTypeBasedParameterResolver](#).



Due to a bug in the byte code generated by `javac` on JDK versions prior to JDK 9, looking up annotations on parameters directly via the core `java.lang.reflect.Parameter` API will always fail for *inner class* constructors (e.g., a constructor in a `@Nested` test class).

The [ParameterContext](#) API supplied to [ParameterResolver](#) implementations therefore includes the following convenience methods for correctly looking up annotations on parameters. Extension authors are strongly encouraged to use these methods instead of those provided in `java.lang.reflect.Parameter` in order to avoid this bug in the JDK.

- `boolean isAnnotated(Class<? extends Annotation> annotationType)`
- `Optional<A> findAnnotation(Class<A> annotationType)`
- `List<A> findRepeatableAnnotations(Class<A> annotationType)`

Accessing the test-scoped [ExtensionContext](#)



You may override the `getTestInstantiationExtensionContextScope(...)` method to return `TEST_METHOD` to support injecting test specific data into constructor parameters of the test class instance. Doing so causes a test-specific [ExtensionContext](#) to be used while resolving constructor parameters, unless the [test instance lifecycle](#) is set to `PER_CLASS`.



Parameter resolution for methods called from extensions

Other extensions can also leverage registered `ParameterResolvers` for method and constructor invocations, using the `ExecutableInvoker` available via the `getExecutableInvoker()` method in the `ExtensionContext`.

5.8.1. Parameter Conflicts

If multiple implementations of `ParameterResolver` that support the same type are registered for a test, a `ParameterResolutionException` will be thrown, with a message to indicate that competing resolvers have been discovered. See the following example:

Conflicting parameter resolution due to multiple resolvers claiming support for integers

```
public class ParameterResolverConflictDemo {

    @Test
    @ExtendWith({ FirstIntegerResolver.class, SecondIntegerResolver.class })
    void testInt(int i) {
        // Test will not run due to ParameterResolutionException
        assertEquals(1, i);
    }

    static class FirstIntegerResolver implements ParameterResolver {

        @Override
        public boolean supportsParameter(ParameterContext parameterContext,
            ExtensionContext extensionContext) {
            return parameterContext.getParameter().getType() == int.class;
        }

        @Override
        public Object resolveParameter(ParameterContext parameterContext,
            ExtensionContext extensionContext) {
            return 1;
        }
    }

    static class SecondIntegerResolver implements ParameterResolver {

        @Override
        public boolean supportsParameter(ParameterContext parameterContext,
            ExtensionContext extensionContext) {
            return parameterContext.getParameter().getType() == int.class;
        }

        @Override
        public Object resolveParameter(ParameterContext parameterContext,
            ExtensionContext extensionContext) {
            return 2;
        }
    }
}
```

```
}
```

If the conflicting `ParameterResolver` implementations are applied to different test methods as shown in the following example, no conflict occurs.

Fine-grained registration to avoid conflict

```
public class ParameterResolverNoConflictDemo {

    @Test
    @ExtendWith(FirstIntegerResolver.class)
    void firstResolution(int i) {
        assertEquals(1, i);
    }

    @Test
    @ExtendWith(SecondIntegerResolver.class)
    void secondResolution(int i) {
        assertEquals(2, i);
    }

    static class FirstIntegerResolver implements ParameterResolver {

        @Override
        public boolean supportsParameter(ParameterContext parameterContext,
            ExtensionContext extensionContext) {
            return parameterContext.getParameter().getType() == int.class;
        }

        @Override
        public Object resolveParameter(ParameterContext parameterContext,
            ExtensionContext extensionContext) {
            return 1;
        }
    }

    static class SecondIntegerResolver implements ParameterResolver {

        @Override
        public boolean supportsParameter(ParameterContext parameterContext,
            ExtensionContext extensionContext) {
            return parameterContext.getParameter().getType() == int.class;
        }

        @Override
        public Object resolveParameter(ParameterContext parameterContext,
            ExtensionContext extensionContext) {
            return 2;
        }
    }
}
```

```
}
```

If the conflicting `ParameterResolver` implementations need to be applied to the same test method, you can implement a custom type or custom annotation as illustrated by `CustomTypeParameterResolver` and `CustomAnnotationParameterResolver`, respectively.

Custom type to resolve duplicate types

```
public class ParameterResolverCustomTypeDemo {

    @Test
    @ExtendWith({ FirstIntegerResolver.class, SecondIntegerResolver.class })
    void testInt(Integer i, WrappedInteger wrappedInteger) {
        assertEquals(1, i);
        assertEquals(2, wrappedInteger.value);
    }

    static class FirstIntegerResolver implements ParameterResolver {

        @Override
        public boolean supportsParameter(ParameterContext parameterContext,
            ExtensionContext extensionContext) {
            return parameterContext.getParameter().getType().equals(Integer.class);
        }

        @Override
        public Object resolveParameter(ParameterContext parameterContext,
            ExtensionContext extensionContext) {
            return 1;
        }
    }

    static class SecondIntegerResolver implements ParameterResolver {

        @Override
        public boolean supportsParameter(ParameterContext parameterContext,
            ExtensionContext extensionContext) {
            return parameterContext.getParameter().getType().equals(WrappedInteger
                .class);
        }

        @Override
        public Object resolveParameter(ParameterContext parameterContext,
            ExtensionContext extensionContext) {
            return new WrappedInteger(2);
        }
    }

    static class WrappedInteger {
```

```

        private final int value;

        public WrappedInteger(int value) {
            this.value = value;
        }
    }
}

```

A custom annotation makes the duplicate type distinguishable from its counterpart:

Custom annotation to resolve duplicate types

```

public class ParameterResolverCustomAnnotationDemo {

    @Test
    void testInt(@FirstInteger Integer first, @SecondInteger Integer second) {
        assertEquals(1, first);
        assertEquals(2, second);
    }

    @Target(ElementType.PARAMETER)
    @Retention(RetentionPolicy.RUNTIME)
    @ExtendWith(FirstInteger.Extension.class)
    public @interface FirstInteger {

        class Extension implements ParameterResolver {

            @Override
            public boolean supportsParameter(ParameterContext parameterContext,
                ExtensionContext extensionContext) {
                return parameterContext.getParameter().getType().equals(Integer.class)
                    && !parameterContext.isAnnotated(SecondInteger.class);
            }

            @Override
            public Object resolveParameter(ParameterContext parameterContext,
                ExtensionContext extensionContext) {
                return 1;
            }
        }
    }

    @Target(ElementType.PARAMETER)
    @Retention(RetentionPolicy.RUNTIME)
    @ExtendWith(SecondInteger.Extension.class)
    public @interface SecondInteger {

        class Extension implements ParameterResolver {

            @Override

```

```

        public boolean supportsParameter(ParameterContext parameterContext,
ExtensionContext extensionContext) {
            return parameterContext.isAnnotated(SecondInteger.class);
        }

        @Override
        public Object resolveParameter(ParameterContext parameterContext,
ExtensionContext extensionContext) {
            return 2;
        }
    }
}

```

JUnit includes some built-in parameter resolvers that can cause conflicts if a resolver attempts to claim their supported types. For example, [TestInfo](#) provides metadata about tests. See [Dependency Injection for Constructors and Methods](#) for details. Third-party frameworks such as Spring may also define parameter resolvers. Apply one of the techniques in this section to resolve any conflicts.

Parameterized tests are another potential source of conflict. Ensure that tests annotated with `@ParameterizedTest` are not also annotated with `@Test` and see [Consuming Arguments](#) for more details.

5.9. Test Result Processing

[TestWatcher](#) defines the API for extensions that wish to process the results of *test method* executions. Specifically, a [TestWatcher](#) will be invoked with contextual information for the following events.

- `testDisabled`: invoked after a disabled *test method* has been skipped
- `testSuccessful`: invoked after a *test method* has completed successfully
- `testAborted`: invoked after a *test method* has been aborted
- `testFailed`: invoked after a *test method* has failed



In contrast to the definition of "test method" presented in [Definitions](#), in this context *test method* refers to any `@Test` method or `@TestTemplate` method (for example, a `@RepeatedTest` or `@ParameterizedTest`).

Extensions implementing this interface can be registered at the class level, instance level, or method level. When registered at the class level, a [TestWatcher](#) will be invoked for any contained *test method* including those in `@Nested` classes. When registered at the method level, a [TestWatcher](#) will only be invoked for the *test method* for which it was registered.



If a [TestWatcher](#) is registered via a non-static (instance) field – for example, using `@RegisterExtension` – and the test class is configured with `@TestInstance(Lifecycle.PER_METHOD)` semantics (which is the default lifecycle mode), the [TestWatcher](#) will **not** be invoked with events for `@TestTemplate` methods (for example, `@RepeatedTest` or `@ParameterizedTest`).

To ensure that a `TestWatcher` is invoked for all *test methods* in a given class, it is therefore recommended that the `TestWatcher` be registered at the class level with `@ExtendWith` or via a `static` field with `@RegisterExtension` or `@ExtendWith`.

If there is a failure at the class level — for example, an exception thrown by a `@BeforeAll` method — no test results will be reported. Similarly, if the test class is disabled via an `ExecutionCondition` — for example, `@Disabled` — no test results will be reported.

In contrast to other Extension APIs, a `TestWatcher` is not permitted to adversely influence the execution of tests. Consequently, any exception thrown by a method in the `TestWatcher` API will be logged at `WARNING` level and will not be allowed to propagate or fail test execution.



Any instances of `ExtensionContext.Store.CloseableResource` stored in the `Store` of the provided `ExtensionContext` will be closed *before* methods in the `TestWatcher` API are invoked (see [Keeping State in Extensions](#)). You can use the parent context's `Store` to work with such resources.

5.10. Test Lifecycle Callbacks

The following interfaces define the APIs for extending tests at various points in the test execution lifecycle. Consult the following sections for examples and the Javadoc for each of these interfaces in the `org.junit.jupiter.api.extension` package for further details.

- [BeforeAllCallback](#)
 - [BeforeEachCallback](#)
 - [BeforeTestExecutionCallback](#)
 - [AfterTestExecutionCallback](#)
 - [AfterEachCallback](#)
- [AfterAllCallback](#)



Implementing Multiple Extension APIs

Extension developers may choose to implement any number of these interfaces within a single extension. Consult the source code of the [SpringExtension](#) for a concrete example.

5.10.1. Before and After Test Execution Callbacks

[BeforeTestExecutionCallback](#) and [AfterTestExecutionCallback](#) define the APIs for `Extensions` that wish to add behavior that will be executed *immediately before* and *immediately after* a test method is executed, respectively. As such, these callbacks are well suited for timing, tracing, and similar use cases. If you need to implement callbacks that are invoked *around* `@BeforeEach` and `@AfterEach` methods, implement [BeforeEachCallback](#) and [AfterEachCallback](#) instead.

The following example shows how to use these callbacks to calculate and log the execution time of a test method. [TimingExtension](#) implements both [BeforeTestExecutionCallback](#) and

`AfterTestExecutionCallback` in order to time and log the test execution.

An extension that times and logs the execution of test methods

```
import java.lang.reflect.Method;
import java.util.logging.Logger;

import org.junit.jupiter.api.extension.AfterTestExecutionCallback;
import org.junit.jupiter.api.extension.BeforeTestExecutionCallback;
import org.junit.jupiter.api.extension.ExtensionContext;
import org.junit.jupiter.api.extension.ExtensionContext.Namespace;
import org.junit.jupiter.api.extension.ExtensionContext.Store;

public class TimingExtension implements BeforeTestExecutionCallback,
AfterTestExecutionCallback {

    private static final Logger logger = Logger.getLogger(TimingExtension.class
.getName());

    private static final String START_TIME = "start time";

    @Override
    public void beforeTestExecution(ExtensionContext context) throws Exception {
        getStore(context).put(START_TIME, System.currentTimeMillis());
    }

    @Override
    public void afterTestExecution(ExtensionContext context) throws Exception {
        Method testMethod = context.getRequiredTestMethod();
        long startTime = getStore(context).remove(START_TIME, long.class);
        long duration = System.currentTimeMillis() - startTime;

        logger.info(() ->
            String.format("Method [%s] took %s ms.", testMethod.getName(), duration));
    }

    private Store getStore(ExtensionContext context) {
        return context.getStore(Namespace.create(getClass(), context
.getRequiredTestMethod()));
    }
}
```

Since the `TimingExtensionTests` class registers the `TimingExtension` via `@ExtendWith`, its tests will have this timing applied when they execute.

A test class that uses the example `TimingExtension`

```
@ExtendWith(TimingExtension.class)
class TimingExtensionTests {
```

```

@Test
void sleep20ms() throws Exception {
    Thread.sleep(20);
}

@Test
void sleep50ms() throws Exception {
    Thread.sleep(50);
}
}

```

The following is an example of the logging produced when `TimingExtensionTests` is run.

```

INFO: Method [sleep20ms] took 24 ms.
INFO: Method [sleep50ms] took 53 ms.

```

5.11. Exception Handling

Exceptions thrown during the test execution may be intercepted and handled accordingly before propagating further, so that certain actions like error logging or resource releasing may be defined in specialized `Extensions`. JUnit Jupiter offers API for `Extensions` that wish to handle exceptions thrown during `@Test` methods via `TestExecutionExceptionHandler` and for those thrown during one of test lifecycle methods (`@BeforeAll`, `@BeforeEach`, `@AfterEach` and `@AfterAll`) via `LifecycleMethodExecutionExceptionHandler`.

The following example shows an extension which will swallow all instances of `IOException` but rethrow any other type of exception.

An exception handling extension that filters `IOExceptions` in test execution

```

public class IgnoreIOExceptionExtension implements TestExecutionExceptionHandler {

    @Override
    public void handleTestExecutionException(ExtensionContext context, Throwable
throwable)
        throws Throwable {

        if (throwable instanceof IOException) {
            return;
        }
        throw throwable;
    }
}

```

Another example shows how to record the state of an application under test exactly at the point of unexpected exception being thrown during setup and cleanup. Note that unlike relying on lifecycle

callbacks, which may or may not be executed depending on the test status, this solution guarantees execution immediately after failing `@BeforeAll`, `@BeforeEach`, `@AfterEach` or `@AfterAll`.

An exception handling extension that records application state on error

```
class RecordStateOnErrorExtension implements LifecycleMethodExecutionExceptionHandler
{
    @Override
    public void handleBeforeAllMethodExecutionException(ExtensionContext context,
        Throwable ex)
        throws Throwable {
        memoryDumpForFurtherInvestigation("Failure recorded during class setup");
        throw ex;
    }

    @Override
    public void handleBeforeEachMethodExecutionException(ExtensionContext context,
        Throwable ex)
        throws Throwable {
        memoryDumpForFurtherInvestigation("Failure recorded during test setup");
        throw ex;
    }

    @Override
    public void handleAfterEachMethodExecutionException(ExtensionContext context,
        Throwable ex)
        throws Throwable {
        memoryDumpForFurtherInvestigation("Failure recorded during test cleanup");
        throw ex;
    }

    @Override
    public void handleAfterAllMethodExecutionException(ExtensionContext context,
        Throwable ex)
        throws Throwable {
        memoryDumpForFurtherInvestigation("Failure recorded during class cleanup");
        throw ex;
    }
}
```

Multiple execution exception handlers may be invoked for the same lifecycle method in order of declaration. If one of the handlers swallows the handled exception, subsequent ones will not be executed, and no failure will be propagated to JUnit engine, as if the exception was never thrown. Handlers may also choose to rethrow the exception or throw a different one, potentially wrapping the original.

Extensions implementing `LifecycleMethodExecutionExceptionHandler` that wish to handle exceptions thrown during `@BeforeAll` or `@AfterAll` need to be registered on a class level, while handlers for `BeforeEach` and `AfterEach` may be also registered for individual test methods.

```
// Register handlers for @Test, @BeforeEach, @AfterEach as well as @BeforeAll and
// @AfterAll
@ExtendWith(ThirdExecutedHandler.class)
class MultipleHandlersTestCase {

    // Register handlers for @Test, @BeforeEach, @AfterEach only
    @ExtendWith(SecondExecutedHandler.class)
    @ExtendWith(FirstExecutedHandler.class)
    @Test
    void testMethod() {
    }

}
```

5.12. Pre-Interrupt Callback

`PreInterruptCallback` defines the API for `Extensions` that wish to react on timeouts before the `Thread.interrupt()` is called.

Please refer to [Debugging Timeouts](#) for additional information.

5.13. Intercepting Invocations

`InvocationInterceptor` defines the API for `Extensions` that wish to intercept calls to test code.

The following example shows an extension that executes all test methods in Swing's Event Dispatch Thread.

An extension that executes tests in a user-defined thread

```
public class SwingEdtInterceptor implements InvocationInterceptor {

    @Override
    public void interceptTestMethod(Invocation<Void> invocation,
        ReflectiveInvocationContext<Method> invocationContext,
        ExtensionContext extensionContext) throws Throwable {

        AtomicReference<Throwable> throwable = new AtomicReference<>();

        SwingUtilities.invokeAndWait(() -> {
            try {
                invocation.proceed();
            }
            catch (Throwable t) {
                throwable.set(t);
            }
        });
    }
}
```

```

        Throwable t = throwable.get();
        if (t != null) {
            throw t;
        }
    }
}

```



Accessing the test-scoped `ExtensionContext`

You may override the `getTestInstantiationExtensionContextScope(...)` method to return `TEST_METHOD` to make test-specific data available to your extension implementation of `interceptTestClassConstructor` or if you want to [keep state](#) on the test method level.

5.14. Providing Invocation Contexts for Test Templates

A `@TestTemplate` method can only be executed when at least one `TestTemplateInvocationContextProvider` is registered. Each such provider is responsible for providing a `Stream` of `TestTemplateInvocationContext` instances. Each context may specify a custom display name and a list of additional extensions that will only be used for the next invocation of the `@TestTemplate` method.

The following example shows how to write a test template as well as how to register and implement a `TestTemplateInvocationContextProvider`.

A test template with accompanying extension

```

final List<String> fruits = Arrays.asList("apple", "banana", "lemon");

@TestTemplate
@ExtendWith(MyTestTemplateInvocationContextProvider.class)
void testTemplate(String fruit) {
    assertTrue(fruits.contains(fruit));
}

public class MyTestTemplateInvocationContextProvider
    implements TestTemplateInvocationContextProvider {

    @Override
    public boolean supportsTestTemplate(ExtensionContext context) {
        return true;
    }

    @Override
    public Stream<TestTemplateInvocationContext>
    provideTestTemplateInvocationContexts(
        ExtensionContext context) {

        return Stream.of(invocationContext("apple"), invocationContext("banana"));
    }
}

```

```

private TestTemplateInvocationContext invocationContext(String parameter) {
    return new TestTemplateInvocationContext() {
        @Override
        public String getDisplayName(int invocationIndex) {
            return parameter;
        }

        @Override
        public List<Extension> getAdditionalExtensions() {
            return Collections.singletonList(new ParameterResolver() {
                @Override
                public boolean supportsParameter(ParameterContext
parameterContext,
                    ExtensionContext extensionContext) {
                    return parameterContext.getParameter().getType().equals(
String.class);
                }

                @Override
                public Object resolveParameter(ParameterContext parameterContext,
                    ExtensionContext extensionContext) {
                    return parameter;
                }
            });
        }
    };
}

```

In this example, the test template will be invoked twice. The display names of the invocations will be `apple` and `banana` as specified by the invocation context. Each invocation registers a custom `ParameterResolver` which is used to resolve the method parameter. The output when using the `ConsoleLauncher` is as follows.

```

└─ testTemplate(String) ✓
  └─ apple ✓
    └─ banana ✓

```

The `TestTemplateInvocationContextProvider` extension API is primarily intended for implementing different kinds of tests that rely on repetitive invocation of a test-like method albeit in different contexts — for example, with different parameters, by preparing the test class instance differently, or multiple times without modifying the context. Please refer to the implementations of [Repeated Tests](#) or [Parameterized Tests](#) which use this extension point to provide their functionality.

5.15. Keeping State in Extensions

Usually, an extension is instantiated only once. So the question becomes relevant: How do you keep

the state from one invocation of an extension to the next? The `ExtensionContext` API provides a `Store` exactly for this purpose. Extensions may put values into a store for later retrieval. See the `TimingExtension` for an example of using the `Store` with a method-level scope. It is important to remember that values stored in an `ExtensionContext` during test execution will not be available in the surrounding `ExtensionContext`. Since `ExtensionContexts` may be nested, the scope of inner contexts may also be limited. Consult the corresponding Javadoc for details on the methods available for storing and retrieving values via the `Store`.



`ExtensionContext.Store.CloseableResource`

An extension context store is bound to its extension context lifecycle. When an extension context lifecycle ends it closes its associated store. All stored values that are instances of `CloseableResource` are notified by an invocation of their `close()` method in the inverse order they were added in.

An example implementation of `CloseableResource` is shown below, using an `HttpServer` resource.

`HttpServer` resource implementing `CloseableResource`

```
class HttpServerResource implements CloseableResource {

    private final HttpServer httpServer;

    HttpServerResource(int port) throws IOException {
        InetAddress loopbackAddress = InetAddress.getLoopbackAddress();
        this.httpServer = HttpServer.create(new InetSocketAddress(loopbackAddress,
port), 0);
    }

    HttpServer getHttpServer() {
        return httpServer;
    }

    void start() {
        // Example handler
        httpServer.createContext("/example", exchange -> {
            String body = "This is a test";
            exchange.sendResponseHeaders(200, body.length());
            try (OutputStream os = exchange.getResponseBody()) {
                os.write(body.getBytes(UTF_8));
            }
        });
        httpServer.setExecutor(null);
        httpServer.start();
    }

    @Override
    public void close() {
        httpServer.stop(0);
    }
}
```

```
}
```

This resource can then be stored in the desired `ExtensionContext`. It may be stored at class or method level, if desired, but this may add unnecessary overhead for this type of resource. For this example it might be prudent to store it at root level and instantiate it lazily to ensure it's only created once per test run and reused across different test classes and methods.

Lazily storing in root context with `Store.getOrComputeIfAbsent`

```
public class HttpServerExtension implements ParameterResolver {

    @Override
    public boolean supportsParameter(ParameterContext parameterContext,
        ExtensionContext extensionContext) {
        return HttpServer.class.equals(parameterContext.getParameter().getType());
    }

    @Override
    public Object resolveParameter(ParameterContext parameterContext, ExtensionContext
        extensionContext) {

        ExtensionContext rootContext = extensionContext.getRoot();
        ExtensionContext.Store store = rootContext.getStore(Namespace.GLOBAL);
        String key = HttpServerResource.class.getName();
        HttpServerResource resource = store.getOrComputeIfAbsent(key, __ -> {
            try {
                HttpServerResource serverResource = new HttpServerResource(0);
                serverResource.start();
                return serverResource;
            }
            catch (IOException e) {
                throw new UncheckedIOException("Failed to create HttpServerResource",
                    e);
            }
        }, HttpServerResource.class);
        return resource.getHttpServer();
    }
}
```

A test case using the `HttpServerExtension`

```
@ExtendWith(HttpServerExtension.class)
public class HttpServerDemo {

    @Test
    void httpCall(HttpServer server) throws Exception {
        String hostName = server.getAddress().getHostName();
        int port = server.getAddress().getPort();
        String rawUrl = String.format("http://%s:%d/example", hostName, port);
        URL requestUrl = URI.create(rawUrl).toURL();
    }
}
```

```

String responseBody = sendRequest(requestUrl);

assertEquals("This is a test", responseBody);
}

private static String sendRequest(URL url) throws IOException {
    HttpURLConnection connection = (HttpURLConnection) url.openConnection();
    int contentLength = connection.getContentLength();
    try (InputStream response = url.openStream()) {
        byte[] content = new byte[contentLength];
        assertEquals(contentLength, response.read(content));
        return new String(content, UTF_8);
    }
}
}

```

5.16. Supported Utilities in Extensions

The `junit-platform-commons` artifact provides *maintained* utilities for working with annotations, classes, reflection, classpath scanning, and conversion tasks. These utilities can be found in the `org.junit.platform.commons.support` and its subpackages. `TestEngine` and `Extension` authors are encouraged to use these supported utilities in order to align with the behavior of the JUnit Platform and JUnit Jupiter.

5.16.1. Annotation Support

`AnnotationSupport` provides static utility methods that operate on annotated elements (e.g., packages, annotations, classes, interfaces, constructors, methods, and fields). These include methods to check whether an element is annotated or meta-annotated with a particular annotation, to search for specific annotations, and to find annotated methods and fields in a class or interface. Some of these methods search on implemented interfaces and within class hierarchies to find annotations. Consult the Javadoc for `AnnotationSupport` for further details.



The `isAnnotated()` methods do not find repeatable annotations. To check for repeatable annotations, use one of the `findRepeatableAnnotations()` methods and verify that the returned list is not empty.



See also: [Field and Method Search Semantics](#)

5.16.2. Class Support

`ClassSupport` provides static utility methods for working with classes (i.e., instances of `java.lang.Class`). Consult the Javadoc for `ClassSupport` for further details.

5.16.3. Reflection Support

`ReflectionSupport` provides static utility methods that augment the standard JDK reflection and class-loading mechanisms. These include methods to scan the classpath in search of classes matching specified predicates, to load and create new instances of a class, and to find and invoke methods. Some of these methods traverse class hierarchies to locate matching methods. Consult the Javadoc for [ReflectionSupport](#) for further details.



See also: [Field and Method Search Semantics](#)

5.16.4. Modifier Support

`ModifierSupport` provides static utility methods for working with member and class modifiers—for example, to determine if a member is declared as `public`, `private`, `abstract`, `static`, etc. Consult the Javadoc for [ModifierSupport](#) for further details.

5.16.5. Conversion Support

`ConversionSupport` (in the `org.junit.platform.commons.support.conversion` package) provides support for converting from strings to primitive types and their corresponding wrapper types, date and time types from the `java.time` package, and some additional common Java types such as `File`, `BigDecimal`, `BigInteger`, `Currency`, `Locale`, `URI`, `URL`, `UUID`, etc. Consult the Javadoc for [ConversionSupport](#) for further details.

5.16.6. Field and Method Search Semantics

Various methods in `AnnotationSupport` and `ReflectionSupport` use search algorithms that traverse type hierarchies to locate matching fields and methods—for example, `AnnotationSupport.findAnnotatedFields(...)`, `ReflectionSupport.findMethods(...)`, etc.

As of JUnit 5.11 (JUnit Platform 1.11), field and method search algorithms adhere to standard Java semantics regarding whether a given field or method is visible or overridden according to the rules of the Java language.

Prior to JUnit 5.11, the field and method search algorithms applied what we now refer to as "legacy semantics". Legacy semantics consider fields and methods to be *hidden*, *shadowed*, or *superseded* by fields and methods in super types (superclasses or interfaces) based solely on the field's name or the method's signature, disregarding the actual Java language semantics for visibility and the rules that determine if one method overrides another method.

Although the JUnit team recommends the use of the standard search semantics, developers may optionally revert to the legacy semantics via the `junit.platform.reflection.search.useLegacySemantics` JVM system property.

For example, to enable legacy search semantics for fields and methods, you can start your JVM with the following system property.

```
-Djunit.platform.reflection.search.useLegacySemantics=true
```




Due to the low-level nature of the feature, the `junit.platform.reflection.search.useLegacySemantics` flag can only be set via a JVM system property. It cannot be set via a [configuration parameter](#).

5.17. Relative Execution Order of User Code and Extensions

When executing a test class that contains one or more test methods, a number of extension callbacks are called in addition to the user-supplied test and lifecycle methods.



See also: [Test Execution Order](#)

5.17.1. User and Extension Code

The following diagram illustrates the relative order of user-supplied code and extension code. User-supplied test and lifecycle methods are shown in orange, with callback code implemented by extensions shown in blue. The grey box denotes the execution of a single test method and will be repeated for every test method in the test class.

BeforeAllCallback (1)

@BeforeAll (2)

LifecycleMethodExecutionExceptionHandler
#handleBeforeAllMethodExecutionException (3)

BeforeEachCallback (4)

@BeforeEach (5)

LifecycleMethodExecutionExceptionHandler
#handleBeforeEachMethodExecutionException (6)

BeforeTestExecutionCallback (7)

@Test (8)

TestExecutionExceptionHandler (9)

AfterTestExecutionCallback (10)

@AfterEach (11)

LifecycleMethodExecutionExceptionHandler
#handleAfterEachMethodExecutionException (12)

AfterEachCallback (13)

@AfterAll (14)

LifecycleMethodExecutionExceptionHandler
#handleAfterAllMethodExecutionException (15)

AfterAllCallback (16)

Extension code

User code

User code and extension code

The following table further explains the sixteen steps in the [User code and extension code](#) diagram.

Step	Interface/Annotation	Description
1	interface <code>org.junit.jup iter.api.exte nsion.BeforeA llCallback</code>	extension code executed before all tests of the container are executed
2	annotation <code>org.junit.jup iter.api.Befo reAll</code>	user code executed before all tests of the container are executed

Step	Interface/Annotation	Description
3	interface org.junit.jupiter.api.extension.LifecycleMethodExecutionExceptionHandler #handleBeforeAllMethodExecutionException	extension code for handling exceptions thrown from @BeforeAll methods
4	interface org.junit.jupiter.api.extension.BeforeEachCallback	extension code executed before each test is executed
5	annotation org.junit.jupiter.api.BeforeEach	user code executed before each test is executed
6	interface org.junit.jupiter.api.extension.LifecycleMethodExecutionExceptionHandler #handleBeforeEachMethodExecutionException	extension code for handling exceptions thrown from @BeforeEach methods
7	interface org.junit.jupiter.api.extension.BeforeTestExecutionCallback	extension code executed immediately before a test is executed
8	annotation org.junit.jupiter.api.Test	user code of the actual test method
9	interface org.junit.jupiter.api.extension.TestExecutionExceptionHandler	extension code for handling exceptions thrown during a test

Step	Interface/Annotation	Description
10	interface <code>org.junit.jupiter.api.extension.AfterTestExecutionCallback</code>	extension code executed immediately after test execution and its corresponding exception handlers
11	annotation <code>org.junit.jupiter.api.AfterEach</code>	user code executed after each test is executed
12	interface <code>org.junit.jupiter.api.extension.LifecycleMethodExecutionExceptionHandler</code> <code>#handleAfterEachMethodExecutionException</code>	extension code for handling exceptions thrown from <code>@AfterEach</code> methods
13	interface <code>org.junit.jupiter.api.extension.AfterEachCallback</code>	extension code executed after each test is executed
14	annotation <code>org.junit.jupiter.api.AfterAll</code>	user code executed after all tests of the container are executed
15	interface <code>org.junit.jupiter.api.extension.LifecycleMethodExecutionExceptionHandler</code> <code>#handleAfterAllMethodExecutionException</code>	extension code for handling exceptions thrown from <code>@AfterAll</code> methods
16	interface <code>org.junit.jupiter.api.extension.AfterAllCallback</code>	extension code executed after all tests of the container are executed

In the simplest case only the actual test method will be executed (step 8); all other steps are optional depending on the presence of user code or extension support for the corresponding lifecycle callback. For further details on the various lifecycle callbacks please consult the respective Javadoc for each annotation and extension.

All invocations of user code methods in the above table can additionally be intercepted by implementing `InvocationInterceptor`.

5.17.2. Wrapping Behavior of Callbacks

JUnit Jupiter always guarantees *wrapping* behavior for multiple registered extensions that implement lifecycle callbacks such as `BeforeAllCallback`, `AfterAllCallback`, `BeforeEachCallback`, `AfterEachCallback`, `BeforeTestExecutionCallback`, and `AfterTestExecutionCallback`.

That means that, given two extensions `Extension1` and `Extension2` with `Extension1` registered before `Extension2`, any "before" callbacks implemented by `Extension1` are guaranteed to execute **before** any "before" callbacks implemented by `Extension2`. Similarly, given the two same two extensions registered in the same order, any "after" callbacks implemented by `Extension1` are guaranteed to execute **after** any "after" callbacks implemented by `Extension2`. `Extension1` is therefore said to *wrap* `Extension2`.

JUnit Jupiter also guarantees *wrapping* behavior within class and interface hierarchies for user-supplied *lifecycle methods* (see [Definitions](#)).

- `@BeforeAll` methods are inherited from superclasses as long as they are not *overridden*. Furthermore, `@BeforeAll` methods from superclasses will be executed **before** `@BeforeAll` methods in subclasses.
 - Similarly, `@BeforeAll` methods declared in an interface are inherited as long as they are not *overridden*, and `@BeforeAll` methods from an interface will be executed **before** `@BeforeAll` methods in the class that implements the interface.
- `@AfterAll` methods are inherited from superclasses as long as they are not *overridden*. Furthermore, `@AfterAll` methods from superclasses will be executed **after** `@AfterAll` methods in subclasses.
 - Similarly, `@AfterAll` methods declared in an interface are inherited as long as they are not *overridden*, and `@AfterAll` methods from an interface will be executed **after** `@AfterAll` methods in the class that implements the interface.
- `@BeforeEach` methods are inherited from superclasses as long as they are not *overridden*. Furthermore, `@BeforeEach` methods from superclasses will be executed **before** `@BeforeEach` methods in subclasses.
 - Similarly, `@BeforeEach` methods declared as interface default methods are inherited as long as they are not *overridden*, and `@BeforeEach` default methods will be executed **before** `@BeforeEach` methods in the class that implements the interface.
- `@AfterEach` methods are inherited from superclasses as long as they are not *overridden*. Furthermore, `@AfterEach` methods from superclasses will be executed **after** `@AfterEach` methods in subclasses.
 - Similarly, `@AfterEach` methods declared as interface default methods are inherited as long as they are not *overridden*, and `@AfterEach` default methods will be executed **after** `@AfterEach` methods in the class that implements the interface.

The following examples demonstrate this behavior. Please note that the examples do not actually do anything realistic. Instead, they mimic common scenarios for testing interactions with the

database. All methods imported statically from the `Logger` class log contextual information in order to help us better understand the execution order of user-supplied callback methods and callback methods in extensions.

Extension1

```
import static example.callbacks.Logger.afterEachCallback;
import static example.callbacks.Logger.beforeEachCallback;

import org.junit.jupiter.api.extension.AfterEachCallback;
import org.junit.jupiter.api.extension.BeforeEachCallback;
import org.junit.jupiter.api.extension.ExtensionContext;

public class Extension1 implements BeforeEachCallback, AfterEachCallback {

    @Override
    public void beforeEach(ExtensionContext context) {
        beforeEachCallback(this);
    }

    @Override
    public void afterEach(ExtensionContext context) {
        afterEachCallback(this);
    }

}
```

Extension2

```
import static example.callbacks.Logger.afterEachCallback;
import static example.callbacks.Logger.beforeEachCallback;

import org.junit.jupiter.api.extension.AfterEachCallback;
import org.junit.jupiter.api.extension.BeforeEachCallback;
import org.junit.jupiter.api.extension.ExtensionContext;

public class Extension2 implements BeforeEachCallback, AfterEachCallback {

    @Override
    public void beforeEach(ExtensionContext context) {
        beforeEachCallback(this);
    }

    @Override
    public void afterEach(ExtensionContext context) {
        afterEachCallback(this);
    }

}
```

AbstractDatabaseTests

```
import static example.callbacks.Logger.afterAllMethod;
import static example.callbacks.Logger.afterEachMethod;
import static example.callbacks.Logger.beforeAllMethod;
import static example.callbacks.Logger.beforeEachMethod;

import org.junit.jupiter.api.AfterAll;
import org.junit.jupiter.api.AfterEach;
import org.junit.jupiter.api.BeforeAll;
import org.junit.jupiter.api.BeforeEach;

/**
 * Abstract base class for tests that use the database.
 */
abstract class AbstractDatabaseTests {

    @BeforeAll
    static void createDatabase() {
        beforeAllMethod(AbstractDatabaseTests.class.getSimpleName() +
            ".createDatabase()");
    }

    @BeforeEach
    void connectToDatabase() {
        beforeEachMethod(AbstractDatabaseTests.class.getSimpleName() +
            ".connectToDatabase()");
    }

    @AfterEach
    void disconnectFromDatabase() {
        afterEachMethod(AbstractDatabaseTests.class.getSimpleName() +
            ".disconnectFromDatabase()");
    }

    @AfterAll
    static void destroyDatabase() {
        afterAllMethod(AbstractDatabaseTests.class.getSimpleName() +
            ".destroyDatabase()");
    }
}
```

DatabaseTestsDemo

```
import static example.callbacks.Logger.afterEachMethod;
import static example.callbacks.Logger.beforeAllMethod;
import static example.callbacks.Logger.beforeEachMethod;
import static example.callbacks.Logger.testMethod;
```

```

import org.junit.jupiter.api.AfterAll;
import org.junit.jupiter.api.AfterEach;
import org.junit.jupiter.api.BeforeAll;
import org.junit.jupiter.api.BeforeEach;
import org.junit.jupiter.api.Test;
import org.junit.jupiter.api.extension.ExtendWith;

/**
 * Extension of {@link AbstractDatabaseTests} that inserts test data
 * into the database (after the database connection has been opened)
 * and deletes test data (before the database connection is closed).
 */
@ExtendWith({ Extension1.class, Extension2.class })
class DatabaseTestsDemo extends AbstractDatabaseTests {

    @BeforeAll
    static void beforeAll() {
        beforeAllMethod(DatabaseTestsDemo.class.getSimpleName() + ".beforeAll()");
    }

    @BeforeEach
    void insertTestDataIntoDatabase() {
        beforeEachMethod(getClass().getSimpleName() +
".insertTestDataIntoDatabase()");
    }

    @Test
    void testDatabaseFunctionality() {
        testMethod(getClass().getSimpleName() + ".testDatabaseFunctionality()");
    }

    @AfterEach
    void deleteTestDataFromDatabase() {
        afterEachMethod(getClass().getSimpleName() + ".deleteTestDataFromDatabase()");
    }

    @AfterAll
    static void afterAll() {
        beforeAllMethod(DatabaseTestsDemo.class.getSimpleName() + ".afterAll()");
    }
}

```

When the `DatabaseTestsDemo` test class is executed, the following is logged.

```


@BeforeAll AbstractDatabaseTests.createDatabase()
@BeforeAll DatabaseTestsDemo.beforeAll()
    Extension1.beforeEach()
    Extension2.beforeEach()
    @BeforeEach AbstractDatabaseTests.connectToDatabase()

```



```
@BeforeEach DatabaseTestsDemo.insertTestDataIntoDatabase()  
    @Test DatabaseTestsDemo.testDatabaseFunctionality()  
    @AfterEach DatabaseTestsDemo.deleteTestDataFromDatabase()  
    @AfterEach AbstractDatabaseTests.disconnectFromDatabase()  
Extension2.afterEach()  
Extension1.afterEach()  
@BeforeAll DatabaseTestsDemo.afterAll()  
@AfterAll AbstractDatabaseTests.destroyDatabase()
```

The following sequence diagram helps to shed further light on what actually goes on within the `JupiterTestEngine` when the `DatabaseTestsDemo` test class is executed.

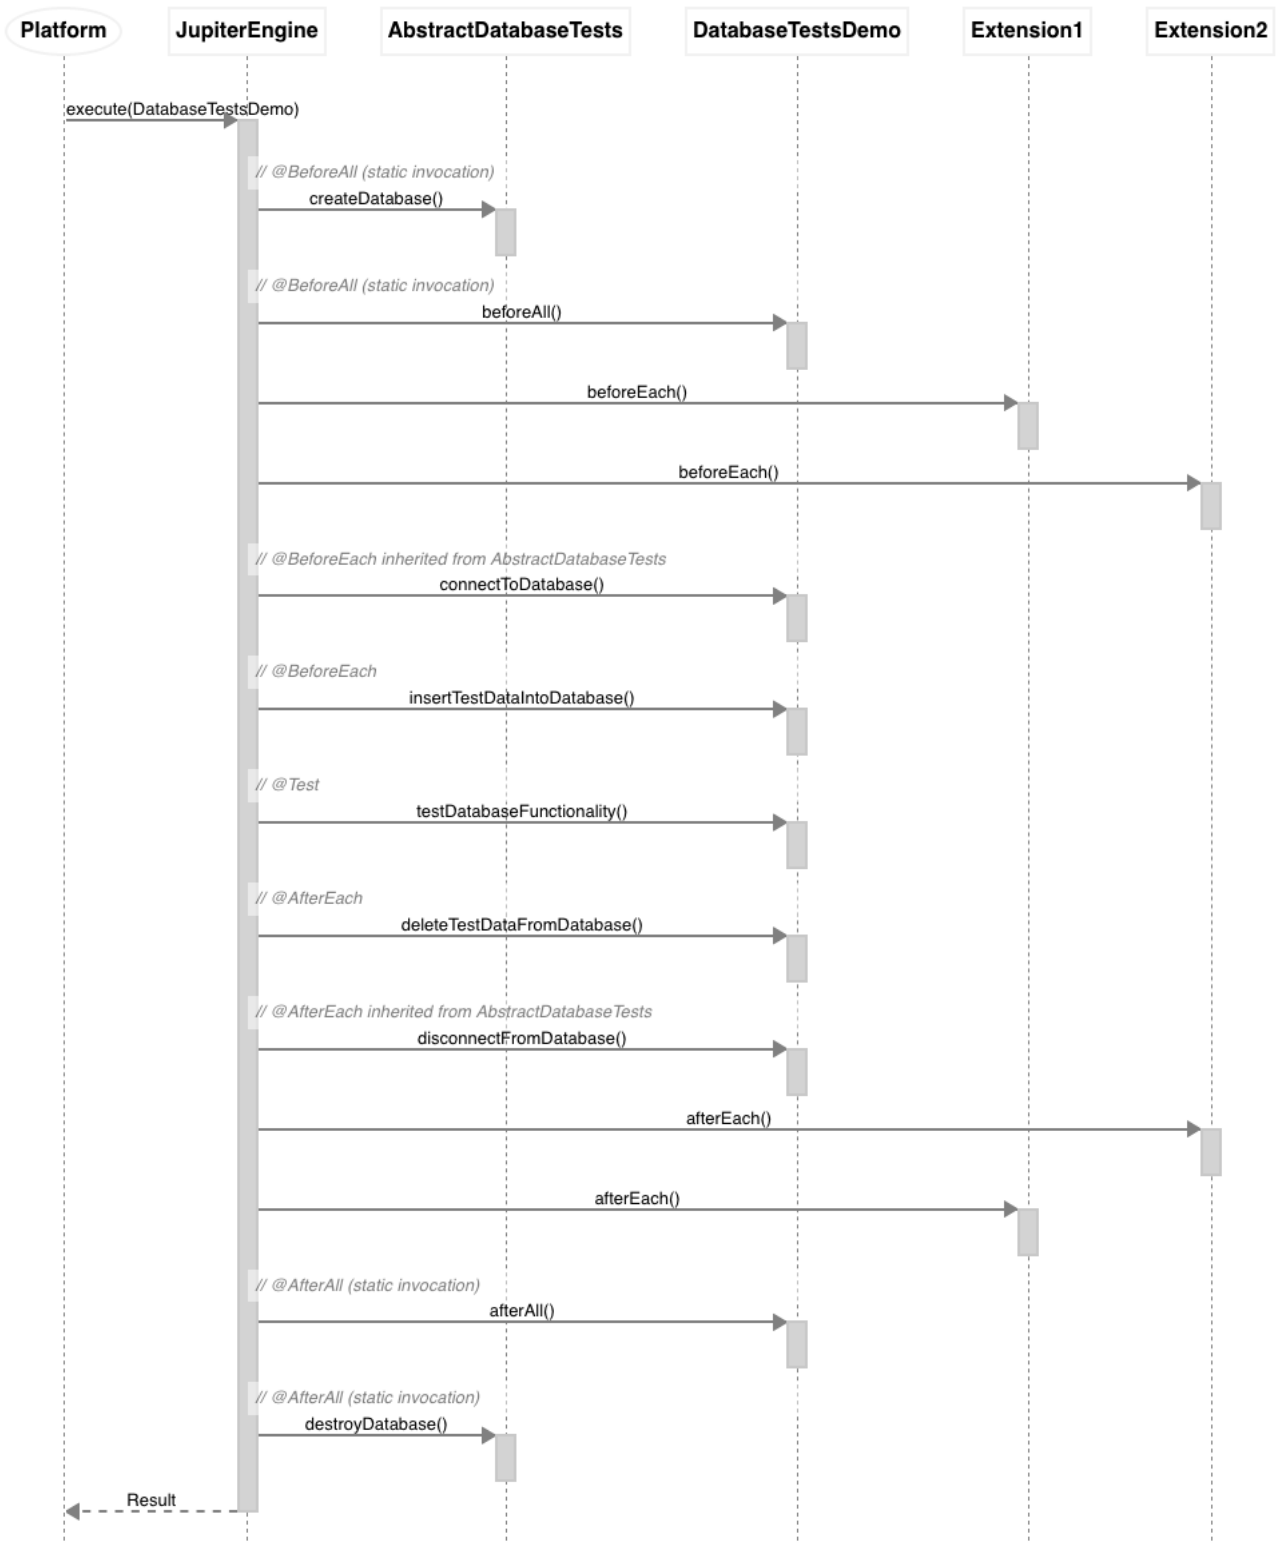

DatabaseTestsDemo

JUnit Jupiter does **not** guarantee the execution order of multiple lifecycle methods that are declared within a *single* test class or test interface. It may at times appear that JUnit Jupiter invokes such methods in alphabetical order. However, that is not precisely true. The ordering is analogous to the ordering for `@Test` methods within a single test class.



Lifecycle methods that are declared within a *single* test class or test interface will be ordered using an algorithm that is deterministic but intentionally non-obvious. This ensures that subsequent runs of a test suite execute lifecycle methods in the

same order, thereby allowing for repeatable builds.

In addition, JUnit Jupiter does **not** support *wrapping* behavior for multiple lifecycle methods declared within a single test class or test interface.

The following example demonstrates this behavior. Specifically, the lifecycle method configuration is *broken* due to the order in which the locally declared lifecycle methods are executed.

- Test data is inserted *before* the database connection has been opened, which results in a failure to connect to the database.
- The database connection is closed *before* deleting the test data, which results in a failure to connect to the database.

BrokenLifecycleMethodConfigDemo

```
import static example.callbacks.Logger.afterEachMethod;
import static example.callbacks.Logger.beforeEachMethod;
import static example.callbacks.Logger.testMethod;

import org.junit.jupiter.api.AfterEach;
import org.junit.jupiter.api.BeforeEach;
import org.junit.jupiter.api.Test;
import org.junit.jupiter.api.extension.ExtendWith;

/**
 * Example of "broken" lifecycle method configuration.
 *
 * <p>Test data is inserted before the database connection has been opened.
 *
 * <p>Database connection is closed before deleting test data.
 */
@ExtendWith({ Extension1.class, Extension2.class })
class BrokenLifecycleMethodConfigDemo {

    @BeforeEach
    void connectToDatabase() {
        beforeEachMethod(getClass().getSimpleName() + ".connectToDatabase()");
    }

    @BeforeEach
    void insertTestDataIntoDatabase() {
        beforeEachMethod(getClass().getSimpleName() +
".insertTestDataIntoDatabase()");
    }

    @Test
    void testDatabaseFunctionality() {
        testMethod(getClass().getSimpleName() + ".testDatabaseFunctionality()");
    }
}
```

```

@AfterEach
void deleteTestDataFromDatabase() {
    afterEachMethod(getClass().getSimpleName() + ".deleteTestDataFromDatabase()");
}

@AfterEach
void disconnectFromDatabase() {
    afterEachMethod(getClass().getSimpleName() + ".disconnectFromDatabase()");
}
}

```


When the `BrokenLifecycleMethodConfigDemo` test class is executed, the following is logged.

```

Extension1.beforeEach()
Extension2.beforeEach()
@BeforeEach BrokenLifecycleMethodConfigDemo.insertTestDataIntoDatabase()
@BeforeEach BrokenLifecycleMethodConfigDemo.connectToDatabase()
@Test BrokenLifecycleMethodConfigDemo.testDatabaseFunctionality()
@AfterEach BrokenLifecycleMethodConfigDemo.disconnectFromDatabase()
@AfterEach BrokenLifecycleMethodConfigDemo.deleteTestDataFromDatabase()
Extension2.afterEach()
Extension1.afterEach()

```

The following sequence diagram helps to shed further light on what actually goes on within the `JupiterTestEngine` when the `BrokenLifecycleMethodConfigDemo` test class is executed.

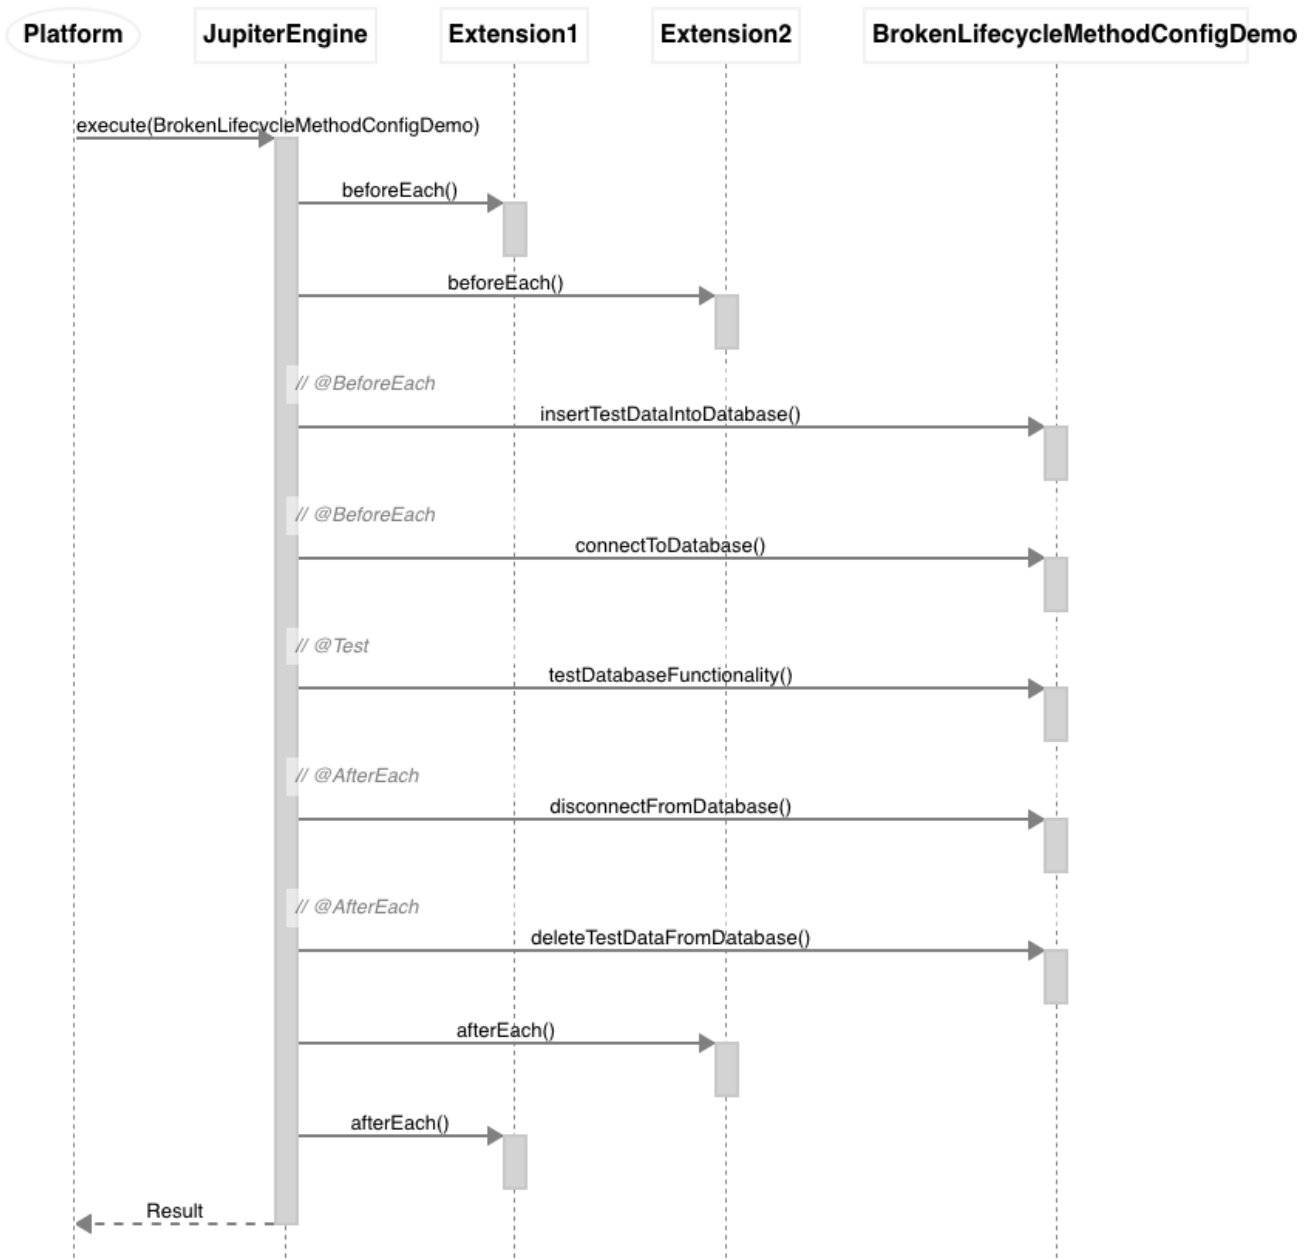

BrokenLifecycleMethodConfigDemo



Due to the aforementioned behavior, the JUnit Team recommends that developers declare at most one of each type of *lifecycle method* (see [Definitions](#)) per test class or test interface unless there are no dependencies between such lifecycle methods.

6. Advanced Topics

6.1. JUnit Platform Reporting

The `junit-platform-reporting` artifact contains `TestExecutionListener` implementations that generate XML test reports in two flavors: [Open Test Reporting](#) and [legacy](#).



The module also contains other `TestExecutionListener` implementations that can be used to build custom reporting. See [Using Listeners and Interceptors](#) for details.

6.1.1. Output Directory

The JUnit Platform provides an `OutputDirectoryProvider` via `EngineDiscoveryRequest` and `TestPlan` to registered `test engines` and `listeners`, respectively. Its root directory can be configured via the following `configuration parameter`:

`junit.platform.reporting.output.dir=<path>`

Configure the output directory for reporting. By default, `build` is used if a Gradle build script is found, and `target` if a Maven POM is found; otherwise, the current working directory is used.

To create a unique output directory per test run, you can use the `{uniqueNumber}` placeholder in the path. For example, `reports/junit-{uniqueNumber}` will create directories like `reports/junit-8803697269315188212`. This can be useful when using Gradle's or Maven's parallel execution capabilities which create multiple JVM forks that run concurrently.

6.1.2. Open Test Reporting

`OpenTestReportGeneratingListener` writes an XML report for the entire execution in the event-based format specified by `Open Test Reporting` which supports all features of the JUnit Platform such as hierarchical test structures, display names, tags, etc.

The listener is auto-registered and can be configured via the following `configuration parameter`:

`junit.platform.reporting.open.xml.enabled=true|false`

Enable/disable writing the report.

If enabled, the listener creates an XML report file named `open-test-report.xml` in the configured `output directory`.

If `output capturing` is enabled, the captured output written to `System.out` and `System.err` will be included in the report as well.



The `Open Test Reporting CLI Tool` can be used to convert from the event-based format to the hierarchical format which is more human-readable.

Gradle

For Gradle, writing Open Test Reporting compatible XML reports can be enabled and configured via system properties. The following samples configure its output directory to be the same directory Gradle uses for its own XML reports. A `CommandLineArgumentProvider` is used to keep the tasks relocatable across different machines which is important when using Gradle's Build Cache.

Groovy DSL

```
dependencies {
    testRuntimeOnly("org.junit.platform:junit-platform-reporting:1.12.0-RC1")
}
tasks.withType(Test).configureEach {
    def outputDir = reports.junitXml.outputLocation
    jvmArgumentProviders << ({
```

```

        [
            "-Djunit.platform.reporting.open.xml.enabled=true",
            "-"
        ]
        Djunit.platform.reporting.output.dir=${outputDir.get().asFile.absolutePath}"
    } as CommandLineArgumentProvider)
}

```

Kotlin DSL

```

dependencies {
    testRuntimeOnly("org.junit.platform:junit-platform-reporting:1.12.0-RC1")
}
tasks.withType<Test>().configureEach {
    val outputDir = reports.junitXml.outputLocation
    jvmArgumentProviders += CommandLineArgumentProvider {
        listOf(
            "-Djunit.platform.reporting.open.xml.enabled=true",
            "-"
        )
        Djunit.platform.reporting.output.dir=${outputDir.get().asFile.absolutePath}"
    }
}
}

```

Maven

For Maven Surefire/Failsafe, you can enable Open Test Reporting output and configure the resulting XML files to be written to the same directory Surefire/Failsafe uses for its own XML reports as follows:

```

<project>
  <!-- ... -->
  <dependencies>
    <dependency>
      <groupId>org.junit.platform</groupId>
      <artifactId>junit-platform-reporting</artifactId>
      <version>1.12.0-RC1</version>
      <scope>test</scope>
    </dependency>
  </dependencies>
  <build>
    <plugins>
      <plugin>
        <artifactId>maven-surefire-plugin</artifactId>
        <version>3.5.2</version>
        <configuration>
          <properties>
            <configurationParameters>
              junit.platform.reporting.open.xml.enabled = true
            </configurationParameters>
          </properties>
        </configuration>
      </plugin>
    </plugins>
  </build>
</project>

```

```

                                junit.platform.reporting.output.dir = target/surefire-
reports
                                </configurationParameters>
                                </properties>
                                </configuration>
                                </plugin>
                                </plugins>
                                </build>
                                <!-- ... -->
</project>

```

Console Launcher

When using the [Console Launcher](#), you can enable Open Test Reporting output by setting the configuration parameters via `--config`:

```

$ java -jar junit-platform-console-standalone-1.12.0-RC1.jar <OPTIONS> \
  --config=junit.platform.reporting.open.xml.enabled=true \
  --config=junit.platform.reporting.output.dir=reports

```

Configuration parameters can also be set in a custom properties file supplied as a classpath resource via the `--config-resource` option:

```

$ java -jar junit-platform-console-standalone-1.12.0-RC1.jar <OPTIONS> \
  --config-resource=configuration.properties

```

6.1.3. Legacy XML format

[LegacyXmlReportGeneratingListener](#) generates a separate XML report for each root in the [TestPlan](#). Note that the generated XML format is compatible with the de facto standard for JUnit 4 based test reports that was made popular by the Ant build system.

The [LegacyXmlReportGeneratingListener](#) is used by the [Console Launcher](#) as well.

6.2. JUnit Platform Suite Engine

The JUnit Platform supports the declarative definition and execution of suites of tests from *any* test engine using the JUnit Platform.

6.2.1. Setup

In addition to the [junit-platform-suite-api](#) and [junit-platform-suite-engine](#) artifacts, you need *at least one* other test engine and its dependencies on the classpath. See [Dependency Metadata](#) for details regarding group IDs, artifact IDs, and versions.

Required Dependencies

- `junit-platform-suite-api` in *test* scope: artifact containing annotations needed to configure a test suite
- `junit-platform-suite-engine` in *test runtime* scope: implementation of the `TestEngine` API for declarative test suites



Both of the required dependencies are aggregated in the `junit-platform-suite` artifact which can be declared in *test* scope instead of declaring explicit dependencies on `junit-platform-suite-api` and `junit-platform-suite-engine`.

Transitive Dependencies

- `junit-platform-suite-commons` in *test* scope
- `junit-platform-launcher` in *test* scope
- `junit-platform-engine` in *test* scope
- `junit-platform-commons` in *test* scope
- `opentest4j` in *test* scope

6.2.2. @Suite Example

By annotating a class with `@Suite` it is marked as a test suite on the JUnit Platform. As seen in the following example, selector and filter annotations can then be used to control the contents of the suite.

```
import org.junit.platform.suite.api.IncludeClassNamePatterns;
import org.junit.platform.suite.api.SelectPackages;
import org.junit.platform.suite.api.Suite;
import org.junit.platform.suite.api.SuiteDisplayName;

@Suite
@SuiteDisplayName("JUnit Platform Suite Demo")
@SelectPackages("example")
@IncludeClassNamePatterns(".*Tests")
class SuiteDemo {
}
```

Additional Configuration Options



There are numerous configuration options for discovering and filtering tests in a test suite. Please consult the Javadoc of the `org.junit.platform.suite.api` package for a full list of supported annotations and further details.

6.2.3. @BeforeSuite and @AfterSuite

`@BeforeSuite` and `@AfterSuite` annotations can be used on methods inside a `@Suite`-annotated class. They will be executed respectively before and after all tests of the test suite.

```

@Suite
@SelectPackages("example")
class BeforeAndAfterSuiteDemo {

    @BeforeSuite
    static void beforeSuite() {
        // executes before the test suite
    }

    @AfterSuite
    static void afterSuite() {
        // executes after the test suite
    }

}

```

6.3. JUnit Platform Test Kit

The `junit-platform-testkit` artifact provides support for executing a test plan on the JUnit Platform and then verifying the expected results. As of JUnit Platform 1.12.0-RC1, this support is limited to the execution of a single `TestEngine` (see [Engine Test Kit](#)).

6.3.1. Engine Test Kit

The `org.junit.platform.testkit.engine` package provides support for executing a `TestPlan` for a given `TestEngine` running on the JUnit Platform and then accessing the results via a fluent API to verify the expected results. The key entry point into this API is the `EngineTestKit` which provides static factory methods named `engine()` and `execute()`. It is recommended that you select one of the `engine()` variants to benefit from the fluent API for building a `LauncherDiscoveryRequest`.



If you prefer to use the `LauncherDiscoveryRequestBuilder` from the `Launcher` API to build your `LauncherDiscoveryRequest`, you must use one of the `execute()` variants in `EngineTestKit`.

The following test class written using JUnit Jupiter will be used in subsequent examples.

```

import static org.junit.jupiter.api.Assertions.assertEquals;
import static org.junit.jupiter.api.Assumptions.assumeTrue;

import example.util.Calculator;

import org.junit.jupiter.api.Disabled;
import org.junit.jupiter.api.MethodOrderer.OrderAnnotation;
import org.junit.jupiter.api.Order;
import org.junit.jupiter.api.Test;
import org.junit.jupiter.api.TestMethodOrder;

```

```

@TestMethodOrder(OrderAnnotation.class)
public class ExampleTestCase {

    private final Calculator calculator = new Calculator();

    @Test
    @Disabled("for demonstration purposes")
    @Order(1)
    void skippedTest() {
        // skipped ...
    }

    @Test
    @Order(2)
    void succeedingTest() {
        assertEquals(42, calculator.multiply(6, 7));
    }

    @Test
    @Order(3)
    void abortedTest() {
        assertTrue("abc".contains("Z"), "abc does not contain Z");
        // aborted ...
    }

    @Test
    @Order(4)
    void failingTest() {
        // The following throws an ArithmeticException: "/" by zero"
        calculator.divide(1, 0);
    }
}

```

For the sake of brevity, the following sections demonstrate how to test JUnit's own `JupiterTestEngine` whose unique engine ID is `"junit-jupiter"`. If you want to test your own `TestEngine` implementation, you need to use its unique engine ID. Alternatively, you may test your own `TestEngine` by supplying an instance of it to the `EngineTestKit.engine(TestEngine)` static factory method.

6.3.2. Asserting Statistics

One of the most common features of the Test Kit is the ability to assert statistics against events fired during the execution of a `TestPlan`. The following tests demonstrate how to assert statistics for *containers* and *tests* in the JUnit Jupiter `TestEngine`. For details on what statistics are available, consult the Javadoc for `EventStatistics`.

```

import static org.junit.platform.engine.discovery.DiscoverySelectors.selectClass;

```

```

import example.ExampleTestCase;

import org.junit.jupiter.api.Test;
import org.junit.platform.testkit.engine.EngineTestKit;

class EngineTestKitStatisticsDemo {

    @Test
    void verifyJupiterContainerStats() {
        EngineTestKit
            .engine("junit-jupiter") ①
            .selectors(selectClass(ExampleTestCase.class)) ②
            .execute() ③
            .containerEvents() ④
            .assertStatistics(stats -> stats.started(2).succeeded(2)); ⑤
    }

    @Test
    void verifyJupiterTestStats() {
        EngineTestKit
            .engine("junit-jupiter") ①
            .selectors(selectClass(ExampleTestCase.class)) ②
            .execute() ③
            .testEvents() ⑥
            .assertStatistics(stats ->
                stats.skipped(1).started(3).succeeded(1).aborted(1).failed(1)); ⑦
    }
}

```

- ① Select the JUnit Jupiter `TestEngine`.
- ② Select the `ExampleTestCase` test class.
- ③ Execute the `TestPlan`.
- ④ Filter by *container* events.
- ⑤ Assert statistics for *container* events.
- ⑥ Filter by *test* events.
- ⑦ Assert statistics for *test* events.



In the `verifyJupiterContainerStats()` test method, the counts for the `started` and `succeeded` statistics are 2 since the `JupiterTestEngine` and the `ExampleTestCase` class are both considered containers.

6.3.3. Asserting Events

If you find that [asserting statistics](#) alone is insufficient for verifying the expected behavior of test execution, you can work directly with the recorded [Event](#) elements and perform assertions against them.

For example, if you want to verify the reason that the `skippedTest()` method in `ExampleTestCase` was skipped, you can do that as follows.



The `assertThatEvents()` method in the following example is a shortcut for `org.assertj.core.api.Assertions.assertThat(events.list())` from the [AssertJ](#) assertion library.

For details on what *conditions* are available for use with AssertJ assertions against events, consult the Javadoc for [EventConditions](#).

```
import static org.junit.platform.engine.discovery.DiscoverySelectors.selectMethod;
import static org.junit.platform.testkit.engine.EventConditions.event;
import static org.junit.platform.testkit.engine.EventConditions.skippedWithReason;
import static org.junit.platform.testkit.engine.EventConditions.test;

import example.ExampleTestCase;

import org.junit.jupiter.api.Test;
import org.junit.platform.testkit.engine.EngineTestKit;
import org.junit.platform.testkit.engine.Events;

class EngineTestKitSkippedMethodDemo {

    @Test
    void verifyJupiterMethodWasSkipped() {
        String methodName = "skippedTest";

        Events testEvents = EngineTestKit ⑤
            .engine("junit-jupiter") ①
            .selectors(selectMethod(ExampleTestCase.class, methodName)) ②
            .execute() ③
            .testEvents(); ④

        testEvents.assertStatistics(stats -> stats.skipped(1)); ⑥

        testEvents.assertThatEvents() ⑦
            .haveExactly(1, event(test(methodName),
                skippedWithReason("for demonstration purposes")));
    }
}
```

- ① Select the JUnit Jupiter `TestEngine`.
- ② Select the `skippedTest()` method in the `ExampleTestCase` test class.
- ③ Execute the `TestPlan`.
- ④ Filter by *test* events.
- ⑤ Save the *test Events* to a local variable.

- ⑥ Optionally assert the expected statistics.
- ⑦ Assert that the recorded *test* events contain exactly one skipped test named `skippedTest` with "for demonstration purposes" as the *reason*.

If you want to verify the type of exception thrown from the `failingTest()` method in `ExampleTestCase`, you can do that as follows.



For details on what *conditions* are available for use with AssertJ assertions against events and execution results, consult the Javadoc for [EventConditions](#) and [TestExecutionResultConditions](#), respectively.

```
import static org.junit.platform.engine.discovery.DiscoverySelectors.selectClass;
import static org.junit.platform.testkit.engine.EventConditions.event;
import static org.junit.platform.testkit.engine.EventConditions.finishedWithFailure;
import static org.junit.platform.testkit.engine.EventConditions.test;
import static org.junit.platform.testkit.engine.TestExecutionResultConditions
    .instanceOf;
import static org.junit.platform.testkit.engine.TestExecutionResultConditions.message;

import example.ExampleTestCase;

import org.junit.jupiter.api.Test;
import org.junit.platform.testkit.engine.EngineTestKit;

class EngineTestKitFailedMethodDemo {

    @Test
    void verifyJupiterMethodFailed() {
        EngineTestKit.engine("junit-jupiter") ①
            .selectors(selectClass(ExampleTestCase.class)) ②
            .execute() ③
            .testEvents() ④
            .assertThatEvents().haveExactly(1, ⑤
                event(test("failingTest"),
                    finishedWithFailure(
                        instanceOf(ArithmeticException.class), message(it -> it
                            .endsWith("by zero")))));
    }
}
```

- ① Select the JUnit Jupiter `TestEngine`.
- ② Select the `ExampleTestCase` test class.
- ③ Execute the `TestPlan`.
- ④ Filter by *test* events.
- ⑤ Assert that the recorded *test* events contain exactly one failing test named `failingTest` with an exception of type `ArithmeticException` and an error message that ends with `"/ by zero"`.

Although typically unnecessary, there are times when you need to verify **all** of the events fired during the execution of a `TestPlan`. The following test demonstrates how to achieve this via the `assertEventsMatchExactly()` method in the `EngineTestKit` API.



Since `assertEventsMatchExactly()` matches conditions exactly in the order in which the events were fired, `ExampleTestCase` has been annotated with `@TestMethodOrder(OrderAnnotation.class)` and each test method has been annotated with `@Order(...)`. This allows us to enforce the order in which the test methods are executed, which in turn allows our `verifyAllJupiterEvents()` test to be reliable.

If you want to do a *partial* match *with* or *without* ordering requirements, you can use the methods `assertEventsMatchLooselyInOrder()` and `assertEventsMatchLoosely()`, respectively.

```
import static org.junit.platform.engine.discovery.DiscoverySelectors.selectClass;
import static org.junit.platform.testkit.engine.EventConditions.abortedWithReason;
import static org.junit.platform.testkit.engine.EventConditions.container;
import static org.junit.platform.testkit.engine.EventConditions.engine;
import static org.junit.platform.testkit.engine.EventConditions.event;
import static org.junit.platform.testkit.engine.EventConditions.finishedSuccessfully;
import static org.junit.platform.testkit.engine.EventConditions.finishedWithFailure;
import static org.junit.platform.testkit.engine.EventConditions.skippedWithReason;
import static org.junit.platform.testkit.engine.EventConditions.started;
import static org.junit.platform.testkit.engine.EventConditions.test;
import static org.junit.platform.testkit.engine.TestExecutionResultConditions
    .instanceOf;
import static org.junit.platform.testkit.engine.TestExecutionResultConditions.message;

import java.io.StringWriter;
import java.io.Writer;

import example.ExampleTestCase;

import org.junit.jupiter.api.Test;
import org.junit.platform.testkit.engine.EngineTestKit;
import org.opentest4j.TestAbortedException;

class EngineTestKitAllEventsDemo {

    @Test
    void verifyAllJupiterEvents() {
        Writer writer = // create a java.io.Writer for debug output

        EngineTestKit.engine("junit-jupiter") ①
            .selectors(selectClass(ExampleTestCase.class)) ②
            .execute() ③
            .allEvents() ④
            .debug(writer) ⑤
            .assertEventsMatchExactly( ⑥
```

```

        event(engine(), started()),
        event(container(ExampleTestCase.class), started()),
        event(test("skippedTest"), skippedWithReason("for demonstration
purposes")),
        event(test("succeedingTest"), started()),
        event(test("succeedingTest"), finishedSuccessfully()),
        event(test("abortedTest"), started()),
        event(test("abortedTest"),
            abortedWithReason(instanceOf(TestAbortedException.class),
                message(m -> m.contains("abc does not contain Z")))),
        event(test("failingTest"), started()),
        event(test("failingTest"), finishedWithFailure(
            instanceOf(ArithmeticException.class), message(it -> it.endsWith
("by zero")))),
        event(container(ExampleTestCase.class), finishedSuccessfully()),
        event(engine(), finishedSuccessfully());
    }
}

```

- ① Select the JUnit Jupiter `TestEngine`.
- ② Select the `ExampleTestCase` test class.
- ③ Execute the `TestPlan`.
- ④ Filter by *all* events.
- ⑤ Print all events to the supplied `writer` for debugging purposes. Debug information can also be written to an `OutputStream` such as `System.out` or `System.err`.
- ⑥ Assert *all* events in exactly the order in which they were fired by the test engine.

The `debug()` invocation from the preceding example results in output similar to the following.

```

All Events:
  Event [type = STARTED, testDescriptor = JupiterEngineDescriptor: [engine:junit-
jupiter], timestamp = 2018-12-14T12:45:14.082280Z, payload = null]
  Event [type = STARTED, testDescriptor = ClassTestDescriptor: [engine:junit-
jupiter]/[class:example.ExampleTestCase], timestamp = 2018-12-14T12:45:14.089339Z,
payload = null]
  Event [type = SKIPPED, testDescriptor = TestMethodTestDescriptor: [engine:junit-
jupiter]/[class:example.ExampleTestCase]/[method:skippedTest()], timestamp = 2018-12-
14T12:45:14.094314Z, payload = 'for demonstration purposes']
  Event [type = STARTED, testDescriptor = TestMethodTestDescriptor: [engine:junit-
jupiter]/[class:example.ExampleTestCase]/[method:succeedingTest()], timestamp = 2018-
12-14T12:45:14.095182Z, payload = null]
  Event [type = FINISHED, testDescriptor = TestMethodTestDescriptor: [engine:junit-
jupiter]/[class:example.ExampleTestCase]/[method:succeedingTest()], timestamp = 2018-
12-14T12:45:14.104922Z, payload = TestExecutionResult [status = SUCCESSFUL, throwable
= null]]
  Event [type = STARTED, testDescriptor = TestMethodTestDescriptor: [engine:junit-
jupiter]/[class:example.ExampleTestCase]/[method:abortedTest()], timestamp = 2018-12-

```



```

14T12:45:14.106121Z, payload = null]
  Event [type = FINISHED, testDescriptor = TestMethodTestDescriptor: [engine:junit-
jupiter]/[class:example.ExampleTestCase]/[method:abortedTest()], timestamp = 2018-12-
14T12:45:14.109956Z, payload = TestExecutionResult [status = ABORTED, throwable =
org.opentest4j.TestAbortedException: Assumption failed: abc does not contain Z]]
  Event [type = STARTED, testDescriptor = TestMethodTestDescriptor: [engine:junit-
jupiter]/[class:example.ExampleTestCase]/[method:failingTest()], timestamp = 2018-12-
14T12:45:14.110680Z, payload = null]
  Event [type = FINISHED, testDescriptor = TestMethodTestDescriptor: [engine:junit-
jupiter]/[class:example.ExampleTestCase]/[method:failingTest()], timestamp = 2018-12-
14T12:45:14.111217Z, payload = TestExecutionResult [status = FAILED, throwable =
java.lang.ArithmeticException: / by zero]]
  Event [type = FINISHED, testDescriptor = ClassTestDescriptor: [engine:junit-
jupiter]/[class:example.ExampleTestCase], timestamp = 2018-12-14T12:45:14.113731Z,
payload = TestExecutionResult [status = SUCCESSFUL, throwable = null]]
  Event [type = FINISHED, testDescriptor = JupiterEngineDescriptor: [engine:junit-
jupiter], timestamp = 2018-12-14T12:45:14.113806Z, payload = TestExecutionResult
[status = SUCCESSFUL, throwable = null]]

```

6.4. JUnit Platform Launcher API

One of the prominent goals of JUnit 5 is to make the interface between JUnit and its programmatic clients – build tools and IDEs – more powerful and stable. The purpose is to decouple the internals of discovering and executing tests from all the filtering and configuration that’s necessary from the outside.

JUnit 5 introduces the concept of a **Launcher** that can be used to discover, filter, and execute tests. Moreover, third party test libraries – like Spock, Cucumber, and FitNesse – can plug into the JUnit Platform’s launching infrastructure by providing a custom **TestEngine**.

The launcher API is in the `junit-platform-launcher` module.

An example consumer of the launcher API is the `ConsoleLauncher` in the `junit-platform-console` project.

6.4.1. Discovering Tests

Having *test discovery* as a dedicated feature of the platform itself frees IDEs and build tools from most of the difficulties they had to go through to identify test classes and test methods in previous versions of JUnit.

Usage Example:

```

import static org.junit.platform.engine.discovery.ClassNameFilter
.includeClassNamePatterns;
import static org.junit.platform.engine.discovery.DiscoverySelectors.selectClass;
import static org.junit.platform.engine.discovery.DiscoverySelectors.selectPackage;

import java.io.PrintWriter;

```

```

import java.nio.file.Path;
import java.nio.file.Paths;

import org.junit.platform.engine.FilterResult;
import org.junit.platform.engine.TestDescriptor;
import org.junit.platform.launcher.Launcher;
import org.junit.platform.launcher.LauncherDiscoveryListener;
import org.junit.platform.launcher.LauncherDiscoveryRequest;
import org.junit.platform.launcher.LauncherSession;
import org.junit.platform.launcher.LauncherSessionListener;
import org.junit.platform.launcher.PostDiscoveryFilter;
import org.junit.platform.launcher.TestExecutionListener;
import org.junit.platform.launcher.TestPlan;
import org.junit.platform.launcher.core.LauncherConfig;
import org.junit.platform.launcher.core.LauncherDiscoveryRequestBuilder;
import org.junit.platform.launcher.core.LauncherFactory;
import org.junit.platform.launcher.listeners.SummaryGeneratingListener;
import org.junit.platform.launcher.listeners.TestExecutionSummary;
import org.junit.platform.reporting.legacy.xml.LegacyXmlReportGeneratingListener;

```

```

LauncherDiscoveryRequest request = LauncherDiscoveryRequestBuilder.request()
    .selectors(
        selectPackage("com.example.mytests"),
        selectClass(MyTestClass.class)
    )
    .filters(
        includeClassNamePatterns(".*Tests")
    )
    .build();

try (LauncherSession session = LauncherFactory.openSession()) {
    TestPlan testPlan = session.getLauncher().discover(request);

    // ... discover additional test plans or execute tests
}

```

You can select classes, methods, and all classes in a package or even search for all tests in the class-path or module-path. Discovery takes place across all participating test engines.

The resulting `TestPlan` is a hierarchical (and read-only) description of all engines, classes, and test methods that fit the `LauncherDiscoveryRequest`. The client can traverse the tree, retrieve details about a node, and get a link to the original source (like class, method, or file position). Every node in the test plan has a *unique ID* that can be used to invoke a particular test or group of tests.

Clients can register one or more `LauncherDiscoveryListener` implementations via the `LauncherDiscoveryRequestBuilder` to gain insight into events that occur during test discovery. By default, the builder registers an "abort on failure" listener that aborts test discovery after the first discovery failure is encountered. The default `LauncherDiscoveryListener` can be changed via the `junit.platform.discovery.listener.default` configuration parameter.

6.4.2. Executing Tests

To execute tests, clients can use the same `LauncherDiscoveryRequest` as in the discovery phase or create a new request. Test progress and reporting can be achieved by registering one or more `TestExecutionListener` implementations with the `Launcher` as in the following example.

```
LauncherDiscoveryRequest request = LauncherDiscoveryRequestBuilder.request()
    .selectors(
        selectPackage("com.example.mytests"),
        selectClass(MyTestClass.class)
    )
    .filters(
        includeClassNamePatterns(".*Tests")
    )
    .build();

SummaryGeneratingListener listener = new SummaryGeneratingListener();

try (LauncherSession session = LauncherFactory.openSession()) {
    Launcher launcher = session.getLauncher();
    // Register a listener of your choice
    launcher.registerTestExecutionListeners(listener);
    // Discover tests and build a test plan
    TestPlan testPlan = launcher.discover(request);
    // Execute test plan
    launcher.execute(testPlan);
    // Alternatively, execute the request directly
    launcher.execute(request);
}

TestExecutionSummary summary = listener.getSummary();
// Do something with the summary...
```

There is no return value for the `execute()` method, but you can use a `TestExecutionListener` to aggregate the results. For examples see the `SummaryGeneratingListener`, `LegacyXmlReportGeneratingListener`, and `UniqueIdTrackingListener`.



All `TestExecutionListener` methods are called sequentially. Methods for start events are called in registration order while methods for finish events are called in reverse order. Test case execution won't start before all `executionStarted` calls have returned.

6.4.3. Registering a TestEngine

See the dedicated section on [TestEngine registration](#) for details.

6.4.4. Registering a PostDiscoveryFilter

In addition to specifying post-discovery filters as part of a `LauncherDiscoveryRequest` passed to the `Launcher` API, `PostDiscoveryFilter` implementations will be discovered at runtime via Java's `ServiceLoader` mechanism and automatically applied by the `Launcher` in addition to those that are part of the request.

For example, an `example.CustomTagFilter` class implementing `PostDiscoveryFilter` and declared within the `/META-INF/services/org.junit.platform.launcher.PostDiscoveryFilter` file is loaded and applied automatically.

6.4.5. Registering a LauncherSessionListener

Registered implementations of `LauncherSessionListener` are notified when a `LauncherSession` is opened (before a `Launcher` first discovers and executes tests) and closed (when no more tests will be discovered or executed). They can be registered programmatically via the `LauncherConfig` that is passed to the `LauncherFactory`, or they can be discovered at runtime via Java's `ServiceLoader` mechanism and automatically registered with `LauncherSession` (unless automatic registration is disabled.)

Tool Support

The following build tools and IDEs are known to provide full support for `LauncherSession`:

- Gradle 4.6 and later
- Maven Surefire/Failsafe 3.0.0-M6 and later
- IntelliJ IDEA 2017.3 and later

Other tools might also work but have not been tested explicitly.

Example Usage

A `LauncherSessionListener` is well suited for implementing once-per-JVM setup/teardown behavior since it's called before the first and after the last test in a launcher session, respectively. The scope of a launcher session depends on the used IDE or build tool but usually corresponds to the lifecycle of the test JVM. A custom listener that starts an HTTP server before executing the first test and stops it after the last test has been executed, could look like this:

src/test/java/example/session/GlobalSetupTeardownListener.java

```
package example.session;

import static java.net.InetAddress.getLoopbackAddress;

import java.io.IOException;
import java.io.UncheckedIOException;
import java.net.InetSocketAddress;
import java.util.concurrent.ExecutorService;
import java.util.concurrent.Executors;
```

```

import com.sun.net.httpserver.HttpServer;

import org.junit.platform.launcher.LauncherSession;
import org.junit.platform.launcher.LauncherSessionListener;
import org.junit.platform.launcher.TestExecutionListener;
import org.junit.platform.launcher.TestPlan;

public class GlobalSetupTeardownListener implements LauncherSessionListener {

    private Fixture fixture;

    @Override
    public void launcherSessionOpened(LauncherSession session) {
        // Avoid setup for test discovery by delaying it until tests are about to be
        // executed
        session.getLauncher().registerTestExecutionListeners(new
TestExecutionListener() {
            @Override
            public void testPlanExecutionStarted(TestPlan testPlan) {
                if (fixture == null) {
                    fixture = new Fixture();
                    fixture.setUp();
                }
            }
        });
    }

    @Override
    public void launcherSessionClosed(LauncherSession session) {
        if (fixture != null) {
            fixture.tearDown();
            fixture = null;
        }
    }
}

static class Fixture {

    private HttpServer server;
    private ExecutorService executorService;

    void setUp() {
        try {
            server = HttpServer.create(new InetSocketAddress(getLoopbackAddress(),
0), 0);
        }
        catch (IOException e) {
            throw new UncheckedIOException("Failed to start HTTP server", e);
        }
        server.createContext("/test", exchange -> {
            exchange.sendResponseHeaders(204, -1);
            exchange.close();
        });
    }
}

```

```

    });
    executorService = Executors.newCachedThreadPool();
    server.setExecutor(executorService);
    server.start(); ①
    int port = server.getAddress().getPort();
    System.setProperty("http.server.host", getLoopbackAddress().
getHostAddress()); ②
    System.setProperty("http.server.port", String.valueOf(port)); ③
}

void tearDown() {
    server.stop(0); ④
    executorService.shutdownNow();
}
}
}

```

- ① Start the HTTP server
- ② Export its host address as a system property for consumption by tests
- ③ Export its port as a system property for consumption by tests
- ④ Stop the HTTP server

This sample uses the HTTP server implementation from the `jdk.httpserver` module that comes with the JDK but would work similarly with any other server or resource. In order for the listener to be picked up by JUnit Platform, you need to register it as a service by adding a resource file with the following name and contents to your test runtime classpath (e.g. by adding the file to `src/test/resources`):

src/test/resources/META-INF/services/org.junit.platform.launcher.LauncherSessionListener

```
example.session.GlobalSetupTearDownListener
```

You can now use the resource from your test:

src/test/java/example/session/HttpTests.java

```

package example.session;

import static org.junit.jupiter.api.Assertions.assertEquals;

import java.net.HttpURLConnection;
import java.net.URI;
import java.net.URL;

import org.junit.jupiter.api.Test;

class HttpTests {

```

```

@Test
void respondsWith204() throws Exception {
    String host = System.getProperty("http.server.host"); ①
    String port = System.getProperty("http.server.port"); ②
    URL url = URI.create("http://" + host + ":" + port + "/test").toURL();

    HttpURLConnection connection = (HttpURLConnection) url.openConnection();
    connection.setRequestMethod("GET");
    int responseCode = connection.getResponseCode(); ③

    assertEquals(204, responseCode); ④
}
}

```

- ① Read the host address of the server from the system property set by the listener
- ② Read the port of the server from the system property set by the listener
- ③ Send a request to the server
- ④ Check the status code of the response

6.4.6. Registering a LauncherInterceptor

In order to intercept the creation of instances of `Launcher` and `LauncherSessionListener` and calls to the `discover` and `execute` methods of the former, clients can register custom implementations of `LauncherInterceptor` via Java's `ServiceLoader` mechanism by setting the `junit.platform.launcher.interceptors.enabled` configuration parameter to `true`.



Since interceptors are registered before the test run starts, the `junit.platform.launcher.interceptors.enabled` configuration parameter can only be supplied as a JVM system property or via the JUnit Platform configuration file (see [Configuration Parameters](#) for details). This configuration parameter cannot be supplied in the `LauncherDiscoveryRequest` that is passed to the `Launcher`.

A typical use case is to create a custom interceptor to replace the `ClassLoader` used by the JUnit Platform to load test classes and engine implementations.

```

import java.io.IOException;
import java.io.UncheckedIOException;
import java.net.URI;
import java.net.URL;
import java.net.URLClassLoader;

import org.junit.platform.launcher.LauncherInterceptor;

public class CustomLauncherInterceptor implements LauncherInterceptor {

    private final URLClassLoader customClassLoader;

    public CustomLauncherInterceptor() throws Exception {

```

```

        ClassLoader parent = Thread.currentThread().getContextClassLoader();
        customClassLoader = new URLClassLoader(new URL[] { URI.create("some.jar"
).toURL() }, parent);
    }

    @Override
    public <T> T intercept(Invocation<T> invocation) {
        Thread currentThread = Thread.currentThread();
        ClassLoader originalClassLoader = currentThread.getContextClassLoader();
        currentThread.setContextClassLoader(customClassLoader);
        try {
            return invocation.proceed();
        }
        finally {
            currentThread.setContextClassLoader(originalClassLoader);
        }
    }

    @Override
    public void close() {
        try {
            customClassLoader.close();
        }
        catch (IOException e) {
            throw new UncheckedIOException("Failed to close custom class loader", e);
        }
    }
}

```

6.4.7. Registering a LauncherDiscoveryListener

In addition to specifying discovery listeners as part of a [LauncherDiscoveryRequest](#) or registering them programmatically via the [Launcher](#) API, custom [LauncherDiscoveryListener](#) implementations can be discovered at runtime via Java's [ServiceLoader](#) mechanism and automatically registered with the [Launcher](#) created via the [LauncherFactory](#).

For example, an `example.CustomLauncherDiscoveryListener` class implementing [LauncherDiscoveryListener](#) and declared within the `/META-INF/services/org.junit.platform.launcher.LauncherDiscoveryListener` file is loaded and registered automatically.

6.4.8. Registering a TestExecutionListener

In addition to the public [Launcher](#) API method for registering test execution listeners programmatically, custom [TestExecutionListener](#) implementations will be discovered at runtime via Java's [ServiceLoader](#) mechanism and automatically registered with the [Launcher](#) created via the [LauncherFactory](#).

For example, an `example.CustomTestExecutionListener` class implementing [TestExecutionListener](#)

and declared within the `/META-INF/services/org.junit.platform.launcher.TestExecutionListener` file is loaded and registered automatically.

6.4.9. Configuring a TestExecutionListener

When a `TestExecutionListener` is registered programmatically via the `Launcher` API, the listener may provide programmatic ways for it to be configured—for example, via its constructor, setter methods, etc. However, when a `TestExecutionListener` is registered automatically via Java's `ServiceLoader` mechanism (see [Registering a TestExecutionListener](#)), there is no way for the user to directly configure the listener. In such cases, the author of a `TestExecutionListener` may choose to make the listener configurable via [configuration parameters](#). The listener can then access the configuration parameters via the `TestPlan` supplied to the `testPlanExecutionStarted(TestPlan)` and `testPlanExecutionFinished(TestPlan)` callback methods. See the [UniqueIdTrackingListener](#) for an example.

6.4.10. Deactivating a TestExecutionListener

Sometimes it can be useful to run a test suite *without* certain execution listeners being active. For example, you might have custom a `TestExecutionListener` that sends the test results to an external system for reporting purposes, and while debugging you might not want these *debug* results to be reported. To do this, provide a pattern for the `junit.platform.execution.listeners.deactivate` *configuration parameter* to specify which execution listeners should be deactivated (i.e. not registered) for the current test run.



Only listeners registered via the `ServiceLoader` mechanism within the `/META-INF/services/org.junit.platform.launcher.TestExecutionListener` file can be deactivated. In other words, any `TestExecutionListener` registered explicitly via the `LauncherDiscoveryRequest` cannot be deactivated via the `junit.platform.execution.listeners.deactivate` *configuration parameter*.

In addition, since execution listeners are registered before the test run starts, the `junit.platform.execution.listeners.deactivate` *configuration parameter* can only be supplied as a JVM system property or via the JUnit Platform configuration file (see [Configuration Parameters](#) for details). This *configuration parameter* cannot be supplied in the `LauncherDiscoveryRequest` that is passed to the `Launcher`.

Pattern Matching Syntax

Refer to [Pattern Matching Syntax](#) for details.

6.4.11. Configuring the Launcher

If you require fine-grained control over automatic detection and registration of test engines and listeners, you may create an instance of `LauncherConfig` and supply that to the `LauncherFactory`. Typically, an instance of `LauncherConfig` is created via the built-in fluent *builder* API, as demonstrated in the following example.

```
LauncherConfig launcherConfig = LauncherConfig.builder()
```

```

.enableTestEngineAutoRegistration(false)
.enableLauncherSessionListenerAutoRegistration(false)
.enableLauncherDiscoveryListenerAutoRegistration(false)
.enablePostDiscoveryFilterAutoRegistration(false)
.enableTestExecutionListenerAutoRegistration(false)
.addTestEngines(new CustomTestEngine())
.addLauncherSessionListeners(new CustomLauncherSessionListener())
.addLauncherDiscoveryListeners(new CustomLauncherDiscoveryListener())
.addPostDiscoveryFilters(new CustomPostDiscoveryFilter())
.addTestExecutionListeners(new LegacyXmlReportGeneratingListener(reportsDir, out))
.addTestExecutionListeners(new CustomTestExecutionListener())
.build();

```

```

LauncherDiscoveryRequest request = LauncherDiscoveryRequestBuilder.request()
    .selectors(selectPackage("com.example.mytests"))
    .build();

```

```

try (LauncherSession session = LauncherFactory.openSession(launcherConfig)) {
    session.getLauncher().execute(request);
}

```

6.4.12. Dry-Run Mode

When running tests via the `Launcher` API, you can enable *dry-run mode* by setting the `junit.platform.execution.dryRun.enabled` configuration parameter to `true`. In this mode, the `Launcher` will not actually execute any tests but will notify registered `TestExecutionListener` instances as if all tests had been skipped and their containers had been successful. This can be useful to test changes in the configuration of a build or to verify a listener is called as expected without having to wait for all tests to be executed.

6.5. Test Engines

A `TestEngine` facilitates *discovery* and *execution* of tests for a particular programming model.

For example, JUnit provides a `TestEngine` that discovers and executes tests written using the JUnit Jupiter programming model (see [Writing Tests](#) and [Extension Model](#)).

6.5.1. JUnit Test Engines

JUnit provides three `TestEngine` implementations.

- `junit-jupiter-engine`: The core of JUnit Jupiter.
- `junit-vintage-engine`: A thin layer on top of JUnit 4 to allow running *vintage* tests (based on JUnit 3.8 and JUnit 4) with the JUnit Platform launcher infrastructure.
- `junit-platform-suite-engine`: Executes declarative suites of tests with the JUnit Platform launcher infrastructure.

6.5.2. Custom Test Engines

You can contribute your own custom `TestEngine` by implementing the interfaces in the `junit-platform-engine` module and *registering* your engine.

Every `TestEngine` must provide its own *unique ID*, *discover* tests from an `EngineDiscoveryRequest`, and *execute* those tests according to an `ExecutionRequest`.

The `junit-` unique ID prefix is reserved for `TestEngines` from the JUnit Team

The JUnit Platform `Launcher` enforces that only `TestEngine` implementations published by the JUnit Team may use the `junit-` prefix for their `TestEngine` IDs.



- If any third-party `TestEngine` claims to be `junit-jupiter` or `junit-vintage`, an exception will be thrown, immediately halting execution of the JUnit Platform.
- If any third-party `TestEngine` uses the `junit-` prefix for its ID, a warning message will be logged. Later releases of the JUnit Platform will throw an exception for such violations.

In order to facilitate test discovery within IDEs and tools prior to launching the JUnit Platform, `TestEngine` implementations are encouraged to make use of the `@Testable` annotation. For example, the `@Test` and `@TestFactory` annotations in JUnit Jupiter are meta-annotated with `@Testable`. Consult the Javadoc for `@Testable` for further details.

If your custom `TestEngine` needs to be configured, consider allowing users to supply configuration via *configuration parameters*. Please note, however, that you are strongly encouraged to use a unique prefix for all configuration parameters supported by your test engine. Doing so will ensure that there are no conflicts between the names of your configuration parameters and those from other test engines. In addition, since configuration parameters may be supplied as JVM system properties, it is wise to avoid conflicts with the names of other system properties. For example, JUnit Jupiter uses `junit.jupiter.` as a prefix of all of its supported configuration parameters. Furthermore, as with the warning above regarding the `junit-` prefix for `TestEngine` IDs, you should not use `junit.` as a prefix for the names of your own configuration parameters.

Although there is currently no official guide on how to implement a custom `TestEngine`, you can consult the implementation of `JUnit Test Engines` or the implementation of third-party test engines listed in the `JUnit 5 wiki`. You will also find various tutorials and blogs on the Internet that demonstrate how to write a custom `TestEngine`.



`HierarchicalTestEngine` is a convenient abstract base implementation of the `TestEngine` SPI (used by the `junit-jupiter-engine`) that only requires implementors to provide the logic for test discovery. It implements execution of `TestDescriptors` that implement the `Node` interface, including support for parallel execution.

6.5.3. Registering a TestEngine

`TestEngine` registration is supported via Java's `ServiceLoader` mechanism.

For example, the `junit-jupiter-engine` module registers its

`org.junit.jupiter.engine.JupiterTestEngine` in a file named `org.junit.platform.engine.TestEngine` within the `/META-INF/services` folder in the `junit-jupiter-engine` JAR.

6.5.4. Requirements



The words "must", "must not", "required", "shall", "shall not", "should", "should not", "recommended", "may", and "optional" in this section are to be interpreted as described in [RFC 2119](#).

Mandatory requirements

For interoperability with build tools and IDEs, `TestEngine` implementations must adhere to the following requirements:

- The `TestDescriptor` returned from `TestEngine.discover()` *must* be the root of a tree of `TestDescriptor` instances. This implies that there *must not* be any cycles between a node and its descendants.
- A `TestEngine` *must* be able to discover `UniqueIdSelectors` for any unique ID that it previously generated and returned from `TestEngine.discover()`. This enables selecting a subset of tests to execute or rerun.
- The `executionSkipped`, `executionStarted`, and `executionFinished` methods of the `EngineExecutionListener` passed to `TestEngine.execute()` *must* be called for every `TestDescriptor` node in the tree returned from `TestEngine.discover()` at most once. Parent nodes *must* be reported as started before their children and as finished after their children. If a node is reported as skipped, there *must not* be any events reported for its descendants.

Enhanced compatibility

Adhering to the following requirements is optional but recommended for enhanced compatibility with build tools and IDEs:

- Unless to indicate an empty discovery result, the `TestDescriptor` returned from `TestEngine.discover()` *should* have children rather than being completely dynamic. This allows tools to display the structure of the tests and to select a subset of tests to execute.
- When resolving `UniqueIdSelectors`, a `TestEngine` *should* only return `TestDescriptor` instances with matching unique IDs including their ancestors but *may* return additional siblings or other nodes that are required for the execution of the selected tests.
- `TestEngines` *should* support [tagging](#) tests and containers so that tag filters can be applied when discovering tests.

7. API Evolution

One of the major goals of JUnit 5 is to improve maintainers' capabilities to evolve JUnit despite its being used in many projects. With JUnit 4 a lot of stuff that was originally added as an internal construct only got used by external extension writers and tool builders. That made changing JUnit 4 especially difficult and sometimes impossible.

That's why JUnit 5 introduces a defined lifecycle for all publicly available interfaces, classes, and methods.

7.1. API Version and Status

Every published artifact has a version number `<major>.<minor>.<patch>`, and all publicly available interfaces, classes, and methods are annotated with `@API` from the `@API Guardian` project. The annotation's `status` attribute can be assigned one of the following values.

Status	Description
INTERNAL	Must not be used by any code other than JUnit itself. Might be removed without prior notice.
DEPRECATED	Should no longer be used; might disappear in the next minor release.
EXPERIMENTAL	Intended for new, experimental features where we are looking for feedback. Use this element with caution; it might be promoted to <code>MAINTAINED</code> or <code>STABLE</code> in the future, but might also be removed without prior notice, even in a patch.
MAINTAINED	Intended for features that will not be changed in a backwards- incompatible way for at least the next minor release of the current major version. If scheduled for removal, it will be demoted to <code>DEPRECATED</code> first.
STABLE	Intended for features that will not be changed in a backwards- incompatible way in the current major version (<code>5.*</code>).

If the `@API` annotation is present on a type, it is considered to be applicable for all public members of that type as well. A member is allowed to declare a different `status` value of lower stability.

7.2. Experimental APIs

The following table lists which APIs are currently designated as *experimental* via `@API(status = EXPERIMENTAL)`. Caution should be taken when relying on such APIs.

Package Name	Name	Since
<code>org.junit.jupiter.api</code>	<code>AssertionsKt.assertInstanceOf(Object, Function0<String>)</code> <i>(method)</i>	5.11
<code>org.junit.jupiter.api</code>	<code>AssertionsKt.assertInstanceOf(Object, String)</code> <i>(method)</i>	5.11
<code>org.junit.jupiter.api</code>	<code>AssertionsKt.assertNotNull(Object)</code> <i>(method)</i>	5.12
<code>org.junit.jupiter.api</code>	<code>AssertionsKt.assertNotNull(Object, Function0<String>)</code> <i>(method)</i>	5.12
<code>org.junit.jupiter.api</code>	<code>AssertionsKt.assertNotNull(Object, String)</code> <i>(method)</i>	5.12

Package Name	Name	Since
org.junit.jupiter.api	AssertionsKt.assertNull(Object) (method)	5.12
org.junit.jupiter.api	AssertionsKt.assertNull(Object , Function0<String>) (method)	5.12
org.junit.jupiter.api	AssertionsKt.assertNull(Object , String) (method)	5.12
org.junit.jupiter.api	AssertionsKt.fail_nonNullableLambda(Function0<String>) (method)	5.12
org.junit.jupiter.api	AutoClose (annotation)	5.11
org.junit.jupiter.api	DisplayNameGenerator.generatedDisplayNameForMethod(List<Class<?>>, Class<?>, Method) (method)	5.12
org.junit.jupiter.api	DisplayNameGenerator.generatedDisplayNameForNestedClass(List<Class<?>>, Class<?>) (method)	5.12
org.junit.jupiter.api	DynamicTest.stream(Iterator<? extends T>) (method)	5.11
org.junit.jupiter.api	DynamicTest.stream(Stream<? extends T>) (method)	5.11
org.junit.jupiter.api	NamedExecutable (interface)	5.11
org.junit.jupiter.api	RepeatedTest.failureThreshold() (annotation attribute)	5.10
org.junit.jupiter.api	RepetitionInfo.getFailureCount() (method)	5.10
org.junit.jupiter.api	RepetitionInfo.getFailureThreshold() (method)	5.10
org.junit.jupiter.api	TestReporter.publishDirectory(Path) (method)	5.12
org.junit.jupiter.api	TestReporter.publishDirectory(String, ThrowingConsumer<Path>) (method)	5.12
org.junit.jupiter.api	TestReporter.publishFile(Path, MediaType) (method)	5.12
org.junit.jupiter.api	TestReporter.publishFile(String, MediaType, ThrowingConsumer<Path>) (method)	5.12
org.junit.jupiter.api.condition	DisabledForJreRange.maxVersion() (annotation attribute)	5.12

Package Name	Name	Since
org.junit.jupiter.api.condition	DisabledForJreRange.minVersion() (<i>annotation attribute</i>)	5.12
org.junit.jupiter.api.condition	DisabledOnJre.versions() (<i>annotation attribute</i>)	5.12
org.junit.jupiter.api.condition	EnabledForJreRange.maxVersion() (<i>annotation attribute</i>)	5.12
org.junit.jupiter.api.condition	EnabledForJreRange.minVersion() (<i>annotation attribute</i>)	5.12
org.junit.jupiter.api.condition	EnabledOnJre.versions() (<i>annotation attribute</i>)	5.12
org.junit.jupiter.api.condition	JRE.currentVersionNumber() (<i>method</i>)	5.12
org.junit.jupiter.api.condition	JRE.isCurrentVersion(int) (<i>method</i>)	5.12
org.junit.jupiter.api.condition	JRE.version() (<i>method</i>)	5.12
org.junit.jupiter.api.extension	AnnotatedElementContext (<i>interface</i>)	5.10
org.junit.jupiter.api.extension	ExtensionContext.publishDirectory(String, ThrowingConsumer<Path>) (<i>method</i>)	5.12
org.junit.jupiter.api.extension	ExtensionContext.publishFile(String, MediaType, ThrowingConsumer<Path>) (<i>method</i>)	5.12
org.junit.jupiter.api.extension	ExtensionContextException.<init>(String, Throwable) (<i>constructor</i>)	5.10
org.junit.jupiter.api.extension	MediaType (<i>class</i>)	5.12
org.junit.jupiter.api.extension	ParameterContext.getAnnotatedElement() (<i>method</i>)	5.10
org.junit.jupiter.api.extension	PreInterruptCallback (<i>interface</i>)	5.12
org.junit.jupiter.api.extension	PreInterruptContext (<i>interface</i>)	5.12
org.junit.jupiter.api.extension	TestInstantiationAwareExtension (<i>interface</i>)	5.12
org.junit.jupiter.api.extension	TestInstantiationAwareExtension\$ExtensionContextScope (<i>enum</i>)	5.12

Package Name	Name	Since
org.junit.jupiter.api.extension	TestTemplateInvocationContextProvider.mayReturnZeroTestTemplateInvocationContexts(ExtensionContext) (method)	5.12
org.junit.jupiter.api.io	TempDir.factory() (annotation attribute)	5.10
org.junit.jupiter.api.io	TempDirFactory (interface)	5.10
org.junit.jupiter.api.parallel	ResourceLock.providers() (annotation attribute)	5.12
org.junit.jupiter.api.parallel	ResourceLock.target() (annotation attribute)	5.12
org.junit.jupiter.api.parallel	ResourceLockTarget (enum)	5.12
org.junit.jupiter.api.parallel	ResourceLocksProvider (interface)	5.12
org.junit.jupiter.params	ArgumentCountValidationMode (enum)	5.12
org.junit.jupiter.params	ParameterizedTest.allowZeroInvocations() (annotation attribute)	5.12
org.junit.jupiter.params	ParameterizedTest.argumentCountValidation() (annotation attribute)	5.12
org.junit.jupiter.params.converter	AnnotationBasedArgumentConverter (class)	5.10
org.junit.jupiter.params.converter	JavaTimeConversionPattern.nullable() (annotation attribute)	5.12
org.junit.jupiter.params.provider	AnnotationBasedArgumentsProvider (class)	5.10
org.junit.jupiter.params.provider	Arguments\$ArgumentSet (class)	5.11
org.junit.jupiter.params.provider	Arguments.argumentSet(String, Object[]) (method)	5.11
org.junit.jupiter.params.provider	EnumSource.from() (annotation attribute)	5.12
org.junit.jupiter.params.provider	EnumSource.to() (annotation attribute)	5.12
org.junit.jupiter.params.provider	FieldSource (annotation)	5.11
org.junit.jupiter.params.provider	FieldSources (annotation)	5.11

Package Name	Name	Since
org.junit.platform.commons.support	AnnotationSupport.findAnnotation(Class<?>, Class<A>, List<Class<?>>) <i>(method)</i>	1.12
org.junit.platform.commons.support	ReflectionSupport.findAllResourcesInClasspathRoot(URI, Predicate<Resource>) <i>(method)</i>	1.11
org.junit.platform.commons.support	ReflectionSupport.findAllResourcesInModule(String, Predicate<Resource>) <i>(method)</i>	1.11
org.junit.platform.commons.support	ReflectionSupport.findAllResourcesInPackage(String, Predicate<Resource>) <i>(method)</i>	1.11
org.junit.platform.commons.support	ReflectionSupport.makeAccessible(Field) <i>(method)</i>	1.12
org.junit.platform.commons.support	ReflectionSupport.streamAllResourcesInClasspathRoot(URI, Predicate<Resource>) <i>(method)</i>	1.11
org.junit.platform.commons.support	ReflectionSupport.streamAllResourcesInModule(String, Predicate<Resource>) <i>(method)</i>	1.11
org.junit.platform.commons.support	ReflectionSupport.streamAllResourcesInPackage(String, Predicate<Resource>) <i>(method)</i>	1.11
org.junit.platform.commons.support	ReflectionSupport.tryToGetResources(String) <i>(method)</i>	1.12
org.junit.platform.commons.support	ReflectionSupport.tryToGetResources(String, ClassLoader) <i>(method)</i>	1.12
org.junit.platform.commons.support	ReflectionSupport.tryToLoadClass(String, ClassLoader) <i>(method)</i>	1.10
org.junit.platform.commons.support	Resource <i>(interface)</i>	1.11
org.junit.platform.commons.support.conversion	ConversionException <i>(class)</i>	1.11
org.junit.platform.commons.support.conversion	ConversionSupport <i>(class)</i>	1.11
org.junit.platform.commons.support.scanning	ClassFilter <i>(class)</i>	1.12
org.junit.platform.commons.support.scanning	ClasspathScanner <i>(interface)</i>	1.12
org.junit.platform.engine	DiscoverySelector.toIdentifier() <i>(method)</i>	1.11

Package Name	Name	Since
org.junit.platform.engine	DiscoverySelectorIdentifier (class)	1.11
org.junit.platform.engine	EngineDiscoveryRequest.getOutputDirectoryProvider() (method)	1.12
org.junit.platform.engine	EngineExecutionListener.fileEntryPublished(TestDescriptor, FileEntry) (method)	1.12
org.junit.platform.engine	ExecutionRequest.getOutputDirectoryProvider() (method)	1.12
org.junit.platform.engine	TestDescriptor.orderChildren(UnaryOperator<List<TestDescriptor>>) (method)	5.12
org.junit.platform.engine.discovery	ClassSelector.getClassLoader() (method)	1.10
org.junit.platform.engine.discovery	ClasspathResourceSelector.getClasspathResources() (method)	1.12
org.junit.platform.engine.discovery	DiscoverySelectorIdentifierParser (interface)	1.11
org.junit.platform.engine.discovery	DiscoverySelectors.parse(DiscoverySelectorIdentifier) (method)	1.11
org.junit.platform.engine.discovery	DiscoverySelectors.parse(String) (method)	1.11
org.junit.platform.engine.discovery	DiscoverySelectors.parseAll(Collection<DiscoverySelectorIdentifier>) (method)	1.11
org.junit.platform.engine.discovery	DiscoverySelectors.parseAll(String[]) (method)	1.11
org.junit.platform.engine.discovery	DiscoverySelectors.selectClass(ClassLoader, String) (method)	1.10
org.junit.platform.engine.discovery	DiscoverySelectors.selectClasspathResource(Set<Resource>) (method)	1.12
org.junit.platform.engine.discovery	DiscoverySelectors.selectIteration(DiscoverySelector, int[]) (method)	1.9
org.junit.platform.engine.discovery	DiscoverySelectors.selectMethod(Class<?>, String, Class<?>[]) (method)	1.10
org.junit.platform.engine.discovery	DiscoverySelectors.selectMethod(ClassLoader, String) (method)	1.10

Package Name	Name	Since
org.junit.platform.engine.discovery	DiscoverySelectors.selectMethod(ClassLoader, String, String) <i>(method)</i>	1.10
org.junit.platform.engine.discovery	DiscoverySelectors.selectMethod(ClassLoader, String, String, String) <i>(method)</i>	1.10
org.junit.platform.engine.discovery	DiscoverySelectors.selectMethod(String, String, Class<?>[]) <i>(method)</i>	1.10
org.junit.platform.engine.discovery	DiscoverySelectors.selectNestedClass(ClassLoader, List<String>, String) <i>(method)</i>	1.10
org.junit.platform.engine.discovery	DiscoverySelectors.selectNestedMethod(ClassLoader, List<String>, String, String) <i>(method)</i>	1.10
org.junit.platform.engine.discovery	DiscoverySelectors.selectNestedMethod(ClassLoader, List<String>, String, String, String) <i>(method)</i>	1.10
org.junit.platform.engine.discovery	DiscoverySelectors.selectNestedMethod(List<Class<?>>, Class<?>, String, Class<?>[]) <i>(method)</i>	1.10
org.junit.platform.engine.discovery	DiscoverySelectors.selectNestedMethod(List<String>, String, String, Class<?>[]) <i>(method)</i>	1.10
org.junit.platform.engine.discovery	IterationSelector <i>(class)</i>	1.9
org.junit.platform.engine.discovery	MethodSelector.getClassLoader() <i>(method)</i>	1.10
org.junit.platform.engine.discovery	MethodSelector.getParameterTypes() <i>(method)</i>	1.10
org.junit.platform.engine.discovery	NestedClassSelector.getClassLoader() <i>(method)</i>	1.10
org.junit.platform.engine.discovery	NestedMethodSelector.getClassLoader() <i>(method)</i>	1.10
org.junit.platform.engine.discovery	NestedMethodSelector.getParameterTypes() <i>(method)</i>	1.10
org.junit.platform.engine.reporting	FileEntry <i>(class)</i>	1.12
org.junit.platform.engine.reporting	OutputDirectoryProvider <i>(interface)</i>	1.12

Package Name	Name	Since
org.junit.platform.engine.support.discovery	EngineDiscoveryRequestResolver\$Builder.addResourceContainerSelectorResolver(Predicate<Resource>) (method)	1.12
org.junit.platform.engine.support.discovery	EngineDiscoveryRequestResolver\$InitializationContext.getPackageFilter() (method)	1.12
org.junit.platform.engine.support.discovery	SelectorResolver.resolve(IterationSelector, Context) (method)	1.9
org.junit.platform.engine.support.store	NamespacedHierarchicalStore (class)	1.10
org.junit.platform.engine.support.store	NamespacedHierarchicalStoreException (class)	1.10
org.junit.platform.launcher	LauncherInterceptor (interface)	1.10
org.junit.platform.launcher	MethodFilter (interface)	1.12
org.junit.platform.launcher	TestExecutionListener.fileEntryPublished(TestIdentifier, FileEntry) (method)	1.12
org.junit.platform.launcher	TestPlan\$Visitor (interface)	1.10
org.junit.platform.launcher	TestPlan.accept(Visitor) (method)	1.10
org.junit.platform.launcher	TestPlan.getOutputDirectoryProvider() (method)	1.12
org.junit.platform.launcher.core	LauncherDiscoveryRequestBuilder.outputDirectoryProvider(OutputDirectoryProvider) (method)	1.12
org.junit.platform.reporting.open.xml	OpenTestReportGeneratingListener (class)	1.9
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.api	Appendable (interface)	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.api	ChildElement (class)	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.api	Context (class)	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.api	DocumentWriter (interface)	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.api	Element (class)	0.1.0

Package Name	Name	Since
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.api	Factory (<i>interface</i>)	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.api	NamespaceRegistry (<i>class</i>)	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.core	Attachments (<i>class</i>)	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.core	CoreFactory (<i>class</i>)	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.core	CpuCores (<i>class</i>)	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.core	Data (<i>class</i>)	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.core	DirectorySource (<i>class</i>)	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.core	File (<i>class</i>)	0.2.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.core	FilePosition (<i>class</i>)	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.core	FileSource (<i>class</i>)	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.core	HostName (<i>class</i>)	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.core	Infrastructure (<i>class</i>)	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.core	Metadata (<i>class</i>)	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.core	OperatingSystem (<i>class</i>)	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.core	Output (<i>class</i>)	0.2.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.core	Reason (<i>class</i>)	0.1.0

Package Name	Name	Since
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.core	Result <i>(class)</i>	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.core	Sources <i>(class)</i>	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.core	Tag <i>(class)</i>	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.core	Tags <i>(class)</i>	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.core	UriSource <i>(class)</i>	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.core	UserName <i>(class)</i>	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.git	Branch <i>(class)</i>	0.2.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.git	Commit <i>(class)</i>	0.2.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.git	GitFactory <i>(class)</i>	0.2.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.git	Repository <i>(class)</i>	0.2.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.git	Status <i>(class)</i>	0.2.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.java	ClassSource <i>(class)</i>	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.java	ClasspathResourceSource <i>(class)</i>	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.java	FileEncoding <i>(class)</i>	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.java	HeapSize <i>(class)</i>	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.java	JavaFactory <i>(class)</i>	0.1.0

Package Name	Name	Since
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.java	JavaVersion <i>(class)</i>	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.java	MethodSource <i>(class)</i>	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.java	PackageSource <i>(class)</i>	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.java	Throwable <i>(class)</i>	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.root	Event <i>(class)</i>	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.root	Events <i>(class)</i>	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.root	Finished <i>(class)</i>	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.root	Reported <i>(class)</i>	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.root	RootFactory <i>(class)</i>	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.events.root	Started <i>(class)</i>	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.schema	Namespace <i>(class)</i>	0.1.0
org.junit.platform.reporting.shadow.org.opentest4j.reporting.schema	QualifiedName <i>(class)</i>	0.1.0
org.junit.platform.suite.api	AfterSuite <i>(annotation)</i>	1.11
org.junit.platform.suite.api	BeforeSuite <i>(annotation)</i>	1.11
org.junit.platform.suite.api	ConfigurationParametersResource <i>(annotation)</i>	1.11
org.junit.platform.suite.api	ConfigurationParametersResources <i>(annotation)</i>	1.11
org.junit.platform.suite.api	Select <i>(annotation)</i>	1.11
org.junit.platform.suite.api	SelectClasses.names() <i>(annotation attribute)</i>	1.10
org.junit.platform.suite.api	SelectMethod <i>(annotation)</i>	1.10

Package Name	Name	Since
org.junit.platform.suite.api	SelectMethods (annotation)	1.10
org.junit.platform.suite.api	Selects (annotation)	1.11
org.junit.platform.testkit.engine	EngineTestKit\$Builder.outputDirectoryProvider(OutputDirectoryProvider) (method)	1.12
org.junit.platform.testkit.engine	Event.fileEntryPublished(TestDescriptor, FileEntry) (method)	1.12
org.junit.platform.testkit.engine	EventConditions.fileEntry(Predicate<FileEntry>) (method)	1.12
org.junit.platform.testkit.engine	EventStatistics.fileEntryPublished(long) (method)	1.12
org.junit.platform.testkit.engine	Events.fileEntryPublished() (method)	1.12
org.junit.platform.testkit.engine	ExecutionRecorder.fileEntryPublished(TestDescriptor, FileEntry) (method)	1.12
org.junit.platform.testkit.engine	TestExecutionResultConditions.rootCause(Condition<Throwable>[]) (method)	1.11

7.3. Deprecated APIs

The following table lists which APIs are currently designated as *deprecated* via `@API(status = DEPRECATED)`. You should avoid using deprecated APIs whenever possible, since such APIs will likely be removed in an upcoming release.

Package Name	Name	Since
org.junit.jupiter.api	DisplayNameGenerator.generatedDisplayNameForMethod(Class<?>, Method) (method)	5.12
org.junit.jupiter.api	DisplayNameGenerator.generatedDisplayNameForNestedClass(Class<?>) (method)	5.12
org.junit.jupiter.api	MethodOrderer\$Alphanumeric (class)	5.7
org.junit.jupiter.api.condition	JRE.currentVersion() (method)	5.12
org.junit.jupiter.api.extension	InvocationInterceptor.interceptDynamicTest(Invocation<Void>, ExtensionContext) (method)	5.8
org.junit.platform.commons.support	AnnotationSupport.findAnnotation(Class<?>, Class<A>, SearchOption) (method)	1.12

Package Name	Name	Since
org.junit.platform.commons.support	ReflectionSupport.loadClass(String) (method)	1.4
org.junit.platform.commons.support	SearchOption (enum)	1.12
org.junit.platform.commons.util	BlacklistedExceptions (class)	1.7
org.junit.platform.commons.util	PreconditionViolationException (class)	1.5
org.junit.platform.commons.util	ReflectionUtils.loadClass(String) (method)	1.4
org.junit.platform.commons.util	ReflectionUtils.loadClass(String, ClassLoader) (method)	1.4
org.junit.platform.commons.util	ReflectionUtils.readFieldValue(Class<T>, String, T) (method)	1.4
org.junit.platform.commons.util	ReflectionUtils.readFieldValue(Field) (method)	1.4
org.junit.platform.commons.util	ReflectionUtils.readFieldValue(Field, Object) (method)	1.4
org.junit.platform.engine	ConfigurationParameters.size() (method)	1.9
org.junit.platform.engine	ExecutionRequest.<init>(TestDescriptor, EngineExecutionListener, ConfigurationParameters) (constructor)	1.11
org.junit.platform.engine	ExecutionRequest.create(TestDescriptor, EngineExecutionListener, ConfigurationParameters) (method)	1.11
org.junit.platform.engine.discovery	MethodSelector.getMethodParameterTypes() (method)	1.10
org.junit.platform.engine.discovery	NestedMethodSelector.getMethodParameterTypes() (method)	1.10
org.junit.platform.engine.reporting	ReportEntry.<init>() (constructor)	5.8
org.junit.platform.engine.support.filter	ClasspathScanningSupport (class)	1.5
org.junit.platform.engine.support.hierarchical	SingleTestExecutor (class)	1.2
org.junit.platform.launcher	TestPlan.add(TestIdentifier) (method)	1.4

Package Name	Name	Since
org.junit.platform.launcher	TestPlan.getChildren(String) <i>(method)</i>	1.10
org.junit.platform.launcher	TestPlan.getTestIdentifier(String) <i>(method)</i>	1.10
org.junit.platform.launcher.core	LauncherDiscoveryRequestBuilder.<init>() <i>(constructor)</i>	1.8
org.junit.platform.launcher.listeners	LegacyReportingUtils <i>(class)</i>	1.6
org.junit.platform.runner	JUnitPlatform <i>(class)</i>	1.8
org.junit.platform.suite.api	UseTechnicalNames <i>(annotation)</i>	1.8
org.junit.platform.testkit.engine	EngineTestKit\$Builder.filters(DiscoveryFilter<?>[]) <i>(method)</i>	1.7
org.junit.platform.testkit.engine	EngineTestKit.execute(String, EngineDiscoveryRequest) <i>(method)</i>	1.7
org.junit.platform.testkit.engine	EngineTestKit.execute(TestEngine, EngineDiscoveryRequest) <i>(method)</i>	1.7

7.4. @API Tooling Support

The [@API Guardian](#) project plans to provide tooling support for publishers and consumers of APIs annotated with [@API](#). For example, the tooling support will likely provide a means to check if JUnit APIs are being used in accordance with [@API](#) annotation declarations.

8. Contributors

Browse the [current list of contributors](#) directly on GitHub.

9. Release Notes

The release notes are available [here](#).

10. Appendix

10.1. Reproducible Builds

Starting with version 5.7, JUnit 5 aims for its non-javadoc JARs to be [reproducible](#).

Under identical build conditions, such as Java version, repeated builds should provide the same output byte-for-byte.

This means that anyone can reproduce the build conditions of the artifacts on Maven Central/Sonatype and produce the same output artifact locally, confirming that the artifacts in the repositories were actually generated from this source code.

10.2. Dependency Metadata

Artifacts for final releases and milestones are deployed to [Maven Central](#), and snapshot artifacts are deployed to Sonatype's [snapshots repository](#) under `/org/junit`.

The sections below list all artifacts with their versions for the three groups: [Platform](#), [Jupiter](#), and [Vintage](#). The [Bill of Materials \(BOM\)](#) contains a list of all of the above artifacts and their versions.



Aligning dependency versions

To ensure that all JUnit artifacts are compatible with each other, their versions should be aligned. If you rely on [Spring Boot](#) for dependency management, please see the corresponding section. Otherwise, instead of managing individual versions of the JUnit artifacts, it is recommended to apply the [BOM](#) to your project. Please refer to the corresponding sections for [Maven](#) or [Gradle](#).

10.2.1. JUnit Platform

- **Group ID:** `org.junit.platform`
- **Version:** `1.12.0-RC1`
- **Artifact IDs:**

`junit-platform-commons`

Common APIs and support utilities for the JUnit Platform. Any API annotated with `@API(status = INTERNAL)` is intended solely for usage within the JUnit framework itself. *Any usage of internal APIs by external parties is not supported!*

`junit-platform-console`

Support for discovering and executing tests on the JUnit Platform from the console. See [Console Launcher](#) for details.

`junit-platform-console-standalone`

An executable *Fat JAR* that contains all dependencies is provided in Maven Central under the [junit-platform-console-standalone](#) directory. See [Console Launcher](#) for details.

`junit-platform-engine`

Public API for test engines. See [Registering a TestEngine](#) for details.

`junit-platform-jfr`

Provides a `LauncherDiscoveryListener` and `TestExecutionListener` for Java Flight Recorder events on the JUnit Platform. See [Flight Recorder Support](#) for details.

`junit-platform-launcher`

Public API for configuring and launching test plans — typically used by IDEs and build tools.

See [JUnit Platform Launcher API](#) for details.

junit-platform-reporting

`TestExecutionListener` implementations that generate test reports — typically used by IDEs and build tools. See [JUnit Platform Reporting](#) for details.

junit-platform-runner

Runner for executing tests and test suites on the JUnit Platform in a JUnit 4 environment. See [Using JUnit 4 to run the JUnit Platform](#) for details.

junit-platform-suite

JUnit Platform Suite artifact that transitively pulls in dependencies on `junit-platform-suite-api` and `junit-platform-suite-engine` for simplified dependency management in build tools such as Gradle and Maven.

junit-platform-suite-api

Annotations for configuring test suites on the JUnit Platform. Supported by the [JUnit Platform Suite Engine](#) and the [JUnitPlatform runner](#).

junit-platform-suite-commons

Common support utilities for executing test suites on the JUnit Platform.

junit-platform-suite-engine

Engine that executes test suites on the JUnit Platform; only required at runtime. See [JUnit Platform Suite Engine](#) for details.

junit-platform-testkit

Provides support for executing a test plan for a given `TestEngine` and then accessing the results via a fluent API to verify the expected results.

10.2.2. JUnit Jupiter

- **Group ID:** `org.junit.jupiter`
- **Version:** `5.12.0-RC1`
- **Artifact IDs:**

junit-jupiter

JUnit Jupiter aggregator artifact that transitively pulls in dependencies on `junit-jupiter-api`, `junit-jupiter-params`, and `junit-jupiter-engine` for simplified dependency management in build tools such as Gradle and Maven.

junit-jupiter-api

JUnit Jupiter API for [writing tests](#) and [extensions](#).

junit-jupiter-engine

JUnit Jupiter test engine implementation; only required at runtime.

junit-jupiter-params

Support for [parameterized tests](#) in JUnit Jupiter.

junit-jupiter-migrationsupport

Support for migrating from JUnit 4 to JUnit Jupiter; only required for support for JUnit 4's `@Ignore` annotation and for running selected JUnit 4 rules.

10.2.3. JUnit Vintage

- **Group ID:** `org.junit.vintage`
- **Version:** `5.12.0-RC1`
- **Artifact ID:**

junit-vintage-engine

JUnit Vintage test engine implementation that allows one to run *vintage* JUnit tests on the JUnit Platform. *Vintage* tests include those written using JUnit 3 or JUnit 4 APIs or tests written using testing frameworks built on those APIs.

10.2.4. Bill of Materials (BOM)

The *Bill of Materials* POM provided under the following Maven coordinates can be used to ease dependency management when referencing multiple of the above artifacts using [Maven](#) or [Gradle](#).

- **Group ID:** `org.junit`
- **Artifact ID:** `junit-bom`
- **Version:** `5.12.0-RC1`

10.2.5. Dependencies

Most of the above artifacts have a dependency in their published Maven POMs on the following *@API Guardian* JAR.

- **Group ID:** `org.apiguardian`
- **Artifact ID:** `apiguardian-api`
- **Version:** `1.1.2`

In addition, most of the above artifacts have a direct or transitive dependency on the following *OpenTest4J* JAR.

- **Group ID:** `org.opentest4j`
- **Artifact ID:** `opentest4j`
- **Version:** `1.3.0`

10.3. Dependency Diagram

